


FLOW SWITCH



| MODEL | CONNECTION TYPE | OPERATING PRESSURE | OPERATING TEMPERATURE | DIMENSIONS | APPLICATION AREA |
|-------------|--------------------|--------------------|-------------------------------|------------------------------------|--|
| FLOW SWITCH | Threaded U Bolt | 400psi 450psi | between 0°C – 49°C with water | 1" – 2" Threaded 2" – 8" U Bolt | Suitable for all liquid carrying wet pipe systems. |

TEST AND DRAIN VALVE

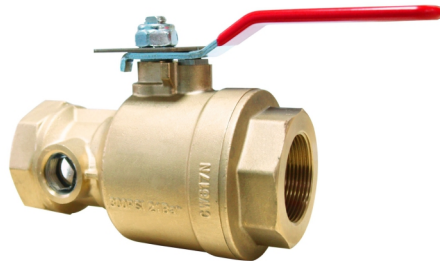

| MODEL | CONNECTION TYPE | OPERATING PRESSURE | OPERATING TEMPERATURE | DIMENSIONS | APPLICATION AREA |
|----------------------|---------------------|--------------------|-----------------------|------------|-------------------------|
| TEST AND DRAIN VALVE | Threaded Grooved | 300psi | - | 1" - 2" | Fire sprinkler systems. |

- It is used to conduct testing and maintenance on sprinkler systems. With the orifice in different sizes inside, it creates a flow equivalent to the flow passing along one sprinkler only and enables tests of alarm devices on the lines for checking purposes in the case of sprinkler water flow.
- ULLIST-FM certified.