


OUTSIDE FIRE CABINET | 1" SEMI – RIGID HOSE REEL, AXIAL WATER SUPPLY

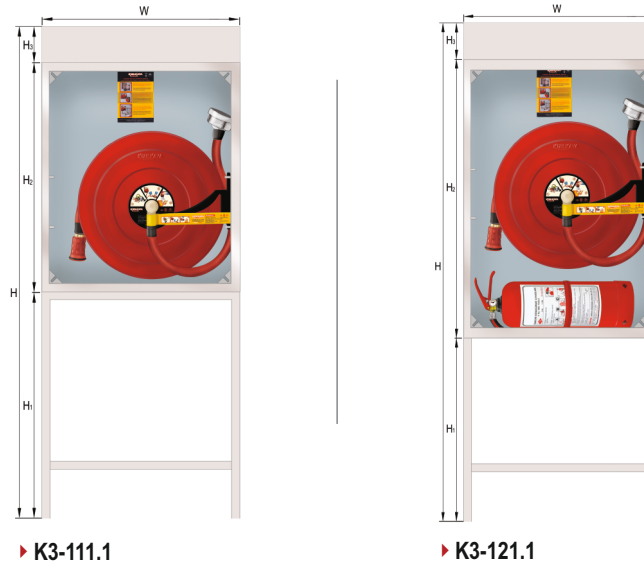

► K3-111.1

► K3-121.1

- 2½" fire valve is optional
- All parts are painted with weather – proof electrostatic powder paint at 200°C, standart colour is red (RAL 3003),other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets can be optionally produced from stainless steel.
- All models can be manufactured with front and rear doors.

CODE	PLACE OF USE	CABINET TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	H ₁ mm	H ₂ mm	H ₃ mm	D mm
K3-111.1	Outdoors	Single Hose Reel	1" - 20 m	-	Optional	700	1500	600	800	100	200
K3-111.2	Outdoors	Single Hose Reel	1" - 25 m	-	Optional	700	1500	600	800	100	200
K3-111.3	Outdoors	Single Hose Reel	1" - 30 m	-	Optional	700	1500	600	800	100	200
K3-121.1	Outdoors	Single Hose Reel, Horizontal Tube Section	1" - 20 m	1 Tube 6 kg	Optional	700	1600	500	1000	100	200
K3-121.2	Outdoors	Single Hose Reel, Horizontal Tube Section	1" - 25 m	1 Tube 6 kg	Optional	700	1600	500	1000	100	200
K3-121.3	Outdoors	Single Hose Reel, Horizontal Tube Section	1" - 30 m	1 Tube 6 kg	Optional	700	1600	500	1000	100	200

► CABINET HOUSING

- Produced of 1,5 mm galvanized metal sheet.
- Suitable for field conditions.
- With special cover and legs for floor installation

► HOSE REEL

- Axial water supply. Water inlet made of rust-resistant material.
- Solid 6 mm crank allows hose reel to be opened at an angle of 270°.
- Includes 2" fire valve and 2" x1" reducing valve.
- Nozzle with 1" jet / spray / lock setting.
- 1 " round, semi – rigid hose.
- Inside hardened connection hose connects hose reel with valve
- All connections are made with press fitting instead of clamp fitting
- All hose reels have been tested.

► CABINET DOOR

- Fixed metal sheet door, chrome plated handle.
- Warning signs on the surface
- 180 degree opening door with continuous hinges, optionally stainless hinges or invisible hinges obtainable.