


OUTDOORS FIRE CABINET

LAY - FLAT HOSE

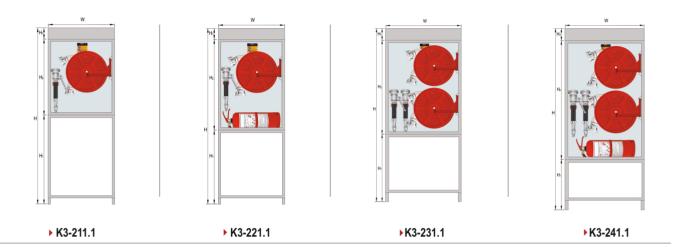

- 2½" flat type fire hose and 2½" fire lance are optional.
- All parts are painted with weather proof electrostatic powder paint at 200°C, standart colour is red (RAL 3003),other colours are available to meet specific needs
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel
- All models can be manufactured with front and rear doors.

CODE	PLACE OF USE	CABINET TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	H, mm	H ₂ mm	H ₃ mm	D mm
K3-211.1	Outdoors	Single Hose Reel	2" - 20 m	-	Optional	600	1400	600	700	100	200
K3-211.3	Outdoors	Single Hose Reel	2" - 30 m	-	Optional	600	1400	600	700	100	200
K3-221.1	Outdoors	Single Hose Reel, Horizontal Tube Section	2" - 20 m	1 Tube 6 kg	Optional	700	1500	600	800	100	200
K3-221.3	Outdoors	Single Hose Reel, Horizontal Tube Section	2" - 30 m	1 Tube 6 kg	Optional	700	1500	600	800	100	200
K3-231.1	Outdoors	Double Hose Reel	2" - 20 m	-	Optional	700	1600	500	1000	100	200
K3-231.3	Outdoors	Double Hose Reel	2" - 30 m	-	Optional	700	1600	500	1000	100	200
K3-241.1	Outdoors	Double Hose Reel, Horizontal Tube Section	2" - 20 m	1 Tube 6 kg	Optional	700	1600	300	1200	100	200
K3-241.3	Outdoors	Double Hose Reel, Horizontal Tube Section	2" - 30 m	1 Tube 6 kg	Optional	700	1600	300	1200	100	200

CABINET HOUSING

- Produced of 1,5 mm galvanized metal sheet.
- Suitable for field conditions.
- With special cover and legs for floor installation

▶HOSE REEL

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire lance and
- 2" lat flay fire hose with 2" hose sleeve
- All connections are made with whipcheck safety cables instead of clamps.

▶ CABINET DOOR

- Fixed metal sheet door, chrome plated handle.
- Warning signs on the surface.
- 180 degree opening door with continuous hinges, optionally stainless hinges or invisible hinges obtainable.

We reserve the right to make changes in design and size. | Our products are patented by the Turkish Patent Office