


FOAM SYSTEM FIRE CABINET | LAY – FLAT HOSE

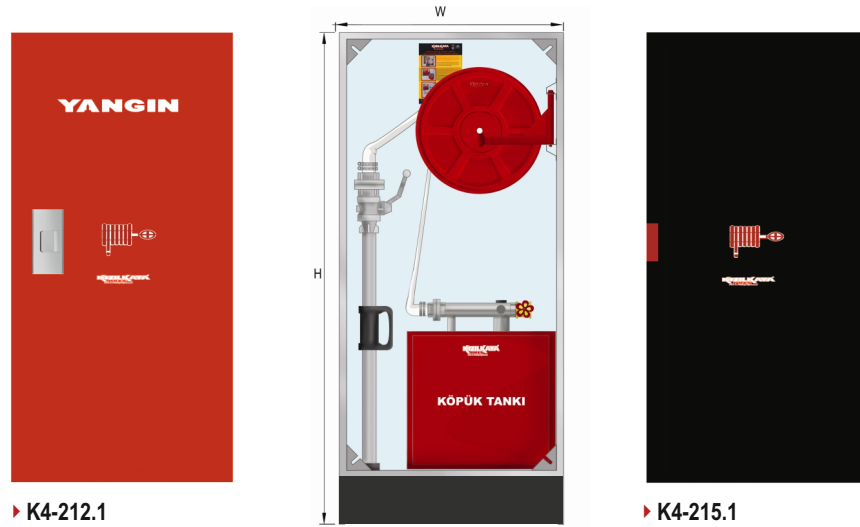

- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL 1013 champagne.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & CAPACITY	TANK CAPACITY	LIGHTING	W mm	H mm	H ₁ mm	H ₂ mm	D mm
K4-212.1	Recessive – Surface	Full Overlay Steel, Stainless Handle	2" - 20 m	50 l	Optional	800	1550	1400	150	300
K4-212.3	Recessive – Surface	Full Overlay Steel, Stainless Handle	2" - 30 m	50 l	Optional	800	1550	1400	150	300
K4-215.1	Recessive – Surface	Full Overlay Glass	2" - 20 m	50 l	Optional	800	1550	1400	150	300
K4-215.3	Recessive – Surface	Full Overlay Glass	2" - 30 m	50 l	Optional	800	1550	1400	150	300

▶ CABINET HOUSING

- Produced from 1.5 mm mild steel (DKP).
- Foam tank made of stainless steel. with 50 l capacity. The tank capacity can be increased depending on demand.
- Recessive or surface mount type obtainable.

▶ HOSE REEL

- Solid 6 mm crank allows hose reel to be opened at an angle of 270°.
- 2" Slide valve
- 2" High pressure foam nozzle and 2" hose sleeve.
- 2" Lay – flat hose
- All connections are made with whipcheck safety cables instead of clamps.
- Foam tank made of stainless steel. with 50 l capacity. The tank capacity can be increased depending on demand.
- 50 l %3 AFFF (Aqueous Film Forming) Foam Capacity can be increased on demand.
- 1" foam mixer

▶ CABINET DOOR

- Modular full overlay l metal sheet doors with stainless steel handle or full overlay glass doors obtainable
- Warning signs on the surface
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.