

FIRE CABINET


1" SEMI - RIGID HOSE REEL, AXIAL WATER SUPPLY

FULL OVERLAY METAL SHEET DOOR, RECESSED HANDLE, WITH FIRE EXTINGUISHER SECTION



► SE1-1711.1

- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL 1013 champagne. Other colours are available to meet specific needs. This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and back opening doors.

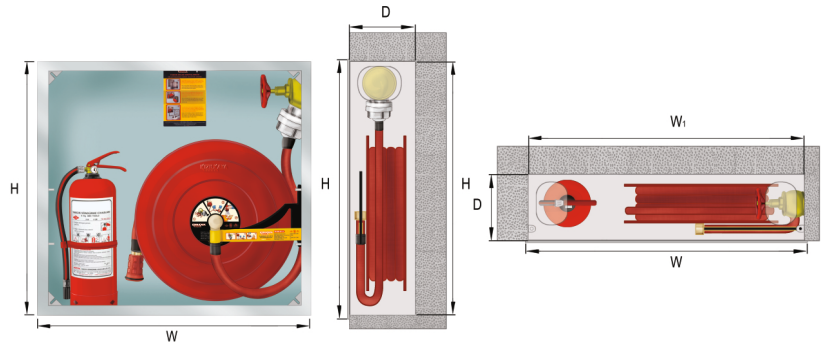

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W _i mm	H _i mm
SE1-1711.1	Recessed	Full Overlay Metal Sheet, Recessed Handle	1" - 20 m	1 Tube / 6 kg	Optional	850	800	200	810	760
SE1-1711.2	Recessed	Full Overlay Metal Sheet, Recessed Handle	1" - 25 m	1 Tube / 6 kg	Optional	850	800	200	810	760
SE1-1711.3	Recessed	Full Overlay Metal Sheet, Recessed Handle	1" - 30 m	1 Tube / 6 kg	Optional	850	800	200	810	760
SE1-1721.1	Surface	Full Overlay Metal Sheet, Recessed Handle	1" - 20 m	1 Tube / 6 kg	Optional	850	800	200	850	800
SE1-1721.2	Surface	Full Overlay Metal Sheet, Recessed Handle	1" - 25 m	1 Tube / 6 kg	Optional	850	800	200	850	800
SE1-1721.3	Surface	Full Overlay Metal Sheet, Recessed Handle	1" - 30 m	1 Tube / 6 kg	Optional	850	800	200	850	800

► CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable

► HOSE REEL

- Axial water supply. Water inlet made of rust-resistant material.
- Solid 6 mm crank allows hose reel to be opened at an angle of 270°.
- Includes 2" fire valve and 2" x1" reducing valve.
- Nozzle with 1" jet / spray / lock setting.
- 1" round, semi - rigid hose.
- Inside hardened connection hose part connects hose reel with valve
- All connections are made with press fitting instead of sleeve - clamp fitting
- All hose reels have been tested.

► CABINET DOOR

- Full Overlay Metal Sheet recessed handle
- Laser cut warning signs on the surface
- After the housing has been mounted on the wall, the inset doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.