


FIRE CABINET

1" SEMI – RIGID HOSE REEL, AXIAL WATER SUPPLY

FULL OVERLAY METAL SHEET, DOUBLE DOOR, CHROME PLATED HANDLE, DOUBLE REEL, HORIZONTAL FIRE EXTINGUISHER SECTION



- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

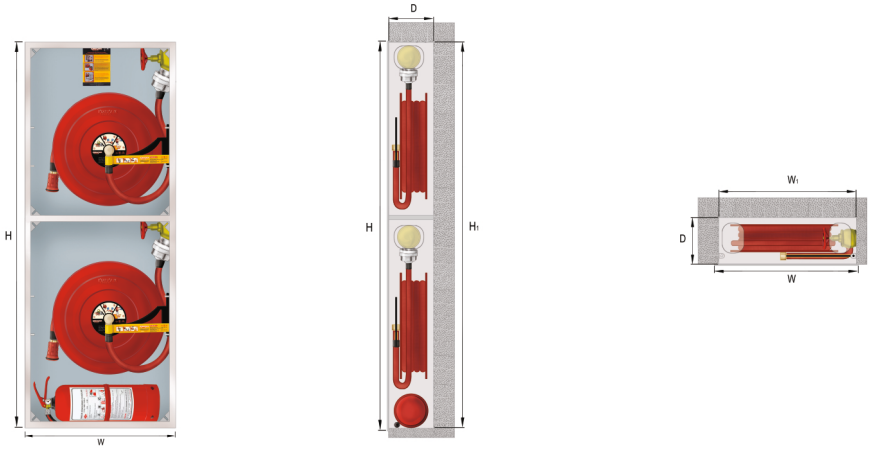

SE1-2412.1

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W _i mm	H _i mm
SE1-2412.1	Recessed	Full Overlay Metal Sheet Double Door, Chrome Plated Handle	1" - 20 m	1 Tube / 6 kg	Optional	700	1800	200	660	1760
SE1-2412.2	Recessed	Full Overlay Metal Sheet Double Door, Chrome Plated Handle	1" - 25 m	1 Tube / 6 kg	Optional	700	1800	200	660	1760
SE1-2412.3	Recessed	Full Overlay Metal Sheet Double Door, Chrome Plated Handle	1" - 30 m	1 Tube / 6 kg	Optional	700	1800	200	660	1760
SE1-2422.1	Surface	Full Overlay Metal Sheet Double Door, Chrome Plated Handle	1" - 20 m	1 Tube / 6 kg	Optional	700	1800	200	700	1800
SE1-2422.2	Surface	Full Overlay Metal Sheet Double Door, Chrome Plated Handle	1" - 25 m	1 Tube / 6 kg	Optional	700	1800	200	700	1800
SE1-2422.3	Surface	Full Overlay Metal Sheet Double Door, Chrome Plated Handle	1" - 30 m	1 Tube / 6 kg	Optional	700	1800	200	700	1800

- YANGIN DOLABININ KASASI
- Produced from 1.2 mm mild steel (DKP).
 - Flaps at every corner for fire valve installation
 - Hose reel can be left or right mounted
 - Surface mount or recessed mount types obtainable.

- YANGIN DOLABININ MAKARASI
- Axial water supply. Water inlet made of rust-resistant material.
 - Solid 6 mm crank allows hose reel to be opened at an angle of 270°.
 - Includes 2" fire valve and 2" x1" reducing valve.
 - Nozzle with 1" jet / spray / lock setting.
 - 1" round, semi – rigid hose.
 - Inside hardened connection hose connects hose reel with valve
 - All connections are made with press fitting instead of clamp fitting
 - All hose reels have been tested.

- YANGIN DOLABININ KAPAĞI
- Full overlay metal sheet double door, chrome plated handle
 - Laser cut signs on the surface
 - After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
 - 180 degree opening door with semi-hidden continuous hinges.