


FIRE CABINET

1" SEMI – RIGID HOSE REEL, AXIAL WATER SUPPLY  
INSET DOUBLE GLASS DOOR, DOUBLE REEL, HORIZONTAL FIRE EXTINGUISHER SECTION



- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

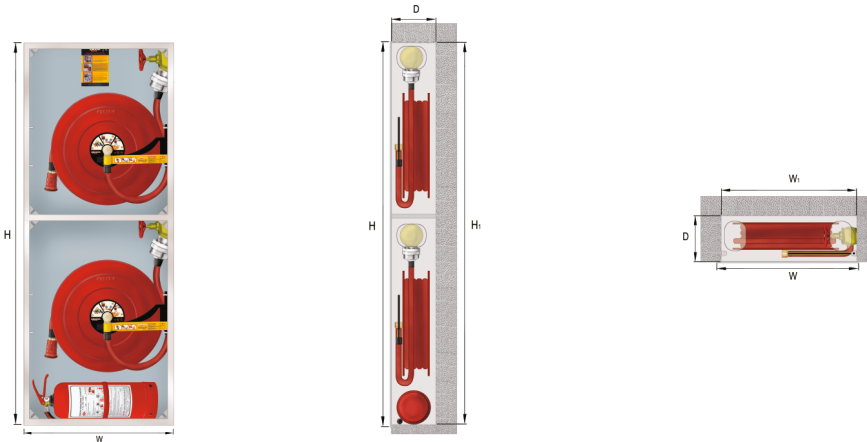

SE1-2414.1

| CODE       | MOUNTING STYLE | MODULAR DOOR TYPE       | HOSE DIAMETER & LENGTH | TUBE CAPACITY | LIGHTING | W<br>mm | H<br>mm | D<br>mm | W <sub>i</sub><br>mm | H <sub>i</sub><br>mm |
|------------|----------------|-------------------------|------------------------|---------------|----------|---------|---------|---------|----------------------|----------------------|
| SE1-2414.1 | Recessed       | Inset Glass Double Door | 1" - 20 m              | 1 Tube / 6 kg | Optional | 700     | 1800    | 200     | 660                  | 1760                 |
| SE1-2414.2 | Recessed       | Inset Glass Double Door | 1" - 25 m              | 1 Tube / 6 kg | Optional | 700     | 1800    | 200     | 660                  | 1760                 |
| SE1-2414.3 | Recessed       | Inset Glass Double Door | 1" - 30 m              | 1 Tube / 6 kg | Optional | 700     | 1800    | 200     | 660                  | 1760                 |
| SE1-2424.1 | Surface        | Inset Glass Double Door | 1" - 20 m              | 1 Tube / 6 kg | Optional | 700     | 1800    | 200     | 700                  | 1800                 |
| SE1-2424.2 | Surface        | Inset Glass Double Door | 1" - 25 m              | 1 Tube / 6 kg | Optional | 700     | 1800    | 200     | 700                  | 1800                 |
| SE1-2424.3 | Surface        | Inset Glass Double Door | 1" - 30 m              | 1 Tube / 6 kg | Optional | 700     | 1800    | 200     | 700                  | 1800                 |

CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable.

HOSE REEL

- Axial water supply. Water inlet made of rust-resistant material.
- Solid 6 mm crank allows hose reel to be opened at an angle of 270°.
- Includes 2" fire valve and 2" x1" reducing valve.
- Nozzle with 1" jet / spray / lock setting.
- 1" round, semi – rigid hose.
- Inside hardened connection hose connects hose reel with valve.
- All connections are made with press fitting instead of clamp fitting
- All hose reels have been tested.

CABINET DOOR

- Inset glass door with radial frame, chrome plated handle.
- 4 mm thick tempered smoke glass
- Screen printed warning signs are fired at 700°C
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with continuous hinges, optionally stainless hinges or invisible hinges obtainable.