

FIRE CABINET


1" SEMI – RIGID HOSE REEL, AXIAL WATER SUPPLY

FULL OVERLAY GLASS DOOR WITH FRAME, CHROME PLATED HANDLE, DOUBLE HOSE REEL, VERTICAL FIRE EXTINGUISHER SECTION FOR 2 TUBES



▶ SE1-2516.1

- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

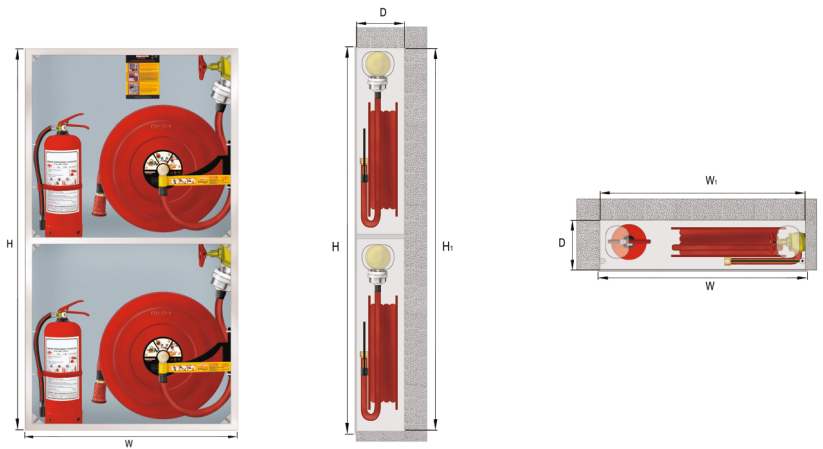

| CODE | MOUNTING STYLE | MODULAR DOOR TYPE | HOSE DIAMETER & LENGTH | TUBE CAPACITY | LIGHTING | W mm | H mm | D mm | W ₁ mm | H ₁ mm |
|------------|----------------|--|------------------------|----------------|----------|------|------|------|-------------------|-------------------|
| SE1-2516.1 | Recessed | Full Overlay Glass Door With Frame, Chrome Plated Handle | 1" - 20 m | 2 Tubes / 6 kg | Optional | 850 | 1600 | 200 | 810 | 1560 |
| SE1-2516.2 | Recessed | Full Overlay Glass Door With Frame, Chrome Plated Handle | 1" - 25 m | 2 Tubes / 6 kg | Optional | 850 | 1600 | 200 | 810 | 1560 |
| SE1-2516.3 | Recessed | Full Overlay Glass Door With Frame, Chrome Plated Handle | 1" - 30 m | 2 Tubes / 6 kg | Optional | 850 | 1600 | 200 | 810 | 1560 |
| SE1-2526.1 | Surface | Full Overlay Glass Door With Frame, Chrome Plated Handle | 1" - 20 m | 2 Tubes / 6 kg | Optional | 850 | 1600 | 200 | 850 | 1600 |
| SE1-2526.2 | Surface | Full Overlay Glass Door With Frame, Chrome Plated Handle | 1" - 25 m | 2 Tubes / 6 kg | Optional | 850 | 1600 | 200 | 850 | 1600 |
| SE1-2526.3 | Surface | Full Overlay Glass Door With Frame, Chrome Plated Handle | 1" - 30 m | 2 Tubes / 6 kg | Optional | 850 | 1600 | 200 | 850 | 1600 |

▶ **CABINET HOUSING**

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation.
- Hose reel can be left or right mounted.
- Surface mount or recessed mount types obtainable.

▶ **HOSE REEL**

- Axial water supply. Water inlet made of rust-resistant material.
- Solid 6 mm crank allows hose reel to be opened at an angle of 270°.
- Includes 2" fire valve and 2" x1" reducing valve.
- Nozzle with 1" jet / spray / lock setting.
- 1" round, semi – rigid hose.
- Inside hardened connection hose connects hose reel with valve
- All connections are made with press fitting instead of clamp fitting
- All hose reels have been tested.

▶ **CABINET DOOR**

- Full overlay glass door with frame, chrome plated handle.
- 4 mm thick tempered smoke glass
- Screen printed warning signs are fired at 700°C
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.