

FIRE CABINET


1" SEMI – RIGID HOSE REEL, AXIAL WATER SUPPLY

FULL OVERLAY GLASS WITH FRAME, DOUBLE DOOR, CHROME PLATED HANDLE, DOUBLE HOSE REEL, VERTICAL FIRE EXTINGUISHER SECTION FOR 2 TUBES



► SE1-2616.1

- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

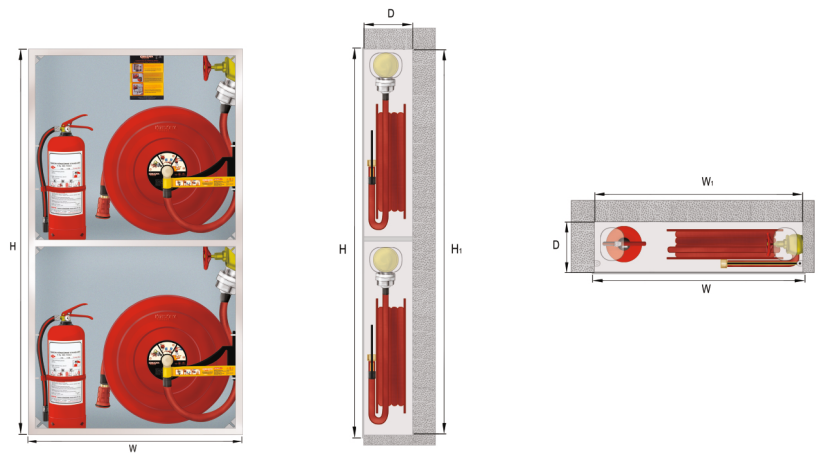

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE1-2616.1	Recessed	Full Overlay Glass Door With Frame, Chrome Plated Handle	1" - 20 m	2 Tubes / 6 kg	Optional	850	1600	200	810	1560
SE1-2616.2	Recessed	Full Overlay Glass Door With Frame, Chrome Plated Handle	1" - 25 m	2 Tubes / 6 kg	Optional	850	1600	200	810	1560
SE1-2616.3	Recessed	Full Overlay Glass Door With Frame, Chrome Plated Handle	1" - 30 m	2 Tubes / 6 kg	Optional	850	1600	200	810	1560
SE1-2626.1	Surface	Full Overlay Glass Door With Frame, Chrome Plated Handle	1" - 20 m	2 Tubes / 6 kg	Optional	850	1600	200	850	1600
SE1-2626.2	Surface	Full Overlay Glass Door With Frame, Chrome Plated Handle	1" - 25 m	2 Tubes / 6 kg	Optional	850	1600	200	850	1600
SE1-2626.3	Surface	Full Overlay Glass Door With Frame, Chrome Plated Handle	1" - 30 m	2 Tubes / 6 kg	Optional	850	1600	200	850	1600

► **CABINET HOUSING**

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation.
- Hose reel can be left or right mounted.
- Surface mount or recessed mount types obtainable.

► **HOSE REEL**

- Axial water supply. Water inlet made of rust-resistant material.
- Solid 6 mm crank allows hose reel to be opened at an angle of 270°.
- Includes 2" fire valve and 2" x1" reducing valve.
- Nozzle with 1" jet / spray / lock setting.
- 1" round, semi – rigid hose.
- Inside hardened connection hose connects hose reel with valve
- All connections are made with press fitting instead of clamp fitting
- All hose reels have been tested

► **CABINET DOOR**

- Full overlay glass door with frame, chrome plated handle.
- 4 mm thick tempered smoke glass
- Screen printed warning signs are fired at 700°C
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.