



FIRE CABINET

LAY – FLAT HOSE

SINGLE FULL OVERLAY GLASS DOOR WITH FRAME, CHROME PLATED HANDLE, DOUBLE HOSE REEL, HORIZONTAL FIRE EXTINGUISHER SECTION

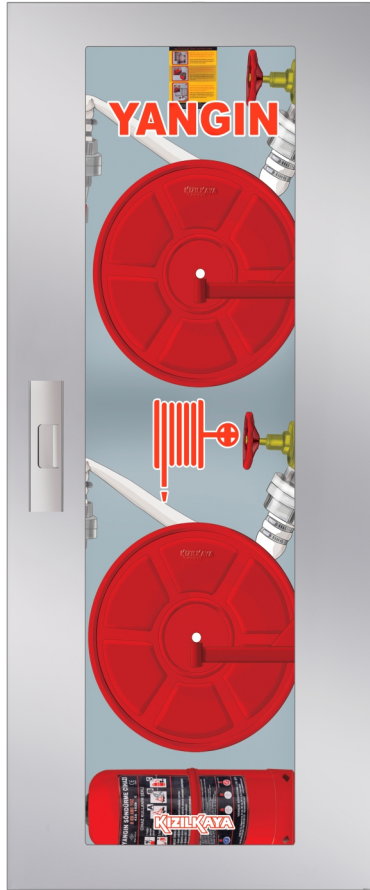

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

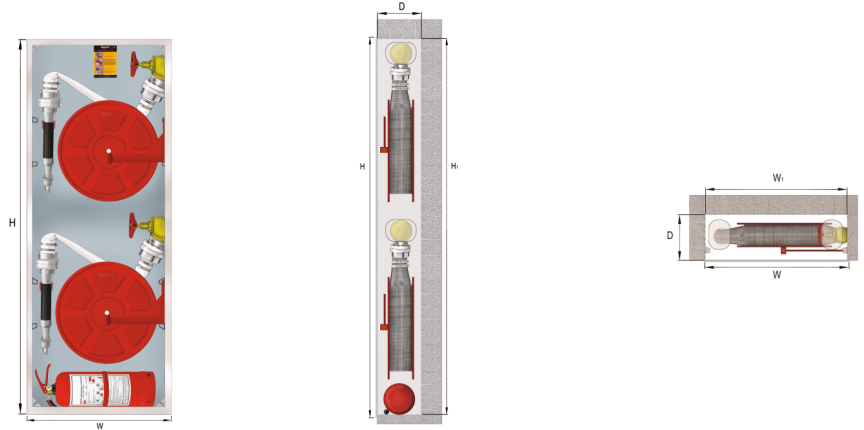

► **SE2-2916.1**

| CODE | MOUNTING STYLE | MODULAR DOOR TYPE | HOSE DIAMETER & LENGTH | TUBE CAPACITY | LIGHTING | W mm | H mm | D mm | W ₁ mm | H ₁ mm |
|------------|----------------|--|------------------------|---------------|----------|------|------|------|-------------------|-------------------|
| SE2-2916.1 | Recessed | Full Overlay Glass Door With Frame, Chrome Plated Handle | 2" - 20 m | 1 Tube / 6 kg | Optional | 700 | 1600 | 200 | 660 | 1560 |
| SE2-2916.3 | Recessed | Full Overlay Glass Door With Frame, Chrome Plated Handle | 2" - 30 m | 1 Tube / 6 kg | Optional | 700 | 1600 | 200 | 660 | 1560 |
| SE2-2926.1 | Surface | Full Overlay Glass Door With Frame, Chrome Plated Handle | 2" - 20 m | 1 Tube / 6 kg | Optional | 700 | 1600 | 200 | 700 | 1600 |
| SE2-2926.3 | Surface | Full Overlay Glass Door With Frame, Chrome Plated Handle | 2" - 30 m | 1 Tube / 6 kg | Optional | 700 | 1600 | 200 | 700 | 1600 |

► **CABINET HOUSING**

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation.
- Hose reel can be left or right mounted.
- Surface mount or recessed mount types obtainable.

► **HOSE REEL**

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► **CABINET DOOR**

- Full overlay glass door with frame, chrome plated handle
- 4 mm thick tempered smoke glass
- Screen printed warning signs are fired at 700°C
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.