


FIRE CABINET


LAY-FLAT HOSE

FULL OVERLAY GLASS, DOUBLE DOOR, DOUBLE HOSE REEL, VERTICAL FIRE EXTINGUISHER SECTION FOR 2 TUBES

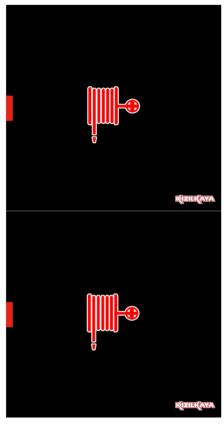


▶ SE2-3215.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.







| CODE | MOUNTING STYLE | MODULAR DOOR TYPE | HOSE DIAMETER & LENGTH | TUBE CAPACITY | LIGHTING | W mm | H mm | D mm | W₁ mm | H, mm |
|------------|----------------|---------------------------------|------------------------|----------------|----------|---------|---------|---------|----------|----------|
| SE2-3215.1 | Recessed | Full Overlay Glass, Double Door | 2" - 20 m | 2 Tubes / 6 kg | Optional | 800 | 1400 | 200 | 760 | 1360 |
| SE2-3215.3 | Recessed | Full Overlay Glass, Double Door | 2" - 30 m | 2 Tubes / 6 kg | Optional | 800 | 1400 | 200 | 760 | 1360 |
| SE2-3225.1 | Surface | Full Overlay Glass, Double Door | 2" - 20 m | 2 Tubes / 6 kg | Optional | 800 | 1400 | 200 | 800 | 1400 |
| SE2-3225.3 | Surface | Full Overlay Glass, Double Door | 2" - 30 m | 2 Tubes / 6 kg | Optional | 800 | 1400 | 200 | 800 | 1400 |

CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation.
- · Hose reel can be left or right mounted.
- Surface mount or recessed mount types obtainable.

▶HOSE REEL

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" lat flay fire hose
- All connections are made with whipcheck safety cables instead of clamps.

CABINET DOOR

- Full overlay glass door,
- 4 mm thick tempered blackglass
- Screen printed warning signs are fired at 700°C
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.