


Category 2

Fire Cabinets Lay – Flat Hose for Indoor

FIRE CABINET


LAY- FLAT HOSE

FULL OVERLAY METAL SHEET DOOR, RECESSED HANDLE

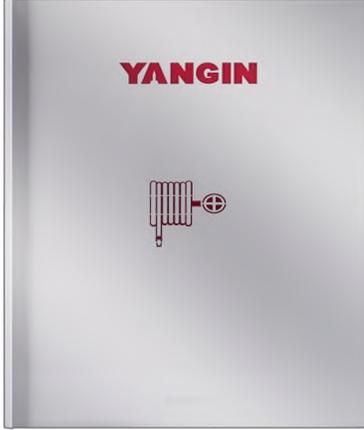

► SE2-2211.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

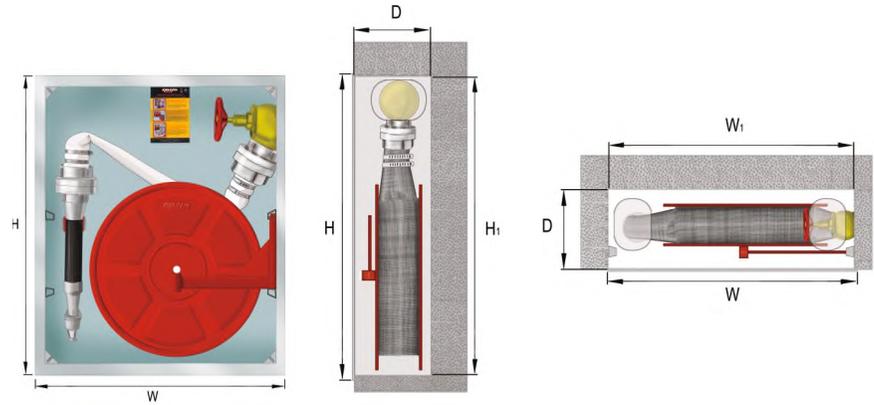

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-2211.1	Recessed	Full Overlay Metal Sheet Door, Recessed Handle	2" - 20 m	-	Optional	600	700	200	560	660
SE2-2211.3	Recessed	Full Overlay Metal Sheet Door, Recessed Handle	2" - 30 m	-	Optional	600	700	200	560	660
SE2-2221.1	Surface	Full Overlay Metal Sheet Door, Recessed Handle	2" - 20 m	-	Optional	600	700	200	600	700
SE2-2221.3	Surface	Full Overlay Metal Sheet Door, Recessed Handle	2" - 30 m	-	Optional	600	700	200	600	700

► CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable

► HOSE REEL

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" lat flay fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► CABINET DOOR

- Full overlay metal sheet door, recessed handle
- Laser cut warning signs on the surface.
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.

FIRE CABINET


LAY- FLAT HOSE

FULL OVERLAY METAL SHEET DOOR, CHROME PLATED HANDLE



▶ SE2-2212.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various

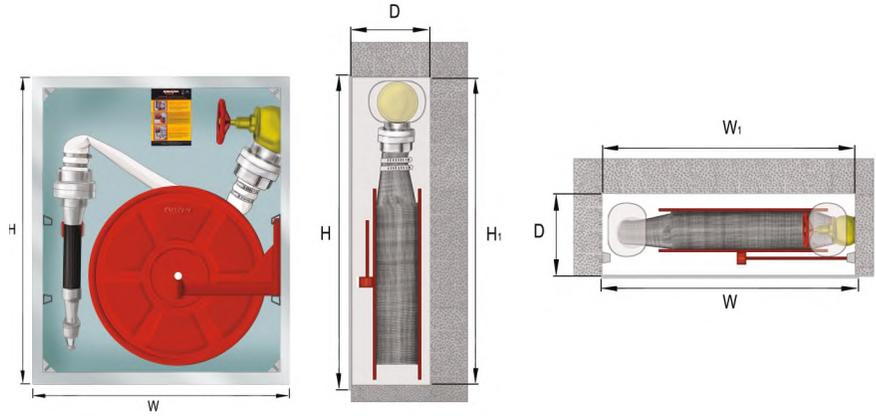

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-2212.1	Recessed	Full Overlay Metal Sheet Door, Chrome Plated Handle	2" - 20 m	-	Optional	600	700	200	560	660
SE2-2212.3	Recessed	Full Overlay Metal Sheet Door, Chrome Plated Handle	2" - 30 m	-	Optional	600	700	200	560	660
SE2-2222.1	Surface	Full Overlay Metal Sheet Door, Chrome Plated Handle	2" - 20 m	-	Optional	600	700	200	600	700
SE2-2222.3	Surface	Full Overlay Metal Sheet Door, Chrome Plated Handle	2" - 30 m	-	Optional	600	700	200	600	700

▶ **CABINET HOUSING**

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable

▶ **HOSE REEL**

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.

▶ **CABINET DOOR**

- Full overlay metal sheet door, chrome plated handle
- Laser cut warning signs on the surface
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.

FIRE CABINET


LAY- FLAT HOSE

INSET METAL SHEET DOOR



► SE2-2213.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

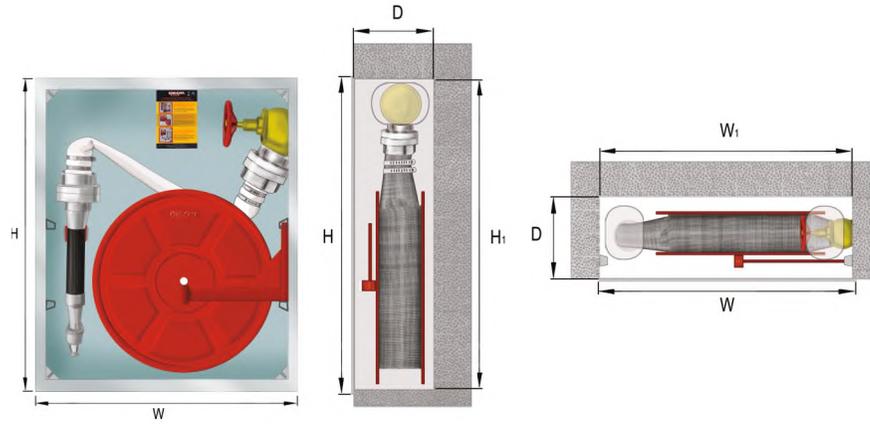

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W _i mm	H _i mm
SE2-2213.1	Recessed	Inset Metal Sheet Door	2" - 20 m	-	Optional	600	700	200	560	660
SE2-2213.3	Recessed	Inset Metal Sheet Door	2" - 30 m	-	Optional	600	700	200	560	660
SE2-2223.1	Surface	Inset Metal Sheet Door	2" - 20 m	-	Optional	600	700	200	600	700
SE2-2223.3	Surface	Inset Metal Sheet Door	2" - 30 m	-	Optional	600	700	200	600	700

► CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable

► HOSE REEL

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" lat flay fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► CABINET DOOR

- Inset metal sheet door with radial frame, chrome plated handle
- Relief warning signs on the surface.
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with continuous hinges, optionally stainless hinges or invisible hinges obtainable.


FIRE CABINET

LAY- FLAT HOSE
INSET GLASS DOOR



► SE2-2214.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

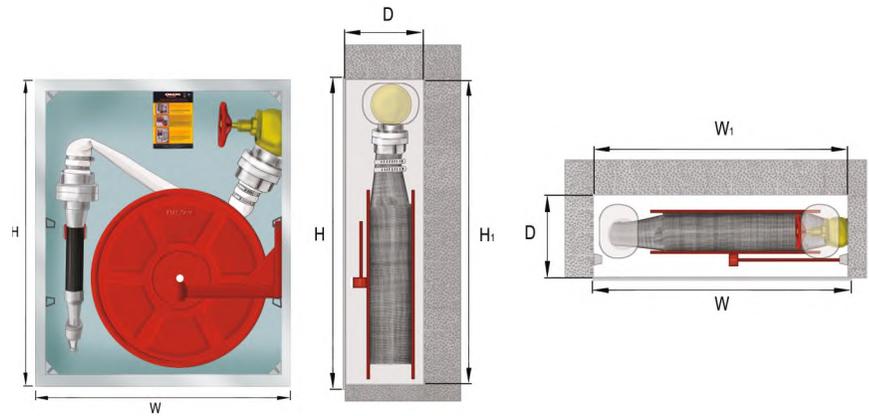

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-2214.1	Recessed	Inset Glass Door	2" - 20 m	-	Optional	600	700	200	560	660
SE2-2214.3	Recessed	Inset Glass Door	2" - 30 m	-	Optional	600	700	200	560	660
SE2-2224.1	Surface	Inset Glass Door	2" - 20 m	-	Optional	600	700	200	600	700
SE2-2224.3	Surface	Inset Glass Door	2" - 30 m	-	Optional	600	700	200	600	700

► **CABINET HOUSING**

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable.

► **HOSE REEL**

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" lat flay fire hose
- All connections are made with whipcheck safety cables instead of clamps.


► **CABINET DOOR**

- Inset glass door with radial frame, chrome plated handle.
- 4 mm thick tempered smoke glass
- Screen printed warning signs are fired at 700°C
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with continuous hinges, optionally stainless hinges or invisible hinges obtainable.

FIRE CABINET


LAY- FLAT HOSE

FULL OVERLAY GLASS DOOR

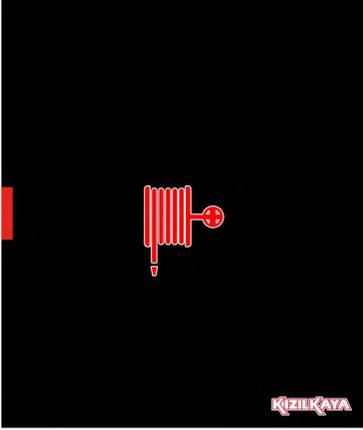

► SE2-2215.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

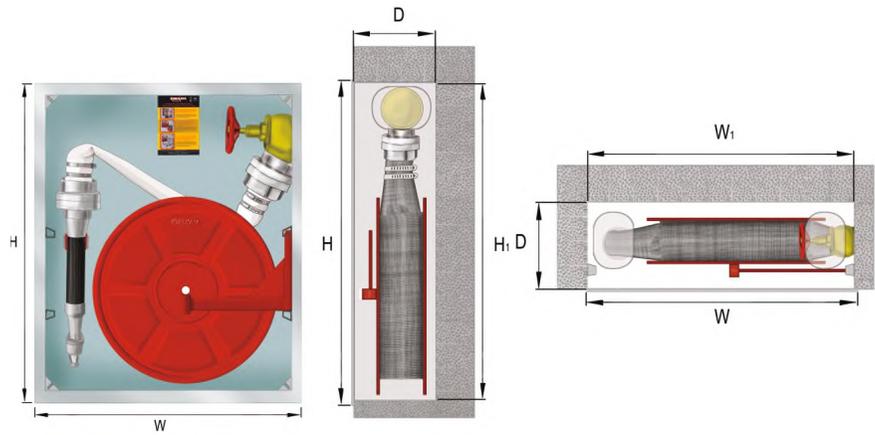

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W	H	D	W ₁	H ₁
						mm	mm	mm	mm	mm
SE2-2215.1	Recessed	Full Overlay Glass Door	2" - 20 m	-	Optional	600	700	200	560	660
SE2-2215.3	Recessed	Full Overlay Glass Door	2" - 30 m	-	Optional	600	700	200	560	660
SE2-2225.1	Surface	Full Overlay Glass Door	2" - 20 m	-	Optional	600	700	200	600	700
SE2-2225.3	Surface	Full Overlay Glass Door	2" - 30 m	-	Optional	600	700	200	600	700

► CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable.

► HOSE REEL

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" lat flay fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► CABINET DOOR

- Full overlay glass door
- 4 mm thick tempered black glass
- Screen printed warning signs are fired at 700°C
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.

FIRE CABINET


LAY- FLAT HOSE

FULL OVERLAY GLASS DOOR WITH RADIAL FRAME, CHROME PLATED HANDLE



▶ SE2-2216.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

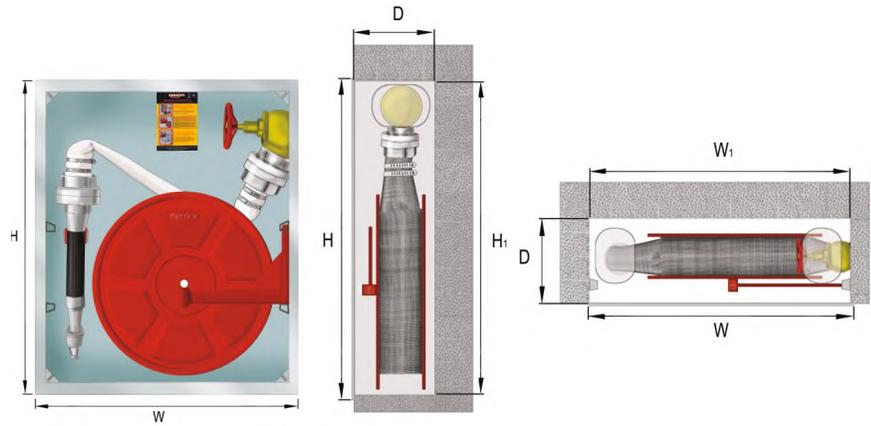

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-2216.1	Recessed	Full Overlay Glass Door, Chrome Plated Handle	2" - 20 m	-	Optional	600	700	200	560	660
SE2-2216.3	Recessed	Full Overlay Glass Door, Chrome Plated Handle	2" - 30 m	-	Optional	600	700	200	560	660
SE2-2226.1	Surface	Full Overlay Glass Door, Chrome Plated Handle	2" - 20 m	-	Optional	600	700	200	600	700
SE2-2226.3	Surface	Full Overlay Glass Door, Chrome Plated Handle	2" - 30 m	-	Optional	600	700	200	600	700

▶ **CABINET HOUSING**

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable.

▶ **HOSE REEL**

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" lay flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.

▶ **CABINET DOOR**

- Full overlay glass door with radial frame chrome plated handle
- 4 mm thick tempered smoke glass
- Screen printed warning signs are fired at 700°C
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.

FIRE CABINET


LAY- FLAT HOSE

FULL OVERLAY GLASS DOOR WITH RADIAL FRAME, RECESSED HANDLE, FIRE EXTINGUISHER SECTION



► SE2-2311.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

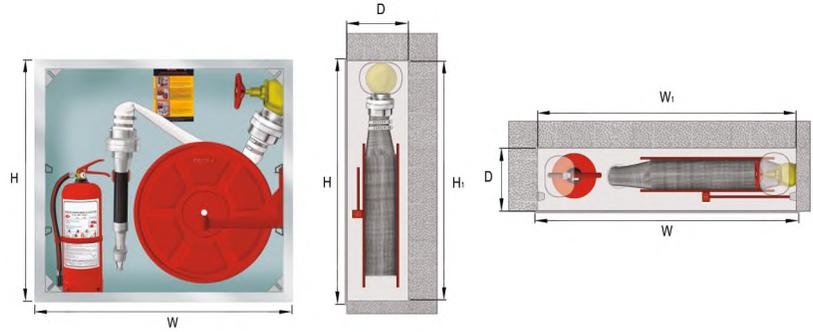

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-2311.1	Recessed	Full Overlay Metal Sheet Door, Recessed Handle	2" - 20 m	1 Tube / 6 kg	Optional	750	700	200	710	660
SE2-2311.3	Recessed	Full Overlay Metal Sheet Door, Recessed Handle	2" - 30 m	1 Tube / 6 kg	Optional	750	700	200	710	660
SE2-2321.1	Surface	Full Overlay Metal Sheet Door, Recessed Handle	2" - 20 m	1 Tube / 6 kg	Optional	750	700	200	750	700
SE2-2321.3	Surface	Full Overlay Metal Sheet Door, Recessed Handle	2" - 30 m	1 Tube / 6 kg	Optional	750	700	200	750	700

► CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable.

► HOSE REEL

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" lat flay fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► CABINET DOOR

- Inset metal sheet door, recessed handle
- Laser cut warning signs on the surface.
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.

FIRE CABINET


LAY- FLAT HOSE

FULL OVERLAY METAL SHEET DOOR, CHROME PLATED HANDLE, FIRE EXTINGUISHER SECTION



► SE2-2312.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

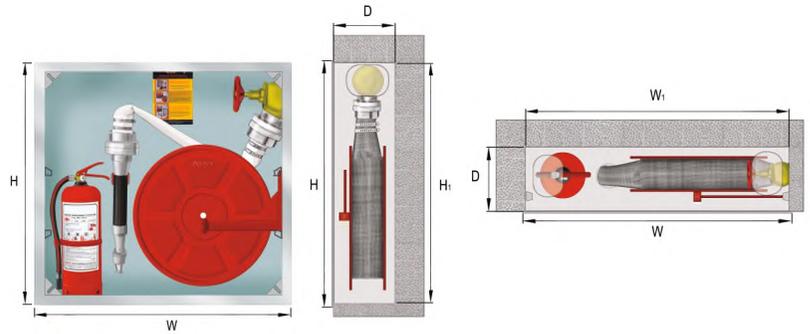

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-2312.1	Recessed	Full Overlay Metal Sheet Door, Chrome Plated Handle	2" - 20 m	1 Tube / 6 kg	Optional	750	700	200	710	660
SE2-2312.3	Recessed	Full Overlay Metal Sheet Door, Chrome Plated Handle	2" - 30 m	1 Tube / 6 kg	Optional	750	700	200	710	660
SE2-2322.1	Surface	Full Overlay Metal Sheet Door, Chrome Plated Handle	2" - 20 m	1 Tube / 6 kg	Optional	750	700	200	750	700
SE2-2322.3	Surface	Full Overlay Metal Sheet Door, Chrome Plated Handle	2" - 30 m	1 Tube / 6 kg	Optional	750	700	200	750	700

► **CABINET HOUSING**

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable.

► **HOSE REEL**

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► **CABINET DOOR**

- Full overlay metal sheet door, chrome plated handle.
- Laser cut warning signs on the surface.
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.

FIRE CABINET


LAY- FLAT HOSE

INSET METAL SHEET DOOR, FIRE EXTINGUISHER SECTION



► SE2-2313.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

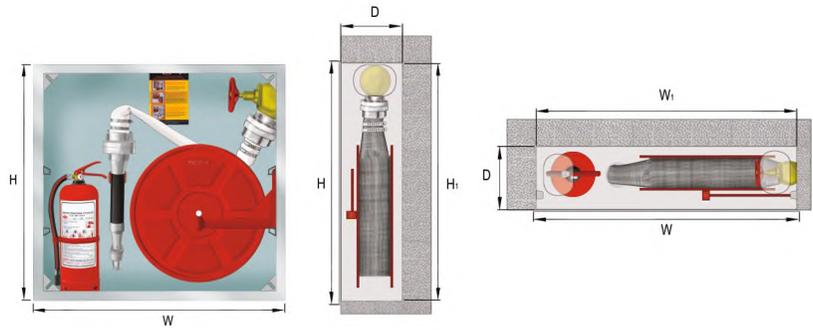

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-2313.1	Recessed	Inset Metal Sheet Door	2" - 20 m	1 Tube / 6 kg	Optional	750	700	200	710	660
SE2-2313.3	Recessed	Inset Metal Sheet Door	2" - 30 m	1 Tube / 6 kg	Optional	750	700	200	710	660
SE2-2323.1	Surface	Inset Metal Sheet Door	2" - 20 m	1 Tube / 6 kg	Optional	750	700	200	750	700
SE2-2323.3	Surface	Inset Metal Sheet Door	2" - 30 m	1 Tube / 6 kg	Optional	750	700	200	750	700

► CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable.

► HOSE REEL

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" lat flay fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► CABINET DOOR

- Inset metal sheet door with radial frame, chrome plated handle
- Relief warning signs on the surface.
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with continuous hinges, optionally stainless hinges or invisible hinges obtainable.

FIRE CABINET


LAY – FLAT HOSE

INSET GLASS DOOR, FIRE EXTINGUISHER SECTION



► SE2-2314.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors

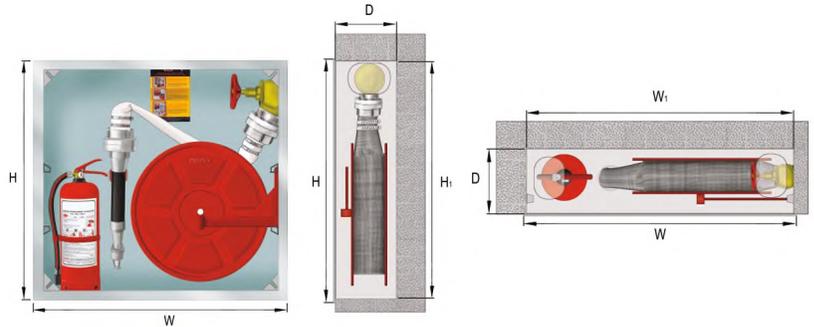

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-2314.1	Recessed	Inset Glass Door	2" - 20 m	1 Tube / 6 kg	Optional	750	700	200	710	660
SE2-2314.3	Recessed	Inset Glass Door	2" - 30 m	1 Tube / 6 kg	Optional	750	700	200	710	660
SE2-2324.1	Surface	Inset Glass Door	2" - 20 m	1 Tube / 6 kg	Optional	750	700	200	750	700
SE2-2324.3	Surface	Inset Glass Door	2" - 30 m	1 Tube / 6 kg	Optional	750	700	200	750	700

► **CABINET HOUSING**

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable.

► **HOSE REEL**

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.


► **CABINET DOOR**

- Inset glass door with radial frame, chrome plated handle
- 4 mm thick tempered smoke glass
- Screen printed warning signs are fired at 700°C
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with continuous hinges, optionally stainless hinges or invisible hinges obtainable.

FIRE CABINET


LAY – FLAT HOSE

FULL OVERLAY GLASS DOOR, FIRE EXTINGUISHER SECTION

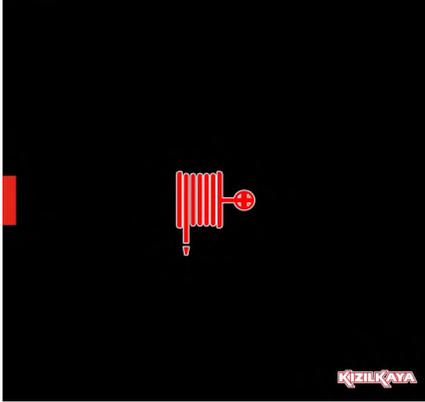

► SE2-2315.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

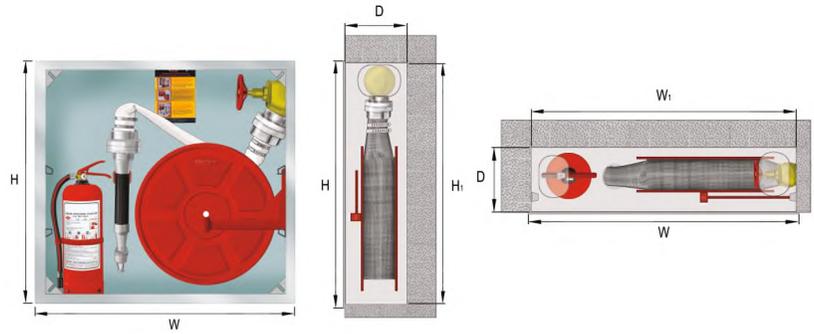

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-2315.1	Recessed	Full Overlay Glass Door	2" - 20 m	1 Tube / 6 kg	Optional	750	700	200	710	660
SE2-2315.3	Recessed	Full Overlay Glass Door	2" - 30 m	1 Tube / 6 kg	Optional	750	700	200	710	660
SE2-2325.1	Surface	Full Overlay Glass Door	2" - 20 m	1 Tube / 6 kg	Optional	750	700	200	750	700
SE2-2325.3	Surface	Full Overlay Glass Door	2" - 30 m	1 Tube / 6 kg	Optional	750	700	200	750	700

► CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable.

► HOSE REEL

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" lat flay fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► CABINET DOOR

- Full overlay glass door
- 4 mm thick tempered black glass
- Screen printed warning signs are fired at 700°C
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.

FIRE CABINET


LAY – FLAT HOSE

FULL OVERLAY GLASS DOOR WITH FRAME, CHROME PLATED HANDLE, WITH FIRE EXTINGUISHER SECTION



► SE2-2316.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

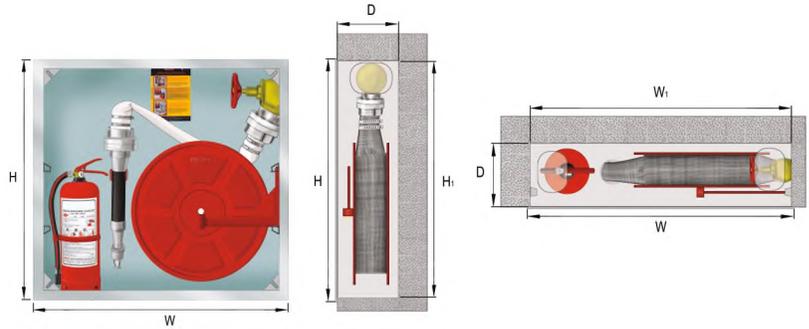

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-2316.1	Recessed	Full Overlay Glass Door with Frame, Chrome Plated Handle	2" - 20 m	1 Tube / 6 kg	Optional	750	700	200	710	660
SE2-2316.3	Recessed	Full Overlay Glass Door with Frame, Chrome Plated Handle	2" - 30 m	1 Tube / 6 kg	Optional	750	700	200	710	660
SE2-2326.1	Surface	Full Overlay Glass Door with Frame, Chrome Plated Handle	2" - 20 m	1 Tube / 6 kg	Optional	750	700	200	750	700
SE2-2326.3	Surface	Full Overlay Glass Door with Frame, Chrome Plated Handle	2" - 30 m	1 Tube / 6 kg	Optional	750	700	200	750	700

► **CABINET HOUSING**

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable.

► **HOSE REEL**

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" lat flay fire hose
- All connections are made with whipcheck safety cables instead of clamps.


► **CABINET DOOR**

- Full overlay glass door with frame, chrome plated handle
- 4 mm thick tempered smoke glass
- Screen printed warning signs are fired at 700°C
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.

FIRE CABINET


LAY – FLAT HOSE

FULL OVERLAY METAL SHEET DOOR, RECESSED HANDLE, HORIZONTAL FIRE EXTINGUISHER SECTION

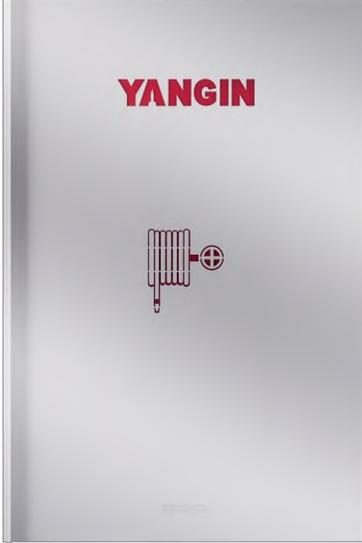

► SE2-2511.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

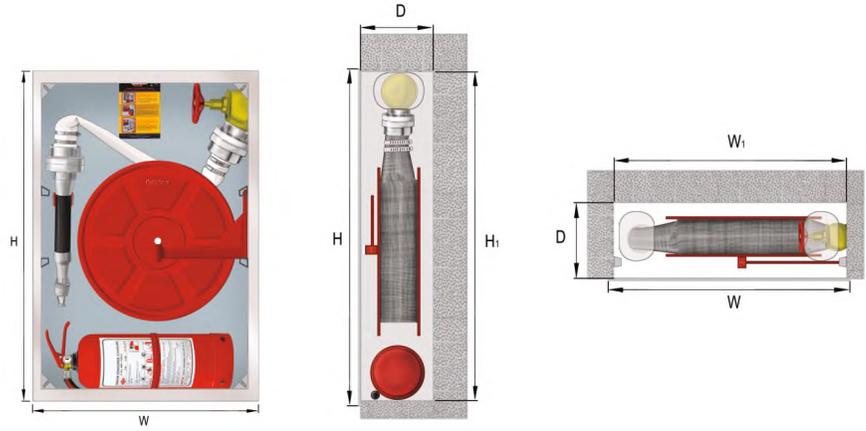

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-2511.1	Recessed	Full Overlay Metal Sheet Door, Recessed Handle	2" - 20 m	1 Tube / 6 kg	Optional	700	1000	200	660	960
SE2-2511.3	Recessed	Full Overlay Metal Sheet Door, Recessed Handle	2" - 30 m	1 Tube / 6 kg	Optional	700	1000	200	660	960
SE2-2521.1	Surface	Full Overlay Metal Sheet Door, Recessed Handle	2" - 20 m	1 Tube / 6 kg	Optional	700	1000	200	700	1000
SE2-2521.3	Surface	Full Overlay Metal Sheet Door, Recessed Handle	2" - 30 m	1 Tube / 6 kg	Optional	700	1000	200	700	1000

► CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable.

► HOSE REEL

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" lat flay fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► CABINET DOOR

- Full overlay metal sheet door, recessed handle
- Laser cut warning signs on the surface.
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.

FIRE CABINET


LAY – FLAT HOSE

FULL OVERLAY METAL SHEET DOOR, CHROME PLATED HANDLE, HORIZONTAL FIRE EXTINGUISHER SECTION



► SE2-2512.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

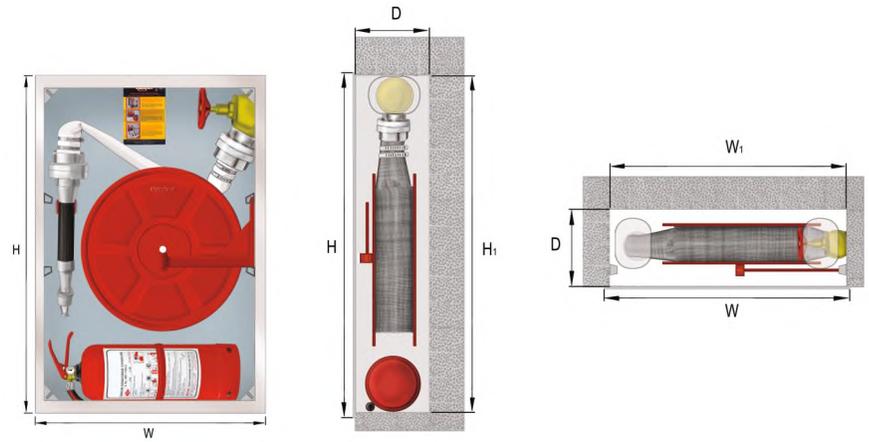

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-2512.1	Recessed	Full Overlay Metal Sheet Door, Chrome Plated Handle	2" - 20 m	1 Tube / 6 kg	Optional	700	1000	200	660	960
SE2-2512.3	Recessed	Full Overlay Metal Sheet Door, Chrome Plated Handle	2" - 30 m	1 Tube / 6 kg	Optional	700	1000	200	660	960
SE2-2522.1	Surface	Full Overlay Metal Sheet Door, Chrome Plated Handle	2" - 20 m	1 Tube / 6 kg	Optional	700	1000	200	700	1000
SE2-2522.3	Surface	Full Overlay Metal Sheet Door, Chrome Plated Handle	2" - 30 m	1 Tube / 6 kg	Optional	700	1000	200	700	1000

► **CABINET HOUSING**

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable.

► **HOSE REEL**

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► **CABINET DOOR**

- Full overlay metal sheet door, chrome plated handle
- Laser cut warning signs on the surface.
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.

FIRE CABINET


LAY – FLAT HOSE

INSET METAL SHEET DOOR, HORIZONTAL FIRE EXTINGUISHER SECTION



► SE2-2513.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

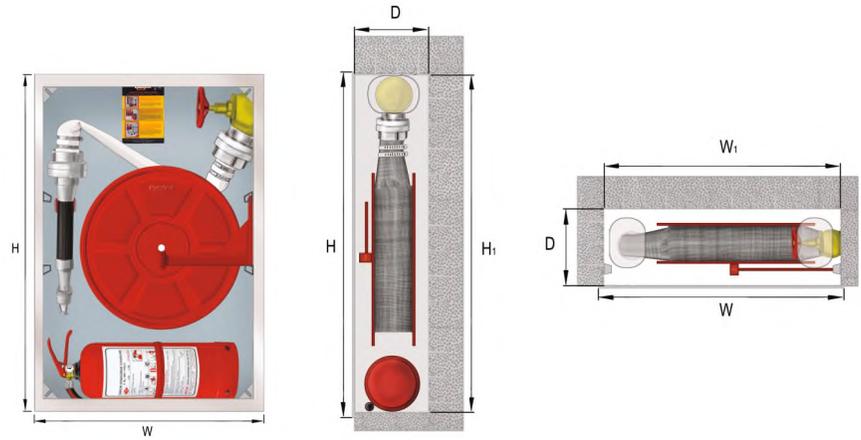

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-2513.1	Recessed	Inset Metal Sheet Door	2" - 20 m	1 Tube / 6 kg	Optional	700	1000	200	660	960
SE2-2513.3	Recessed	Inset Metal Sheet Door	2" - 30 m	1 Tube / 6 kg	Optional	700	1000	200	660	960
SE2-2523.1	Surface	Inset Metal Sheet Door	2" - 20 m	1 Tube / 6 kg	Optional	700	1000	200	700	1000
SE2-2523.3	Surface	Inset Metal Sheet Door	2" - 30 m	1 Tube / 6 kg	Optional	700	1000	200	700	1000

► CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable.

► HOSE REEL

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" lat flay fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► CABINET DOOR

- Inset metal sheet door with radial frame, chrome plated handle
- Relief warning signs on the surface.
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with continuous hinges, optionally stainless hinges or invisible hinges obtainable.

FIRE CABINET


LAY – FLAT HOSE

INSET GLASS DOOR, HORIZONTAL FIRE EXTINGUISHER SECTION



▶ SE2-2514.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

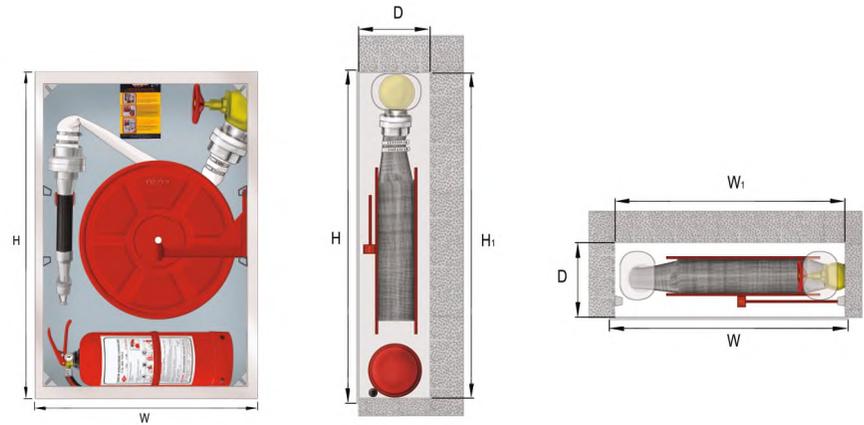

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-2514.1	Recessed	Inset Glass Door	2" - 20 m	1 Tube / 6 kg	Optional	700	1000	200	660	960
SE2-2514.3	Recessed	Inset Glass Door	2" - 30 m	1 Tube / 6 kg	Optional	700	1000	200	660	960
SE2-2524.1	Surface	Inset Glass Door	2" - 20 m	1 Tube / 6 kg	Optional	700	1000	200	700	1000
SE2-2524.3	Surface	Inset Glass Door	2" - 30 m	1 Tube / 6 kg	Optional	700	1000	200	700	1000

▶ **CABINET HOUSING**

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable.

▶ **HOSE REEL**

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" lat flay fire hose
- All connections are made with whipcheck safety cables instead of clamps.


▶ **CABINET DOOR**

- Inset glass door with radial frame chrome plated handle
- 4 mm thick tempered smoke glass
- Screen printed warning signs are fired at 700°C
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with continuous hinges, optionally stainless hinges or invisible hinges obtainable.

FIRE CABINET


LAY – FLAT HOSE

FULL OVERLAY GLASS DOOR, HORIZONTAL FIRE EXTINGUISHER SECTION

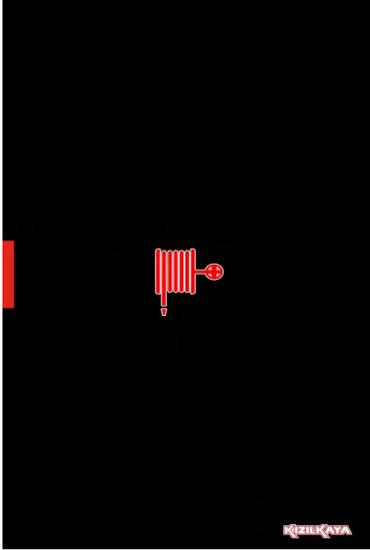

► SE2-2515.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

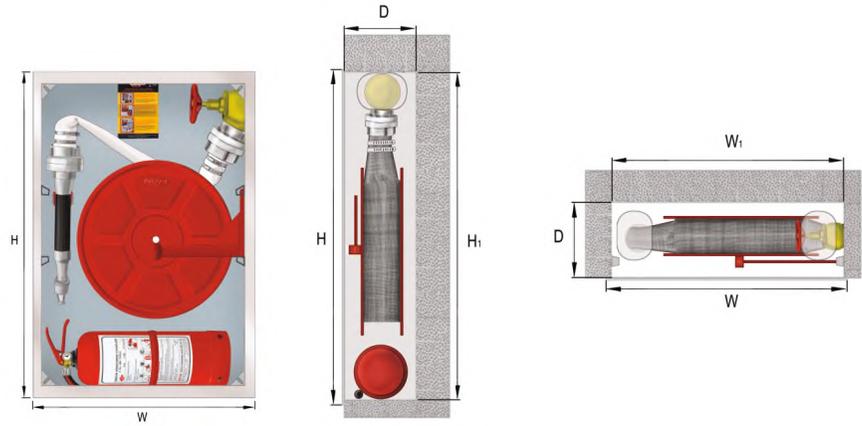

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W _i mm	H _i mm
SE2-2515.1	Recessed	Full Overlay Glass Door	2" - 20 m	1 Tube / 6 kg	Optional	700	1000	200	660	960
SE2-2515.3	Recessed	Full Overlay Glass Door	2" - 30 m	1 Tube / 6 kg	Optional	700	1000	200	660	960
SE2-2525.1	Surface	Full Overlay Glass Door	2" - 20 m	1 Tube / 6 kg	Optional	700	1000	200	700	1000
SE2-2525.3	Surface	Full Overlay Glass Door	2" - 30 m	1 Tube / 6 kg	Optional	700	1000	200	700	1000

► CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable.

► HOSE REEL

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► CABINET DOOR

- Full overlay glass door
- 4 mm thick tempered black glass
- Screen printed warning signs are fired at 700°C
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.

FIRE CABINET


LAY – FLAT HOSE

FULL OVERLAY GLASS DOOR WITH FRAME, CHROME PLATED HANDLE, HORIZONTAL FIRE EXTINGUISHER SECTION



▶ SE2-2516.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

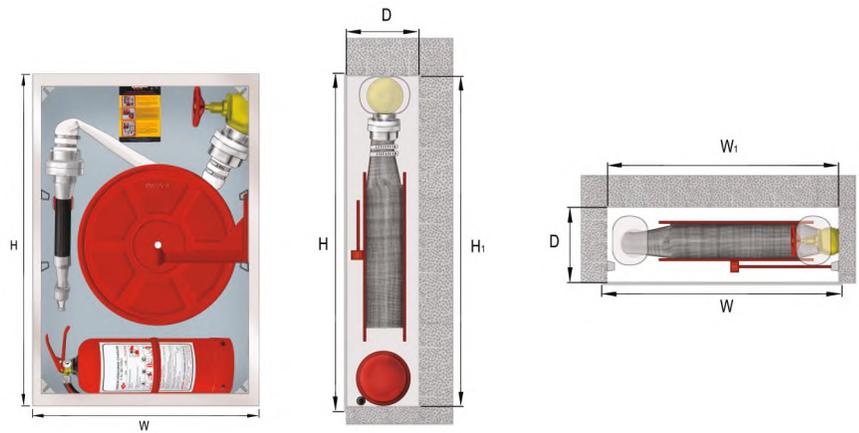

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-2516.1	Recessed	Full Overlay Glass Door With Frame, Chrome Plated Handle	2" - 20 m	1 Tube / 6 kg	Optional	700	1000	200	660	960
SE2-2516.3	Recessed	Full Overlay Glass Door With Frame, Chrome Plated Handle	2" - 30 m	1 Tube / 6 kg	Optional	700	1000	200	660	960
SE2-2526.1	Surface	Full Overlay Glass Door With Frame, Chrome Plated Handle	2" - 20 m	1 Tube / 6 kg	Optional	700	1000	200	700	1000
SE2-2526.3	Surface	Full Overlay Glass Door With Frame, Chrome Plated Handle	2" - 30 m	1 Tube / 6 kg	Optional	700	1000	200	700	1000

▶ **CABINET HOUSING**

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable.

▶ **HOSE REEL**

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" lat flay fire hose
- All connections are made with whipcheck safety cables instead of clamps.


▶ **CABINET DOOR**

- Full overlay glass door with frame, chrome plated handle
- 4 mm thick tempered smoke glass
- Screen printed warning signs are fired at 700°C
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.

FIRE CABINET


LAY – FLAT HOSE

FULL OVERLAY DOUBLE METAL SHEET DOOR, RECESSED HANDLE, FIRE EXTINGUISHER SECTION

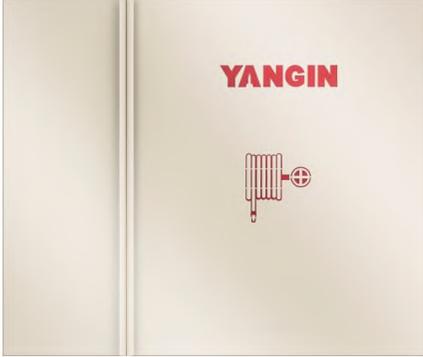

► SE2-2411.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

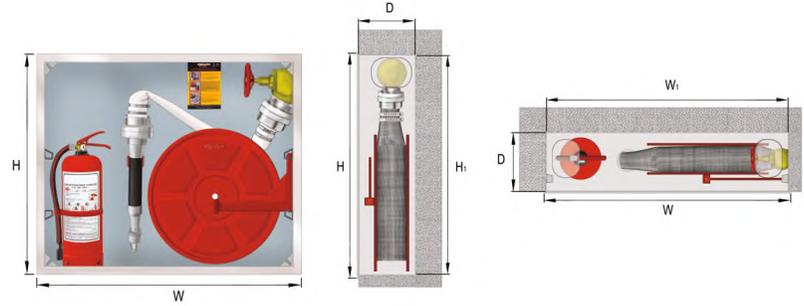

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-2411.1	Recessed	Full Overlay Double Metal Sheet Door, Recessed Handle	2" - 20 m	1 Tube / 6 kg	Optional	860	700	200	820	660
SE2-2411.3	Recessed	Full Overlay Double Metal Sheet Door, Recessed Handle	2" - 30 m	1 Tube / 6 kg	Optional	860	700	200	820	660
SE2-2421.1	Surface	Full Overlay Double Metal Sheet Door, Recessed Handle	2" - 20 m	1 Tube / 6 kg	Optional	860	700	200	860	700
SE2-2421.3	Surface	Full Overlay Double Metal Sheet Door, Recessed Handle	2" - 30 m	1 Tube / 6 kg	Optional	860	700	200	860	700

► CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable.

► HOSE REEL

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► CABINET DOOR

- Full overlay metal sheet door, recessed handle
- Laser cut warning signs on the surface.
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.

FIRE CABINET


LAY – FLAT HOSE

FULL OVERLAY DOUBLE METAL SHEET DOOR, CHROME PLATED HANDLE, FIRE EXTINGUISHER SECTION



▶ SE2-2412.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

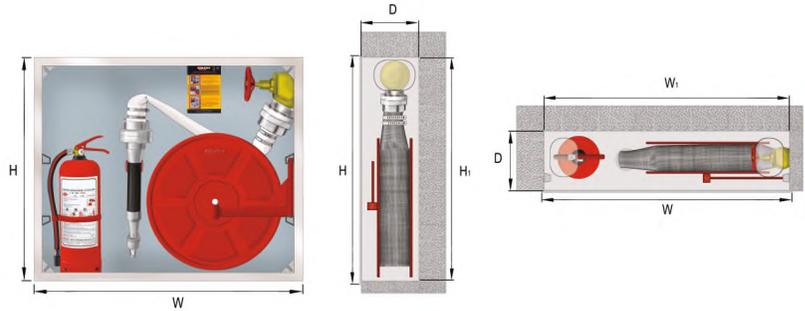

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W	H	D	W ₁	H ₁
						mm	mm	mm	mm	mm
SE2-2412.1	Recessed	Full Overlay Double Metal Sheet Door, Chrome Plated Handle	2" - 20 m	1 Tube / 6 kg	Optional	860	700	200	820	660
SE2-2412.3	Recessed	Full Overlay Double Metal Sheet Door, Chrome Plated Handle	2" - 30 m	1 Tube / 6 kg	Optional	860	700	200	820	660
SE2-2422.1	Surface	Full Overlay Double Metal Sheet Door, Chrome Plated Handle	2" - 20 m	1 Tube / 6 kg	Optional	860	700	200	860	700
SE2-2422.3	Surface	Full Overlay Double Metal Sheet Door, Chrome Plated Handle	2" - 30 m	1 Tube / 6 kg	Optional	860	700	200	860	700

▶ **CABINET HOUSING**

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable.

▶ **HOSE REEL**

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.

▶ **CABINET DOOR**

- Inset metal sheet door, chrome plated handle
- Laser cut warning signs on the surface.
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.

FIRE CABINET


LAY – FLAT HOSE

INSET DOUBLE METAL SHEET DOOR, FIRE EXTINGUISHER SECTION



► SE2-2413.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

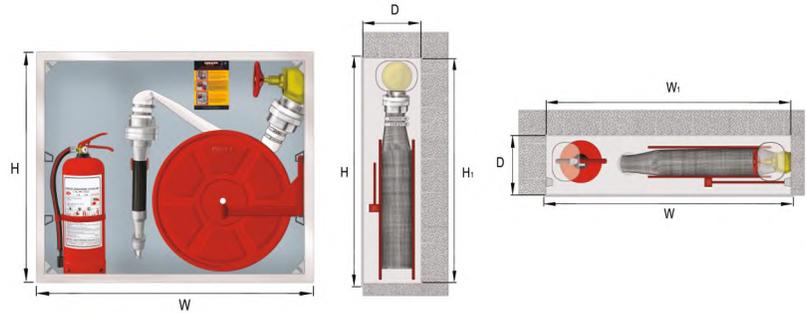

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-2413.1	Recessed	Inset Double Metal Sheet Door	2" - 20 m	1 Tube / 6 kg	Optional	860	700	200	820	660
SE2-2413.3	Recessed	Inset Double Metal Sheet Door	2" - 30 m	1 Tube / 6 kg	Optional	860	700	200	820	660
SE2-2423.1	Surface	Inset Double Metal Sheet Door	2" - 20 m	1 Tube / 6 kg	Optional	860	700	200	860	700
SE2-2423.3	Surface	Inset Double Metal Sheet Door	2" - 30 m	1 Tube / 6 kg	Optional	860	700	200	860	700

► CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable.

► HOSE REEL

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" lat flay fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► CABINET DOOR

- Inset metal sheet door, with radial frame, chrome plated handle
- Relief warning signs on the surface.
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with continuous hinges, optionally stainless hinges or invisible hinges obtainable.

FIRE CABINET


LAY – FLAT HOSE

INSET DOUBLE GLASS DOOR, FIRE EXTINGUISHER SECTION



► SE2-2414.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

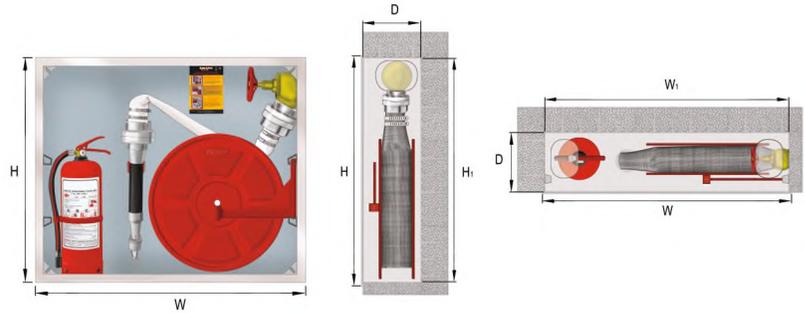

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-2414.1	Recessed	Inset Double Glass Door	2" - 20 m	1 Tube / 6 kg	Optional	860	700	200	820	660
SE2-2414.3	Recessed	Inset Double Glass Door	2" - 30 m	1 Tube / 6 kg	Optional	860	700	200	820	660
SE2-2424.1	Surface	Inset Double Glass Door	2" - 20 m	1 Tube / 6 kg	Optional	860	700	200	860	700
SE2-2424.3	Surface	Inset Double Glass Door	2" - 30 m	1 Tube / 6 kg	Optional	860	700	200	860	700

► **CABINET HOUSING**

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable.

► **HOSE REEL**

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.


► **CABINET DOOR**

- Inset glass door with radial frame, chrome plated handle
- 4 mm thick tempered smoke glass
- Screen printed warning signs are fired at 700°C
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with continuous hinges, optionally stainless hinges or invisible hinges obtainable.

FIRE CABINET


LAY – FLAT HOSE

FULL OVERLAY GLASS DOOR, FIRE EXTINGUISHER SECTION

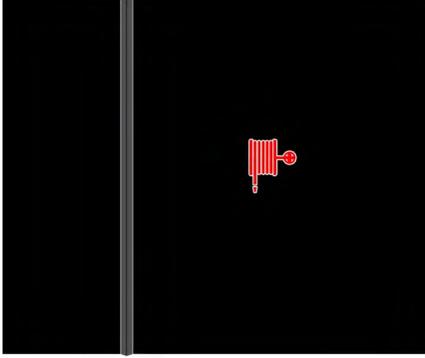

► SE2-2415.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

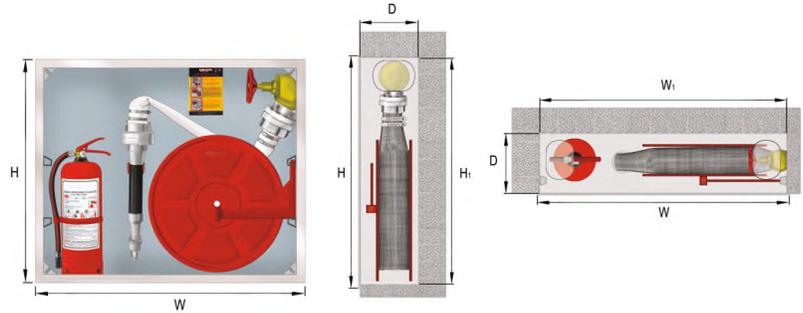

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-2415.1	Recessed	Full Overlay Double Glass Door	2" - 20 m	1 Tube / 6 kg	Optional	860	700	200	820	660
SE2-2415.3	Recessed	Full Overlay Double Glass Door	2" - 30 m	1 Tube / 6 kg	Optional	860	700	200	820	660
SE2-2425.1	Surface	Full Overlay Double Glass Door	2" - 20 m	1 Tube / 6 kg	Optional	860	700	200	860	700
SE2-2425.3	Surface	Full Overlay Double Glass Door	2" - 30 m	1 Tube / 6 kg	Optional	860	700	200	860	700

► CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable.

► HOSE REEL

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► CABINET DOOR

- Full overlay glass door
- 4 mm thick tempered black glass
- Screen printed warning signs are fired at 700°C
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.

FIRE CABINET


LAY – FLAT HOSE

FULL OVERLAY DOUBLE GLASS DOOR WITH FRAME, CHROME PLATED HANDLE, FIRE EXTINGUISHER SECTION



► SE2-2416.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

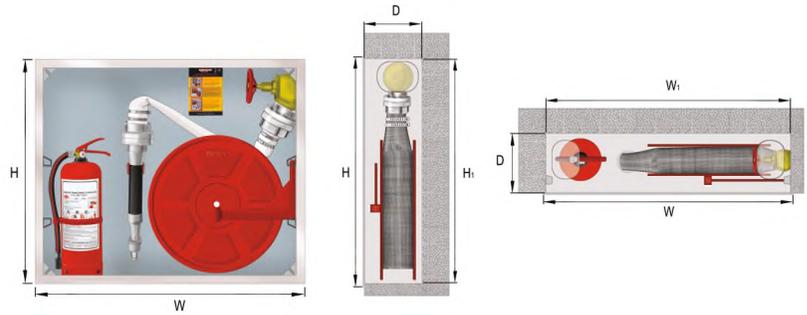

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W	H	D	W ₁	H ₁
						mm	mm	mm	mm	mm
SE2-2416.1	Recessed	Full Overlay Double Glass Door With Frame, Chrome Plated Handle	2" - 20 m	1 Tube / 6 kg	Optional	860	700	200	820	660
SE2-2416.3	Recessed	Full Overlay Double Glass Door With Frame, Chrome Plated Handle	2" - 30 m	1 Tube / 6 kg	Optional	860	700	200	820	660
SE2-2426.1	Surface	Full Overlay Double Glass Door With Frame, Chrome Plated Handle	2" - 20 m	1 Tube / 6 kg	Optional	860	700	200	860	700
SE2-2426.3	Surface	Full Overlay Double Glass Door With Frame, Chrome Plated Handle	2" - 30 m	1 Tube / 6 kg	Optional	860	700	200	860	700

► **CABINET HOUSING**

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable.

► **HOSE REEL**

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► **CABINET DOOR**

- Full overlay glass door with frame, chrome plated handle
- 4 mm thick tempered smoke glass
- Screen printed warning signs are fired at 700°C
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.

FIRE CABINET


LAY – FLAT HOSE

FULL OVERLAY METAL SHEET DOOR, RECESSED HANDLE, HORIZONTAL FIRE EXTINGUISHER SECTION FOR 2 TUBES



► SE2-2611.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

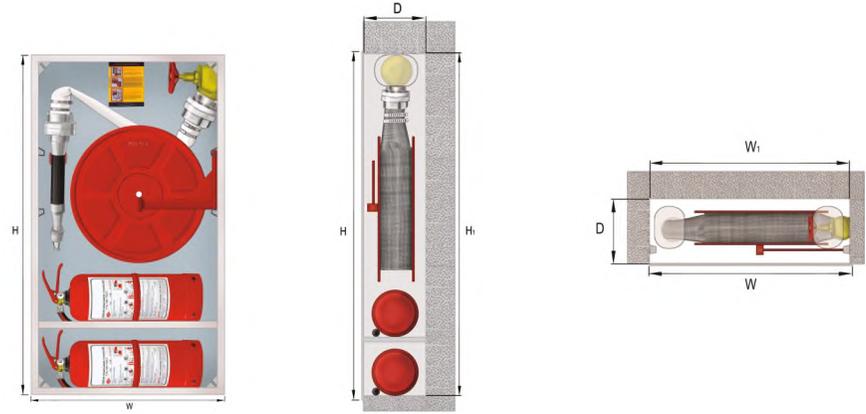

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-2611.1	Recessed	Full Overlay Metal Sheet Door, Recessed Handle	2" - 20 m	2 Tube / 6 kg	Optional	700	1100	200	660	1060
SE2-2611.3	Recessed	Full Overlay Metal Sheet Door, Recessed Handle	2" - 30 m	2 Tube / 6 kg	Optional	700	1100	200	660	1060
SE2-2621.1	Surface	Full Overlay Metal Sheet Door, Recessed Handle	2" - 20 m	2 Tube / 6 kg	Optional	700	1100	200	700	1100
SE2-2621.3	Surface	Full Overlay Metal Sheet Door, Recessed Handle	2" - 30 m	2 Tube / 6 kg	Optional	700	1100	200	700	1100

► CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable

► HOSE REEL

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► CABINET DOOR

- Full overlay metal sheet door, recessed handle
- Laser cut warning signs on the surface.
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.

FIRE CABINET


LAY – FLAT HOSE

FULL OVERLAY METAL SHEET DOOR, CHROME PLATED HANDLE, HORIZONTAL FIRE EXTINGUISHER SECTION FOR 2 TUBES



▶ SE2-2612.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

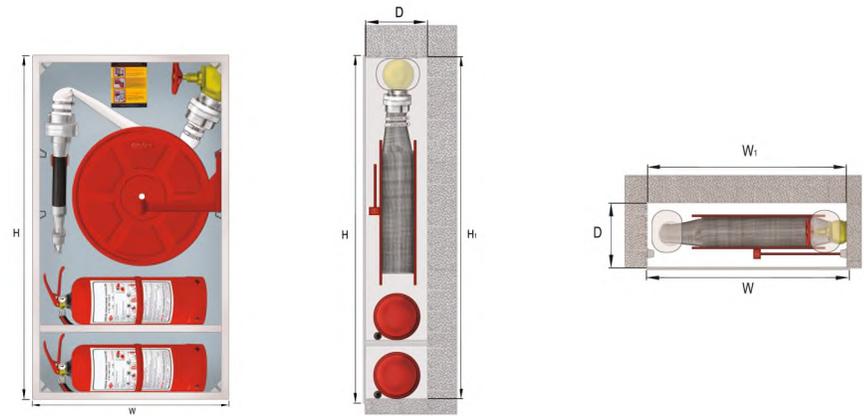

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-2612.1	Recessed	Full Overlay Metal Sheet Door, Chrome Plated Handle	2" - 20 m	2 Tube / 6 kg	Optional	700	1100	200	660	1060
SE2-2612.3	Recessed	Full Overlay Metal Sheet Door, Chrome Plated Handle	2" - 30 m	2 Tube / 6 kg	Optional	700	1100	200	660	1060
SE2-2622.1	Surface	Full Overlay Metal Sheet Door, Chrome Plated Handle	2" - 20 m	2 Tube / 6 kg	Optional	700	1100	200	700	1100
SE2-2622.3	Surface	Full Overlay Metal Sheet Door, Chrome Plated Handle	2" - 30 m	2 Tube / 6 kg	Optional	700	1100	200	700	1100

▶ **CABINET HOUSING**

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable.

▶ **HOSE REEL**

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps

▶ **CABINET DOOR**

- Inset metal sheet door chrome plated handle
- Laser cut warning signs on the surface.
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.

FIRE CABINET


LAY – FLAT HOSE

INSET METAL SHEET DOOR, HORIZONTAL FIRE EXTINGUISHER SECTION FOR 2 TUBES



► SE2-2613.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

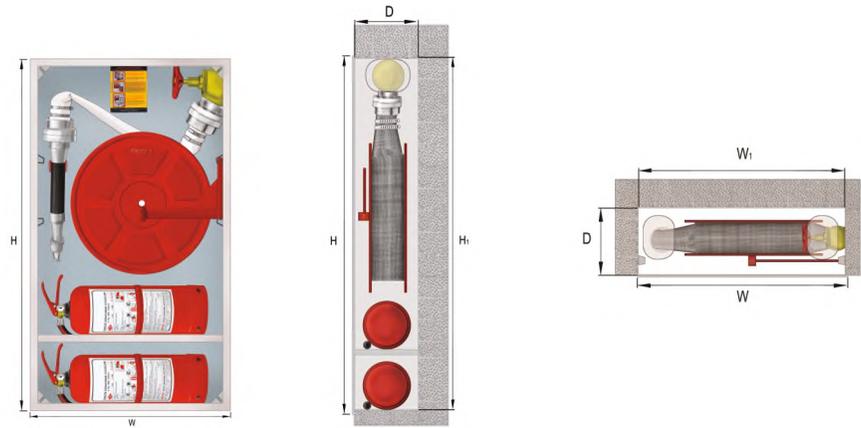

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-2613.1	Recessed	Inset Metal Sheet Door	2" - 20 m	2 Tube / 6 kg	Optional	700	1100	200	660	1060
SE2-2613.3	Recessed	Inset Metal Sheet Door	2" - 30 m	2 Tube / 6 kg	Optional	700	1100	200	660	1060
SE2-2623.1	Surface	Inset Metal Sheet Door	2" - 20 m	2 Tube / 6 kg	Optional	700	1100	200	700	1100
SE2-2623.3	Surface	Inset Metal Sheet Door	2" - 30 m	2 Tube / 6 kg	Optional	700	1100	200	700	1100

► CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable

► HOSE REEL

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" lat flay fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► CABINET DOOR

- Inset metal sheet door with radial frame, chrome plated handle
- Relief warning signs on the surface.
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with continuous hinges, optionally stainless hinges or invisible hinges obtainable.

FIRE CABINET


LAY – FLAT HOSE

INSET GLASS DOOR, HORIZONTAL FIRE EXTINGUISHER SECTION FOR 2 TUBES



► SE2-2614.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

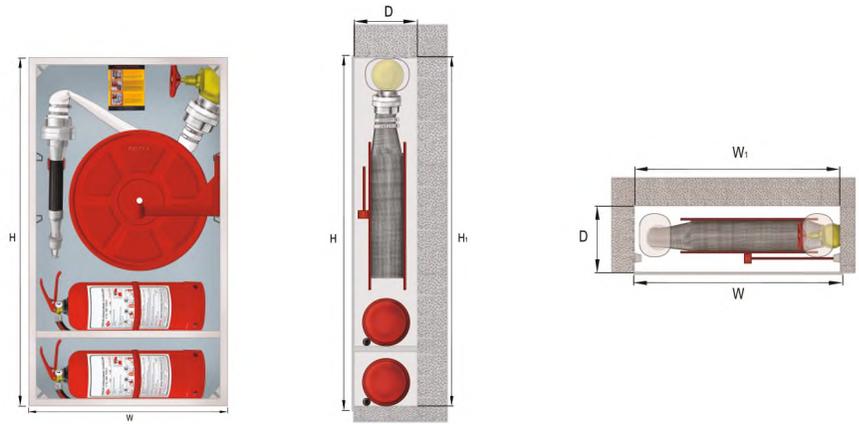

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-2614.1	Recessed	Inset Glass Door	2" - 20 m	2 Tube / 6 kg	Optional	700	1100	200	660	1060
SE2-2614.3	Recessed	Inset Glass Door	2" - 30 m	2 Tube / 6 kg	Optional	700	1100	200	660	1060
SE2-2624.1	Surface	Inset Glass Door	2" - 20 m	2 Tube / 6 kg	Optional	700	1100	200	700	1100
SE2-2624.3	Surface	Inset Glass Door	2" - 30 m	2 Tube / 6 kg	Optional	700	1100	200	700	1100

► **CABINET HOUSING**

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable

► **HOSE REEL**

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.


► **CABINET DOOR**

- Inset glass door with radial frame, chrome plated handle
- 4 mm thick tempered smoke glass
- Screen printed warning signs are fired at 700°C
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with continuous hinges, optionally stainless hinges or invisible hinges obtainable

FIRE CABINET


LAY – FLAT HOSE

FULL OVERLAY GLASS DOOR, HORIZONTAL FIRE EXTINGUISHER SECTION FOR 2 TUBES

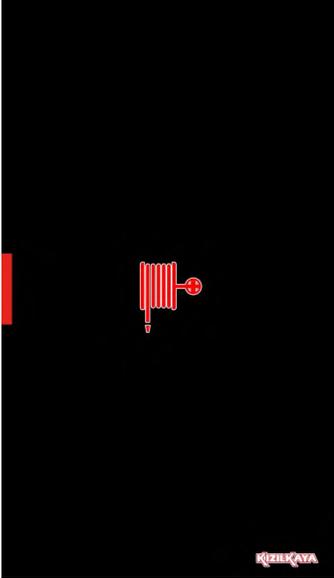

► SE2-2615.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

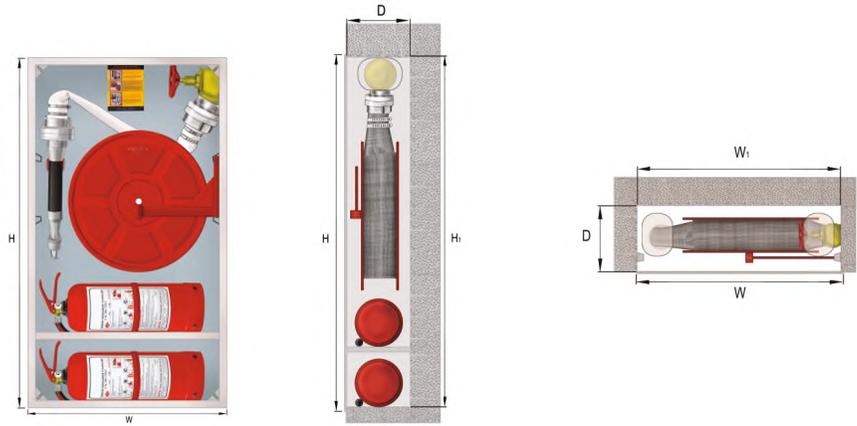

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-2615.1	Recessed	Full Overlay Glass Door	2" - 20 m	2 Tube / 6 kg	Optional	700	1100	200	660	1060
SE2-2615.3	Recessed	Full Overlay Glass Door	2" - 30 m	2 Tube / 6 kg	Optional	700	1100	200	660	1060
SE2-2625.1	Surface	Full Overlay Glass Door	2" - 20 m	2 Tube / 6 kg	Optional	700	1100	200	700	1100
SE2-2625.3	Surface	Full Overlay Glass Door	2" - 30 m	2 Tube / 6 kg	Optional	700	1100	200	700	1100

► CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable

► HOSE REEL

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" lat flay fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► CABINET DOOR

- Full overlay glass door
- 4 mm thick tempered black glass
- Screen printed warning signs are fired at 700°C
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.

FIRE CABINET


LAY – FLAT HOSE

FULL OVERLAY GLASS DOOR WITH FRAME, CHROME PLATED HANDLE, HORIZONTAL FIRE EXTINGUISHER SECTION FOR 2 TUBES



▶ SE2-2616.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

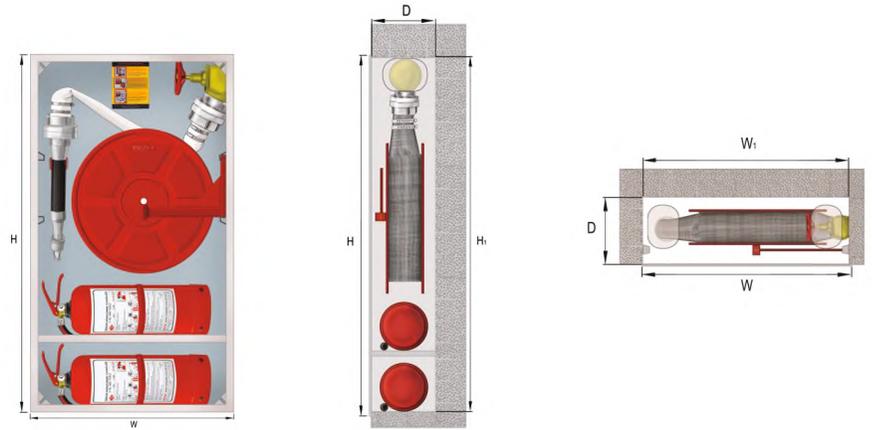

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-2616.1	Recessed	Full Overlay Glass Door With Frame, Chrome Plated Handle	2" - 20 m	2 Tube / 6 kg	Optional	700	1100	200	660	1060
SE2-2616.3	Recessed	Full Overlay Glass Door With Frame, Chrome Plated Handle	2" - 30 m	2 Tube / 6 kg	Optional	700	1100	200	660	1060
SE2-2626.1	Surface	Full Overlay Glass Door With Frame, Chrome Plated Handle	2" - 20 m	2 Tube / 6 kg	Optional	700	1100	200	700	1100
SE2-2626.3	Surface	Full Overlay Glass Door With Frame, Chrome Plated Handle	2" - 30 m	2 Tube / 6 kg	Optional	700	1100	200	700	1100

▶ **CABINET HOUSING**

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable

▶ **HOSE REEL**

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.

▶ **CABINET DOOR**

- Full overlay glass door with frame, chrome plated handle.
- 4 mm thick tempered smoke glass
- Screen printed warning signs are fired at 700°C
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges

FIRE CABINET


LAY – FLAT HOSE

FULL OVERLAY SINGLE METAL SHEET DOOR, RECESSED HANDLE, DOUBLE HOSE REEL



► SE2-2711.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

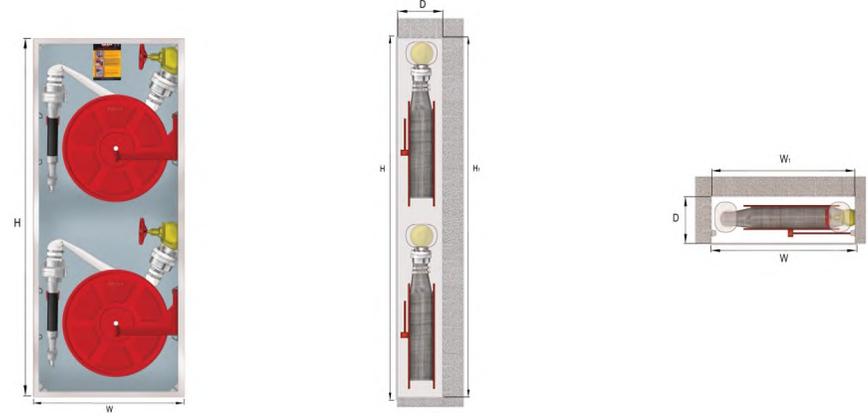

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-2711.1	Recessed	Full Overlay Metal Sheet Door, Recessed Handle	2" - 20 m	-	Optional	700	1400	200	660	1360
SE2-2711.3	Recessed	Full Overlay Metal Sheet Door, Recessed Handle	2" - 30 m	-	Optional	700	1400	200	660	1360
SE2-2721.1	Surface	Full Overlay Metal Sheet Door, Recessed Handle	2" - 20 m	-	Optional	700	1400	200	700	1400
SE2-2721.3	Surface	Full Overlay Metal Sheet Door, Recessed Handle	2" - 30 m	-	Optional	700	1400	200	700	1400

► CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable.

► HOSE REEL

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.


► CABINET DOOR

- Full overlay metal sheet door, recessed handle.
- Laser cut warning signs on the surface
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.

FIRE CABINET


LAY – FLAT HOSE

FULL OVERLAY METAL SHEET DOOR, CHROME PLATED HANDLE, DOUBLE HOSE REEL

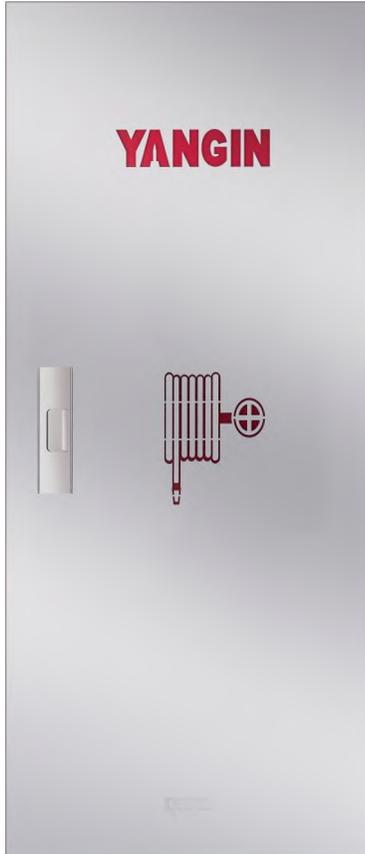

▶ SE2-2712.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

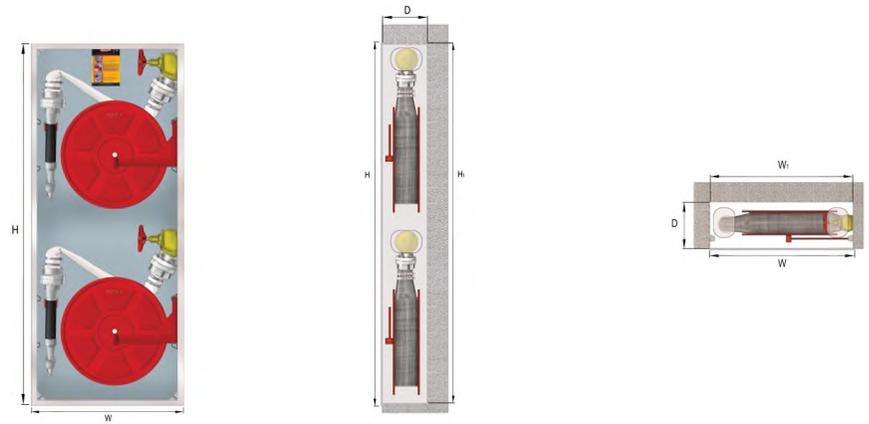

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W _i mm	H _i mm
SE2-2712.1	Recessed	Full Overlay Metal Sheet Door, Chrome Plated Handle	2" - 20 m	-	Optional	700	1400	200	660	1360
SE2-2712.3	Recessed	Full Overlay Metal Sheet Door, Chrome Plated Handle	2" - 30 m	-	Optional	700	1400	200	660	1360
SE2-2722.1	Surface	Full Overlay Metal Sheet Door, Chrome Plated Handle	2" - 20 m	-	Optional	700	1400	200	700	1400
SE2-2722.3	Surface	Full Overlay Metal Sheet Door, Chrome Plated Handle	2" - 30 m	-	Optional	700	1400	200	700	1400

▶ **CABINET HOUSING**

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable.

▶ **HOSE REEL**

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.

▶ **CABINET DOOR**

- Full overlay metal sheet door, chrome plated handle
- Laser cut warning signs on the surface
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.

FIRE CABINET


LAY – FLAT HOSE

SINGLE INSET METAL SHEET DOOR, DOUBLE HOSE REEL



► SE2-2713.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

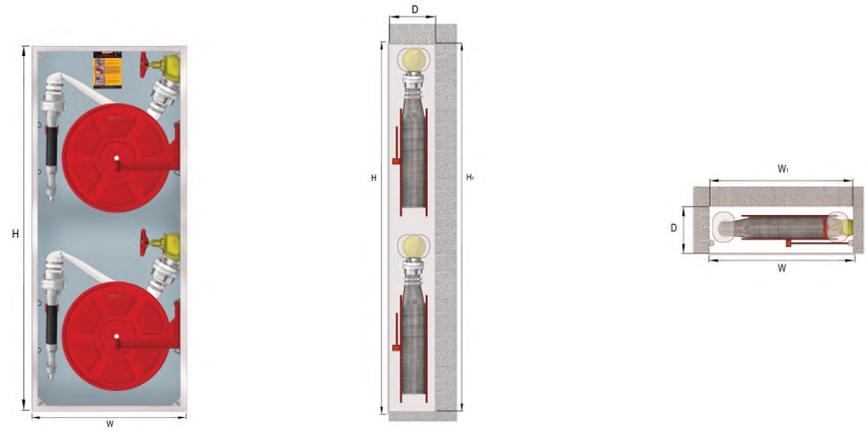

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-2713.1	Recessed	Inset Metal Sheet Door	2" - 20 m	-	Optional	700	1400	200	660	1360
SE2-2713.3	Recessed	Inset Metal Sheet Door	2" - 30 m	-	Optional	700	1400	200	660	1360
SE2-2723.1	Surface	Inset Metal Sheet Door	2" - 20 m	-	Optional	700	1400	200	700	1400
SE2-2723.3	Surface	Inset Metal Sheet Door	2" - 30 m	-	Optional	700	1400	200	700	1400

► CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable.

► HOSE REEL

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► CABINET DOOR

- Inset metal sheet door with radial frame, chrome plated handle
- Relief warning signs on the surface
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with continuous hinges, optionally stainless hinges or invisible hinges obtainable.

FIRE CABINET


LAY – FLAT HOSE

SINGLE INSET GLASS DOOR, DOUBLE HOSE REEL



▶ SE2-2714.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

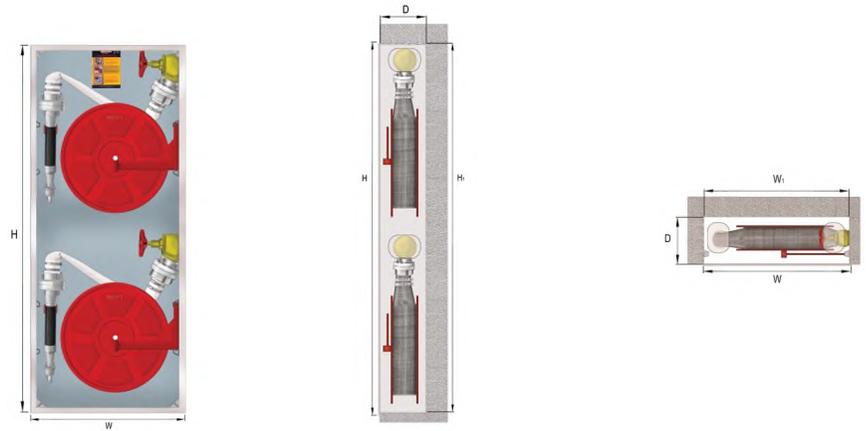

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W _i mm	H _i mm
SE2-2714.1	Recessed	Inset Glass Door	2" - 20 m	-	Optional	700	1400	200	660	1360
SE2-2714.3	Recessed	Inset Glass Door	2" - 30 m	-	Optional	700	1400	200	660	1360
SE2-2724.1	Surface	Inset Glass Door	2" - 20 m	-	Optional	700	1400	200	700	1400
SE2-2724.3	Surface	Inset Glass Door	2" - 30 m	-	Optional	700	1400	200	700	1400

▶ **CABINET HOUSING**

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable.

▶ **HOSE REEL**

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.


▶ **CABINET DOOR**

- Inset glass door with radial frame, chrome plated handle
- 4 mm thick tempered smoke glass
- Screen printed warning signs are fired at 700°C
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with continuous hinges, optionally stainless hinges or invisible hinges obtainable.

FIRE CABINET


LAY – FLAT HOSE

SINGLE FULL OVERLAY GLASS DOOR, DOUBLE HOSE REEL

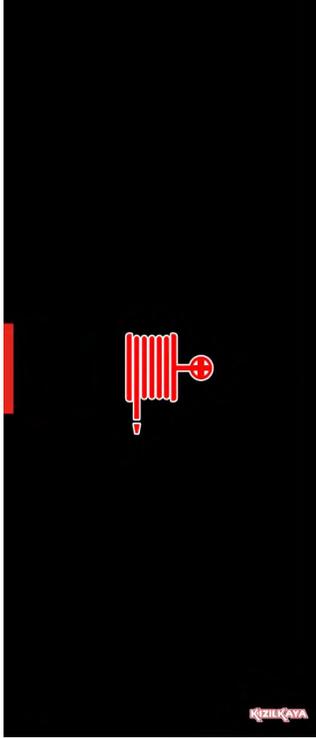

► SE2-2715.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

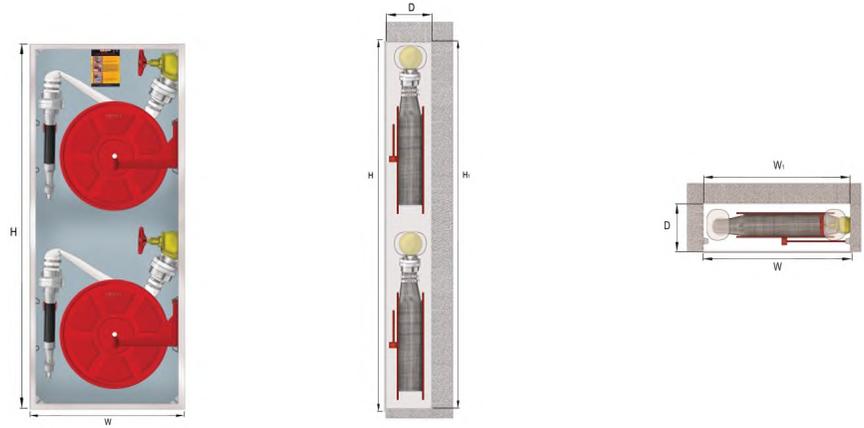

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W _i mm	H _i mm
SE2-2715.1	Recessed	Full Overlay Glass Door	2" - 20 m	-	Optional	700	1400	200	660	1360
SE2-2715.3	Recessed	Full Overlay Glass Door	2" - 30 m	-	Optional	700	1400	200	660	1360
SE2-2725.1	Surface	Full Overlay Glass Door	2" - 20 m	-	Optional	700	1400	200	700	1400
SE2-2725.3	Surface	Full Overlay Glass Door	2" - 30 m	-	Optional	700	1400	200	700	1400

► CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable.

► HOSE REEL

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" lat flay fire hose
- All connections are made with whipcheck safety cables instead of clamps.


► CABINET DOOR

- Full overlay glass door.
- 4 mm thick tempered black glass
- Screen printed warning signs are fired at 700°C
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.

FIRE CABINET


LAY – FLAT HOSE

SINGLE FULL OVERLAY GLASS DOOR WITH FRAME, CHROME PLATED HANDLE, DOUBLE HOSE REEL

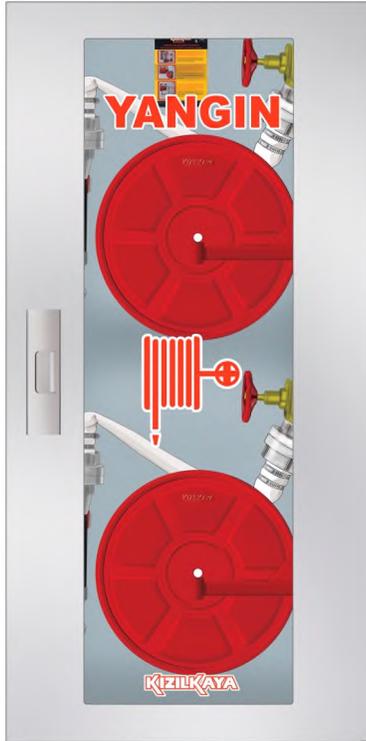

▶ SE2-2716.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

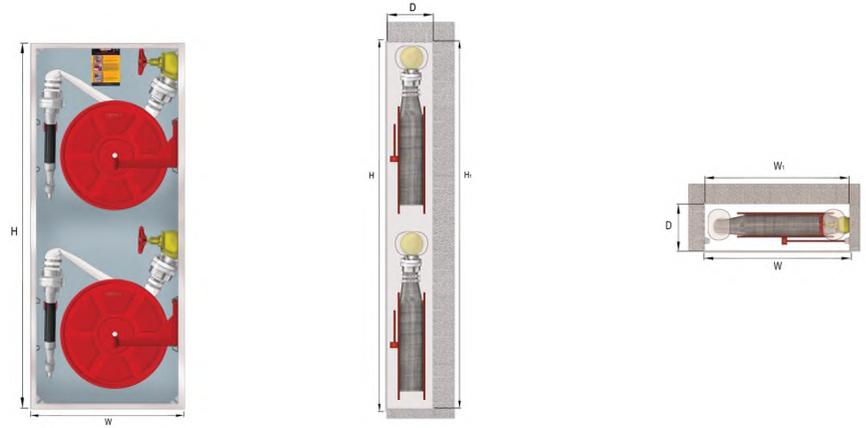

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-2716.1	Recessed	Full Overlay Glass Door, Chrome Plated Handle	2" - 20 m	-	Optional	700	1400	200	660	1360
SE2-2716.3	Recessed	Full Overlay Glass Door, Chrome Plated Handle	2" - 30 m	-	Optional	700	1400	200	660	1360
SE2-2726.1	Surface	Full Overlay Glass Door, Chrome Plated Handle	2" - 20 m	-	Optional	700	1400	200	700	1400
SE2-2726.3	Surface	Full Overlay Glass Door, Chrome Plated Handle	2" - 30 m	-	Optional	700	1400	200	700	1400

▶ **CABINET HOUSING**

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable.

▶ **HOSE REEL**

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.

▶ **CABINET DOOR**

- Full overlay glass door with frame, chrome plated handle
- 4 mm thick tempered smoke glass
- Screen printed warning signs are fired at 700°C
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.

FIRE CABINET


LAY – FLAT HOSE

DOUBLE FULL OVERLAY METAL SHEET DOOR, RECESSED HANDLE, DOUBLE HOSE REEL



► SE2-2811.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

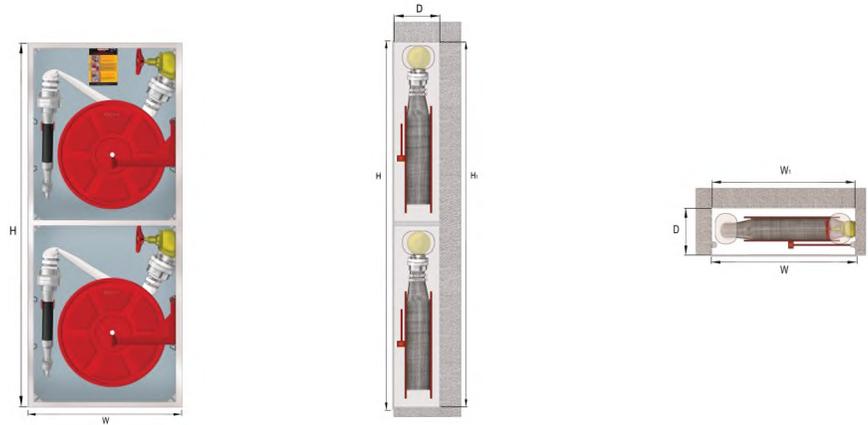

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-2811.1	Recessed	Double Full Overlay Metal Sheet Door, Recessed Handle	2" - 20 m	-	Optional	700	1400	200	660	1360
SE2-2811.3	Recessed	Double Full Overlay Metal Sheet Door, Recessed Handle	2" - 30 m	-	Optional	700	1400	200	660	1360
SE2-2821.1	Surface	Double Full Overlay Metal Sheet Door, Recessed Handle	2" - 20 m	-	Optional	700	1400	200	700	1400
SE2-2821.3	Surface	Double Full Overlay Metal Sheet Door, Recessed Handle	2" - 30 m	-	Optional	700	1400	200	700	1400

► CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable.

► HOSE REEL

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► CABINET DOOR

- Full overlay metal sheet door, recessed handle
- Laser cut warning signs on the surface.
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.

FIRE CABINET


LAY – FLAT HOSE

DOUBLE FULL OVERLAY METAL SHEET DOOR, CHROME PLATED HANDLE, DOUBLE HOSE REEL



▶ SE2-2812.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

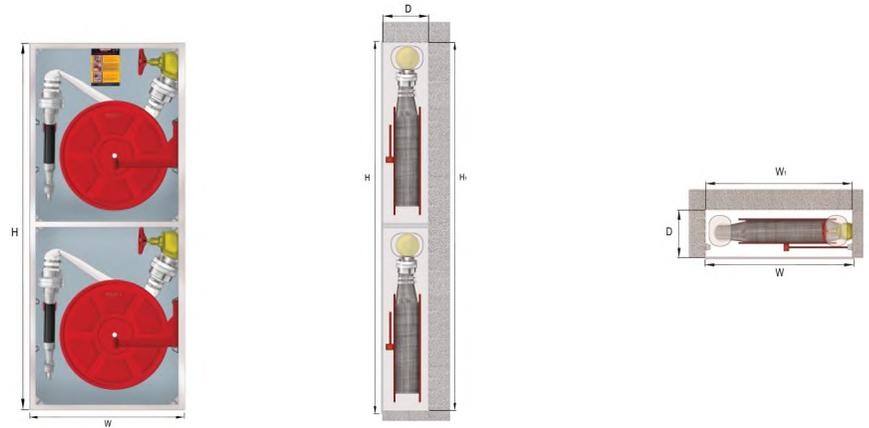

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-2812.1	Recessed	Double Full Overlay Metal Sheet Door, Chrome Plated Handle	2" - 20 m	-	Optional	700	1400	200	660	1360
SE2-2812.3	Recessed	Double Full Overlay Metal Sheet Door, Chrome Plated Handle	2" - 30 m	-	Optional	700	1400	200	660	1360
SE2-2822.1	Surface	Double Full Overlay Metal Sheet Door, Chrome Plated Handle	2" - 20 m	-	Optional	700	1400	200	700	1400
SE2-2822.3	Surface	Double Full Overlay Metal Sheet Door, Chrome Plated Handle	2" - 30 m	-	Optional	700	1400	200	700	1400

▶ **CABINET HOUSING**

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable.

▶ **HOSE REEL**

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.

▶ **CABINET DOOR**

- Full overlay metal sheet door, chrome plated handle
- Laser cut warning signs on the surface
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.

FIRE CABINET


LAY – FLAT HOSE

DOUBLE INSET METAL SHEET DOOR, DOUBLE HOSE REEL



► SE2-2813.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

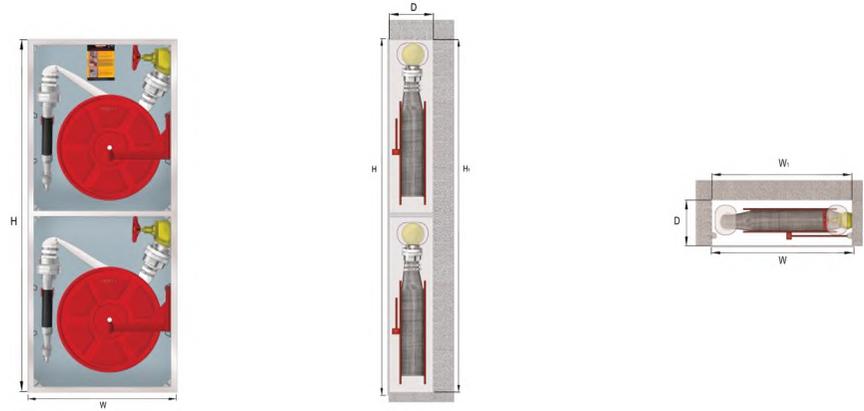

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-2813.1	Recessed	Double Inset Metal Sheet Door	2" - 20 m	-	Optional	700	1400	200	660	1360
SE2-2813.3	Recessed	Double Inset Metal Sheet Door	2" - 30 m	-	Optional	700	1400	200	660	1360
SE2-2823.1	Surface	Double Inset Metal Sheet Door	2" - 20 m	-	Optional	700	1400	200	700	1400
SE2-2823.3	Surface	Double Inset Metal Sheet Door	2" - 30 m	-	Optional	700	1400	200	700	1400

► CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable.

► HOSE REEL

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" lat flay fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► CABINET DOOR

- Inset metal sheet door with radial frame, chrome plated handle
- Relief warning signs on the surface
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with continuous hinges, optionally stainless hinges or invisible hinges obtainable.


FIRE CABINET

LAY – FLAT HOSE

DOUBLE INSET GLASS DOOR, DOUBLE HOSE REEL



- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

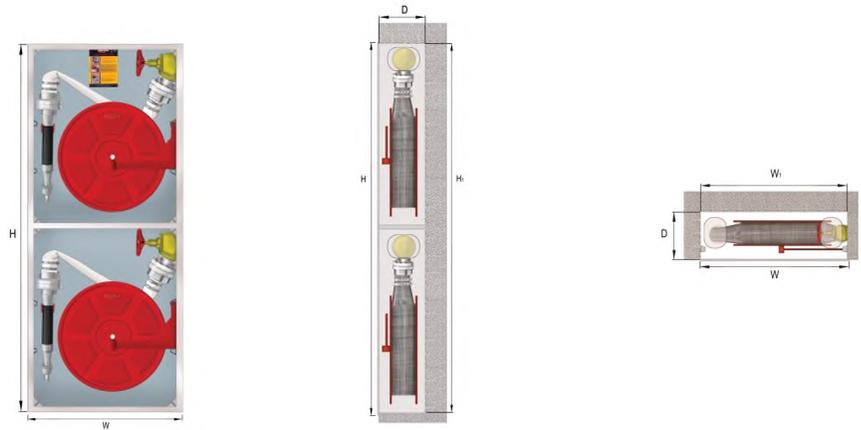

▶ SE2-2814.1

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-2814.1	Recessed	Double Inset Glass Door	2" - 20 m	-	Optional	700	1400	200	660	1360
SE2-2814.3	Recessed	Double Inset Glass Door	2" - 30 m	-	Optional	700	1400	200	660	1360
SE2-2824.1	Surface	Double Inset Glass Door	2" - 20 m	-	Optional	700	1400	200	700	1400
SE2-2824.3	Surface	Double Inset Glass Door	2" - 30 m	-	Optional	700	1400	200	700	1400

▶ **CABINET HOUSING**

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable.

▶ **HOSE REEL**

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.


▶ **CABINET DOOR**

- Inset glass door with radial frame, chrome plated handle
- 4 mm thick tempered smoke glass
- Screen printed warning signs are fired at 700°C
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with continuous hinges, optionally stainless hinges or invisible hinges obtainable.

FIRE CABINET


LAY – FLAT HOSE

FULL OVERLAY DOUBLE GLASS DOOR , DOUBLE HOSE REEL

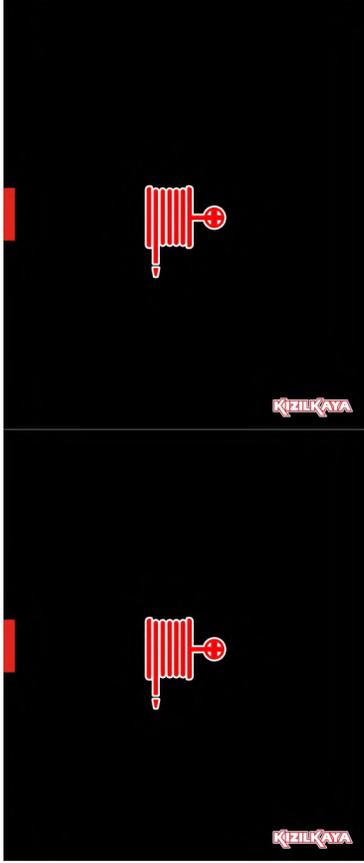

► SE2-2815.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

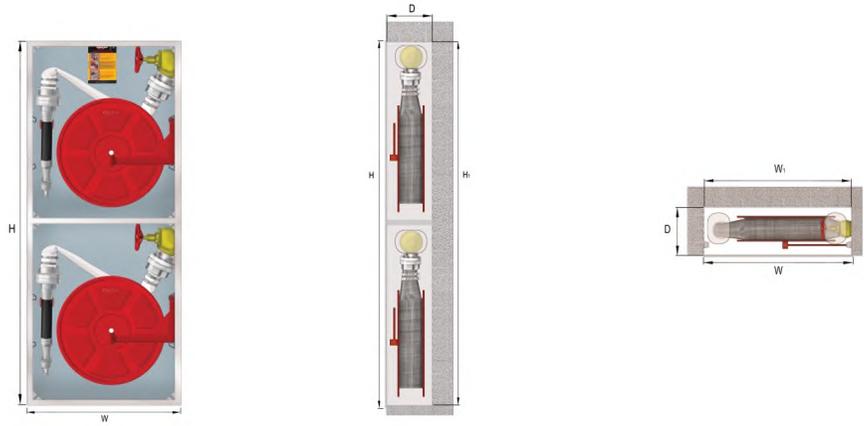

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-2815.1	Recessed	Full Overlay Double Glass Door	2" - 20 m	-	Opsiyonel	700	1400	200	660	1360
SE2-2815.3	Recessed	Full Overlay Double Glass Door	2" - 30 m	-	Opsiyonel	700	1400	200	660	1360
SE2-2825.1	Surface	Full Overlay Double Glass Door	2" - 20 m	-	Opsiyonel	700	1400	200	700	1400
SE2-2825.3	Surface	Full Overlay Double Glass Door	2" - 30 m	-	Opsiyonel	700	1400	200	700	1400

► CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable.

► HOSE REEL

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" lat flay fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► CABINET DOOR

- Full overlay glass door
- 4 mm thick tempered black glass
- Screen printed warning signs are fired at 700°C
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.

FIRE CABINET


LAY – FLAT HOSE

FULL OVERLAY DOUBLE GLASS DOOR WITH FRAME, CHROME PLATED HANDLE, DOUBLE HOSE REEL



► SE2-2816.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

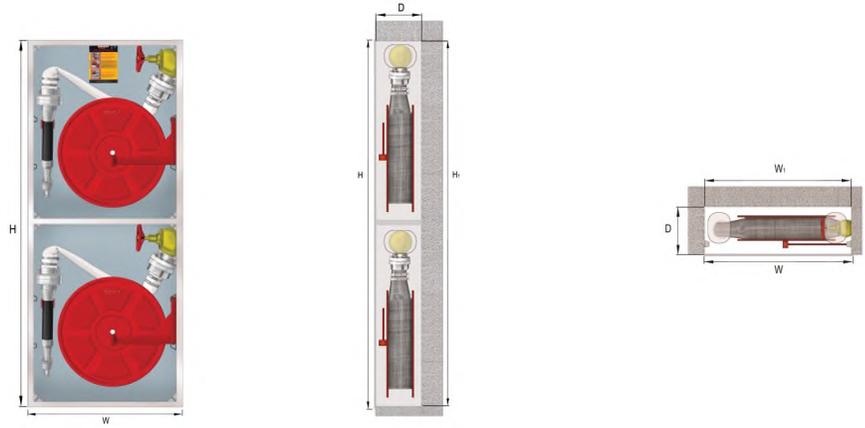

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W _i mm	H _i mm
SE2-2816.1	Recessed	Full Overlay Double Glass Door With Frame, Chrome Plated Handle	2" - 20 m	-	Optional	700	1400	200	660	1360
SE2-2816.3	Recessed	Full Overlay Double Glass Door With Frame, Chrome Plated Handle	2" - 30 m	-	Optional	700	1400	200	660	1360
SE2-2826.1	Surface	Full Overlay Double Glass Door With Frame, Chrome Plated Handle	2" - 20 m	-	Optional	700	1400	200	700	1400
SE2-2826.3	Surface	Full Overlay Double Glass Door With Frame, Chrome Plated Handle	2" - 30 m	-	Optional	700	1400	200	700	1400

► CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable.üstü olarak üretilmektedir.

► HOSE REEL

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► CABINET DOOR

- Full overlay glass door with frame, chrome plated handle.
- 4 mm thick tempered smoke glass
- Screen printed warning signs are fired at 700°C
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.


FIRE CABINET

LAY – FLAT HOSE

SINGLE FULL OVERLAY METAL SHEET DOOR, RECESSED HANDLE, DOUBLE HOSE REEL, HORIZONTAL FIRE EXTINGUISHER SECTION



- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

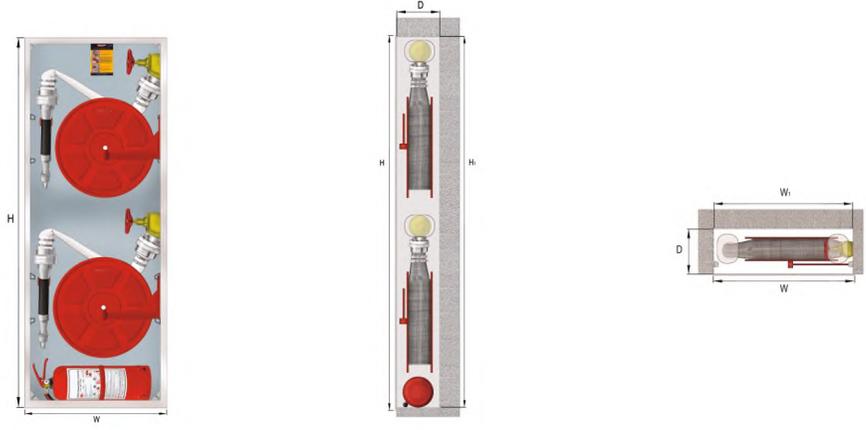

► SE2-2911.1

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-2911.1	Recessed	Full Overlay Metal Sheet Door, Recessed Handle	2" - 20 m	1 Tube / 6 kg	Optional	700	1600	200	660	1560
SE2-2911.3	Recessed	Full Overlay Metal Sheet Door, Recessed Handle	2" - 30 m	1 Tube / 6 kg	Optional	700	1600	200	660	1560
SE2-2921.1	Surface	Full Overlay Metal Sheet Door, Recessed Handle	2" - 20 m	1 Tube / 6 kg	Optional	700	1600	200	700	1600
SE2-2921.3	Surface	Full Overlay Metal Sheet Door, Recessed Handle	2" - 30 m	1 Tube / 6 kg	Optional	700	1600	200	700	1600

► CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable.

► HOSE REEL

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" lat flay fire hose
- All connections are made with whipcheck safety cables instead of clamps.


► CABINET DOOR

- Full overlay metal sheet door recessed handle
- Laser cut warning signs on the surface
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.


FIRE CABINET

LAY – FLAT HOSE

FULL OVERLAY SINGLE METAL SHEET DOOR, CHROME PLATED HANDLE, DOUBLE HOSE REEL, HORIZONTAL FIRE EXTINGUISHER SECTION

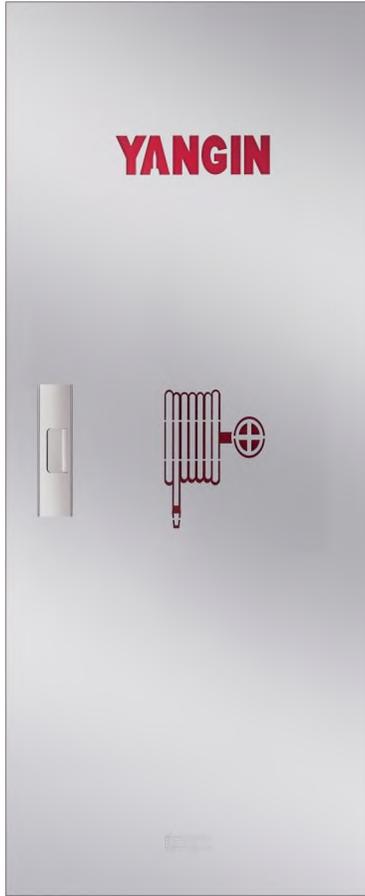

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

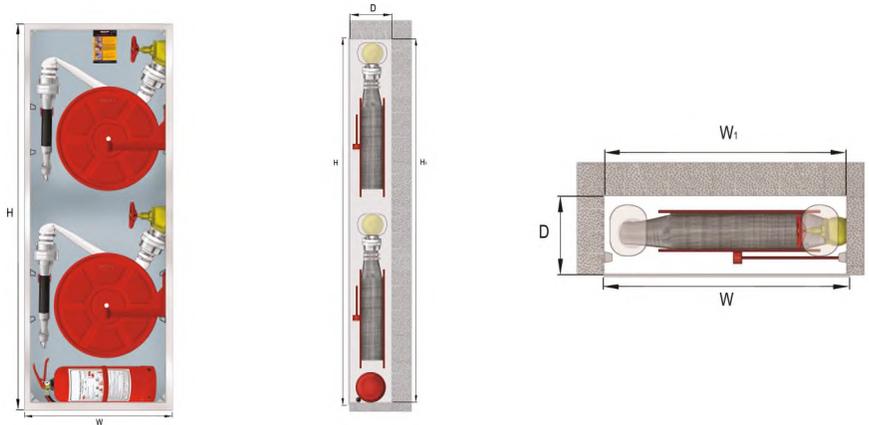

► SE2-2912.1

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-2912.1	Recessed	Full Overlay Metal Sheet Door, Chrome Plated Handle	2" - 20 m	1 Tube / 6 kg	Optional	700	1600	200	660	1560
SE2-2912.3	Recessed	Full Overlay Metal Sheet Door, Chrome Plated Handle	2" - 30 m	1 Tube / 6 kg	Optional	700	1600	200	660	1560
SE2-2922.1	Surface	Full Overlay Metal Sheet Door, Chrome Plated Handle	2" - 20 m	1 Tube / 6 kg	Optional	700	1600	200	700	1600
SE2-2922.3	Surface	Full Overlay Metal Sheet Door, Chrome Plated Handle	2" - 30 m	1 Tube / 6 kg	Optional	700	1600	200	700	1600

► **CABINET HOUSING**

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable.

► **HOSE REEL**

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► **CABINET DOOR**

- Full overlay metal sheet door, chrome plated handle
- Laser cut warnin signs on the surface
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.


FIRE CABINET

LAY – FLAT HOSE

SINGLE INSET METAL SHEET DOOR, DOUBLE HOSE REEL, HORIZONTAL FIRE EXTINGUISHER SECTION



- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

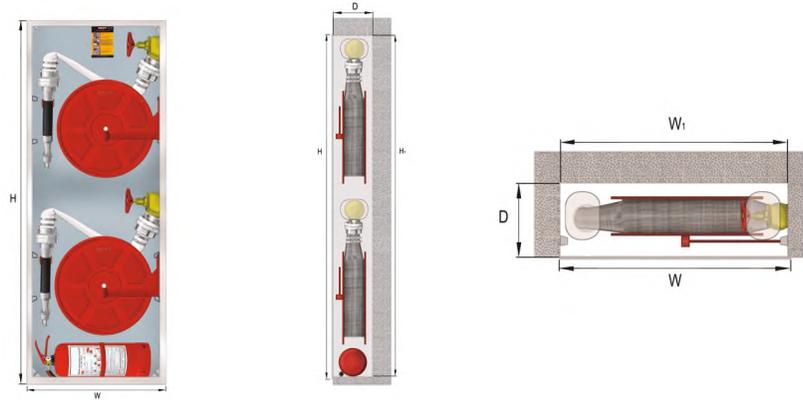

► SE2-2913.1

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-2913.1	Recessed	Inset Metal Sheet Door	2" - 20 m	1 Tube / 6 kg	Optional	700	1600	200	660	1560
SE2-2913.3	Recessed	Inset Metal Sheet Door	2" - 30 m	1 Tube / 6 kg	Optional	700	1600	200	660	1560
SE2-2923.1	Surface	Inset Metal Sheet Door	2" - 20 m	1 Tube / 6 kg	Optional	700	1600	200	700	1600
SE2-2923.3	Surface	Inset Metal Sheet Door	2" - 30 m	1 Tube / 6 kg	Optional	700	1600	200	700	1600

► CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation
- Hose reel can be left or right mounted
- Surface mount or recessed mount types obtainable.

► HOSE REEL

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" lat flay fire hose
- All connections are made with whipcheck safety cables instead of clamps.


► CABINET DOOR

- Inset metal sheet door with radial frame, chrome plated handle
- Relief warning signs on the surface.
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with continuous hinges, optionally stainless hinges or invisible hinges obtainable.

FIRE CABINET

LAY – FLAT HOSE

SINGLE INSET GLASS DOOR, DOUBLE HOSE REEL, HORIZONTAL FIRE EXTINGUISHER SECTION

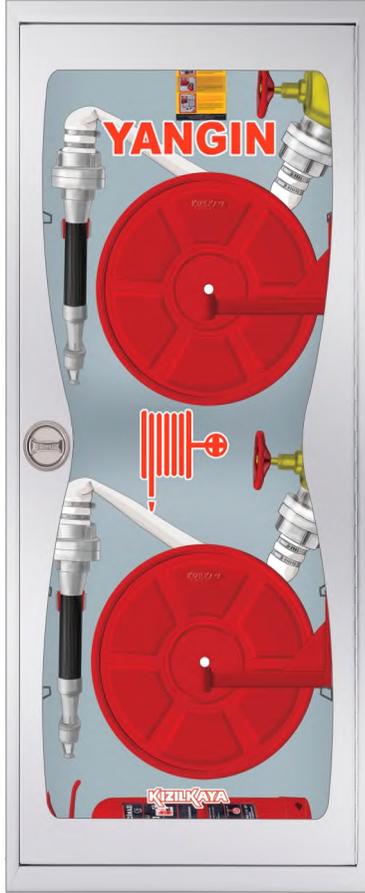

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.



► SE2-2914.1

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W _i mm	H _i mm
SE2-2914.1	Recessed	Single Inset Glass Door	2" - 20 m	1 Tube / 6 kg	Optional	700	1600	200	660	1560
SE2-2914.3	Recessed	Single Inset Glass Door	2" - 30 m	1 Tube / 6 kg	Optional	700	1600	200	660	1560
SE2-2924.1	Surface	Single Inset Glass Door	2" - 20 m	1 Tube / 6 kg	Optional	700	1600	200	700	1600
SE2-2924.3	Surface	Single Inset Glass Door	2" - 30 m	1 Tube / 6 kg	Optional	700	1600	200	700	1600

► CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation.
- Hose reel can be left or right mounted.
- Surface mount or recessed mount types obtainable.

► HOSE REEL

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.


► CABINET DOOR

- Inset glass door with radial frame, chrome plated handle
- 4 mm thick tempered smoke glass
- Screen printed warning signs are fired at 700°C
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with continuous hinges, optionally stainless hinges or invisible hinges obtainable.


FIRE CABINET

LAY – FLAT HOSE

SINGLE FULL OVERLAY GLASS DOOR, DOUBLE HOSE REEL, HORIZONTAL FIRE EXTINGUISHER SECTION

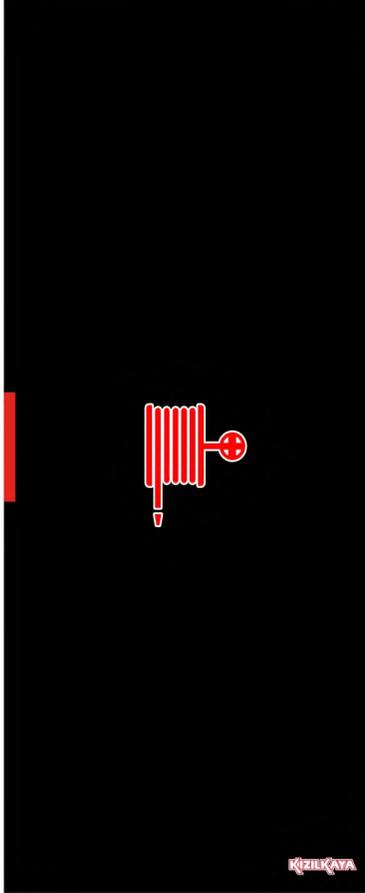

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

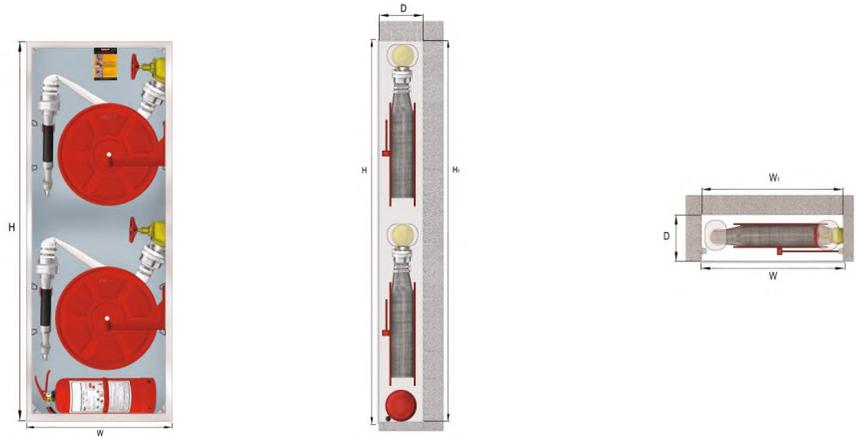

► SE2-2915.1

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-2915.1	Recessed	Full Overlay Glass Door	2" - 20 m	1 Tube / 6 kg	Optional	700	1600	200	660	1560
SE2-2915.3	Recessed	Full Overlay Glass Door	2" - 30 m	1 Tube / 6 kg	Optional	700	1600	200	660	1560
SE2-2925.1	Surface	Full Overlay Glass Door	2" - 20 m	1 Tube / 6 kg	Optional	700	1600	200	700	1600
SE2-2925.3	Surface	Full Overlay Glass Door	2" - 30 m	1 Tube / 6 kg	Optional	700	1600	200	700	1600

► CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation.
- Hose reel can be left or right mounted.
- Surface mount or recessed mount types obtainable.

► HOSE REEL

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.


► CABINET DOOR

- Full overlay glass door
- 4 mm thick tempered black glass
- Screen printed warning signs are fired at 700°C
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.


FIRE CABINET

LAY – FLAT HOSE

SINGLE FULL OVERLAY GLASS DOOR WITH FRAME, CHROME PLATED HANDLE, DOUBLE HOSE REEL, HORIZONTAL FIRE EXTINGUISHER SECTION

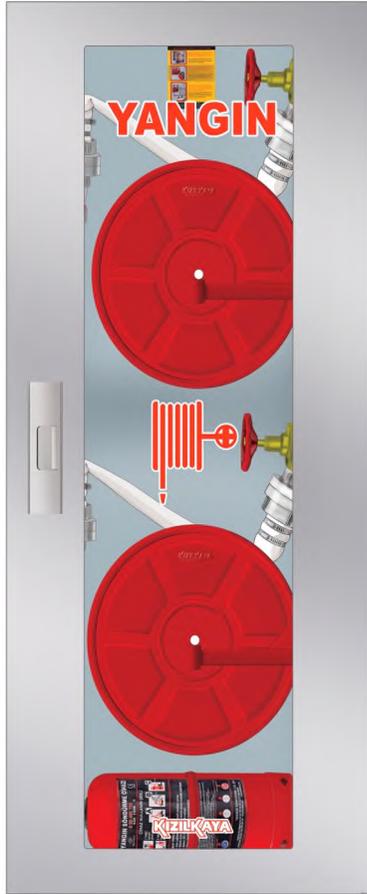

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

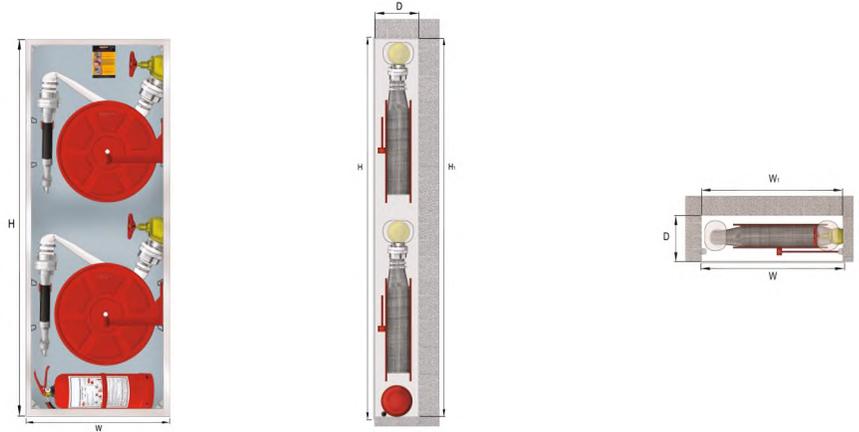

► **SE2-2916.1**

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W _i mm	H _i mm
SE2-2916.1	Recessed	Full Overlay Glass Door With Frame, Chrome Plated Handle	2" - 20 m	1 Tube / 6 kg	Optional	700	1600	200	660	1560
SE2-2916.3	Recessed	Full Overlay Glass Door With Frame, Chrome Plated Handle	2" - 30 m	1 Tube / 6 kg	Optional	700	1600	200	660	1560
SE2-2926.1	Surface	Full Overlay Glass Door With Frame, Chrome Plated Handle	2" - 20 m	1 Tube / 6 kg	Optional	700	1600	200	700	1600
SE2-2926.3	Surface	Full Overlay Glass Door With Frame, Chrome Plated Handle	2" - 30 m	1 Tube / 6 kg	Optional	700	1600	200	700	1600

► **CABINET HOUSING**

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation.
- Hose reel can be left or right mounted.
- Surface mount or recessed mount types obtainable.

► **HOSE REEL**

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► **CABINET DOOR**

- Full overlay glass door with frame, chrome plated handle
- 4 mm thick tempered smoke glass
- Screen printed warning signs are fired at 700°C
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.


FIRE CABINET

LAY – FLAT HOSE

DOUBLE FULL OVERLAY METAL SHEET DOOR, RECESSED HANDLE, DOUBLE HOSE REEL, HORIZONTAL FIRE EXTINGUISHER SECTION



- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

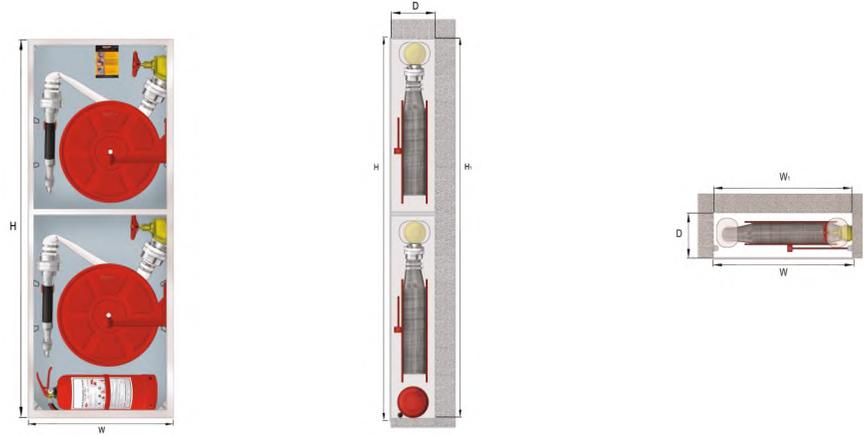

► SE2-3011.1

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-3011.1	Recessed	Double Full Overlay Metal Sheet Door, Recessed Handle	2" - 20 m	1 Tube / 6 kg	Optional	700	1600	200	660	1560
SE2-3011.3	Recessed	Double Full Overlay Metal Sheet Door, Recessed Handle	2" - 30 m	1 Tube / 6 kg	Optional	700	1600	200	660	1560
SE2-3021.1	Surface	Double Full Overlay Metal Sheet Door, Recessed Handle	2" - 20 m	1 Tube / 6 kg	Optional	700	1600	200	700	1600
SE2-3021.3	Surface	Double Full Overlay Metal Sheet Door, Recessed Handle	2" - 30 m	1 Tube / 6 kg	Optional	700	1600	200	700	1600

► CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation.
- Hose reel can be left or right mounted.
- Surface mount or recessed mount types obtainable.

► HOSE REEL

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► CABINET DOOR

- Full overlay metal sheet door, recessed handle
- Laser cut warning signs on the surface
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.


FIRE CABINET

LAY – FLAT HOSE

DOUBLE FULL OVERLAY METAL SHEET DOOR, CHROME PLATED HANDLE, DOUBLE HOSE REEL, HORIZONTAL FIRE EXTINGUISHER SECTION



- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

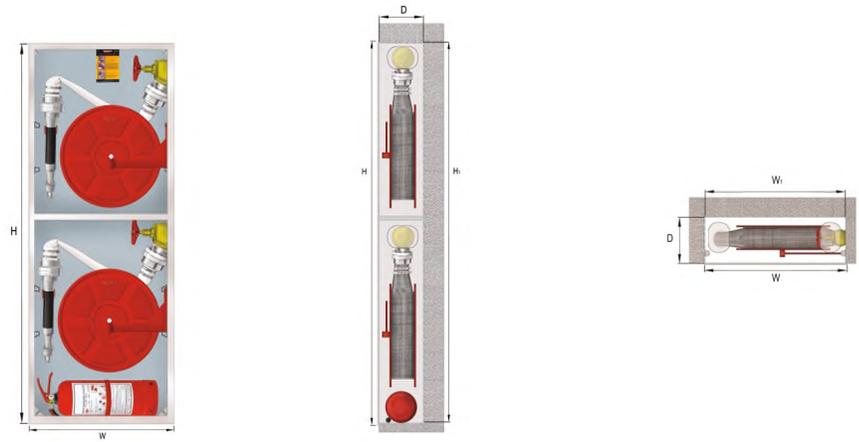

► **SE2-3012.1**

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-3012.1	Recessed	Double Full Overlay Metal Sheet Door, Chrome Plated Handle	2" - 20 m	1 Tube / 6 kg	Optional	700	1600	200	660	1560
SE2-3012.3	Recessed	Double Full Overlay Metal Sheet Door, Chrome Plated Handle	2" - 30 m	1 Tube / 6 kg	Optional	700	1600	200	660	1560
SE2-3022.1	Surface	Double Full Overlay Metal Sheet Door, Chrome Plated Handle	2" - 20 m	1 Tube / 6 kg	Optional	700	1600	200	700	1600
SE2-3022.3	Surface	Double Full Overlay Metal Sheet Door, Chrome Plated Handle	2" - 30 m	1 Tube / 6 kg	Optional	700	1600	200	700	1600

► **CABINET HOUSING**

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation.
- Hose reel can be left or right mounted.
- Surface mount or recessed mount types obtainable.

► **HOSE REEL**

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► **CABINET DOOR**

- Full overlay metal sheet door, chrome plated handle
- Laser cut warning signs on the surface.
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.


FIRE CABINET

LAY – FLAT HOSE

DOUBLE INSET METAL SHEET DOOR, DOUBLE HOSE REEL, HORIZONTAL FIRE EXTINGUISHER SECTION



- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

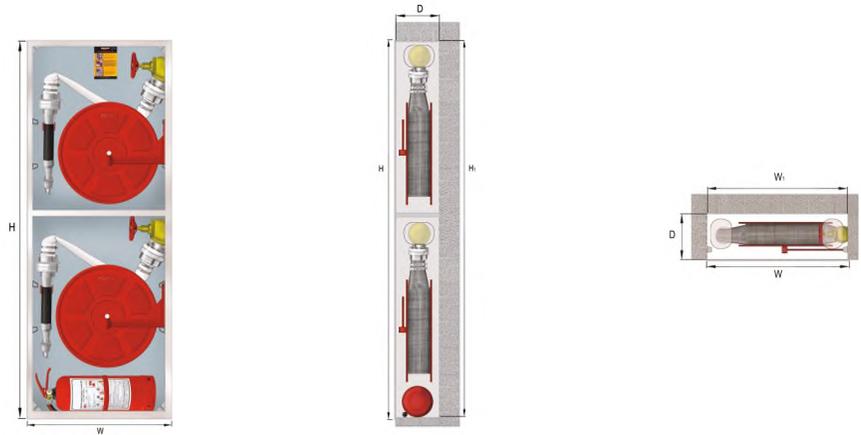

► SE2-3013.1

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-3013.1	Recessed	Double Inset Metal Sheet Door	2" - 20 m	1 Tube / 6 kg	Optional	700	1600	200	660	1560
SE2-3013.3	Recessed	Double Inset Metal Sheet Door	2" - 30 m	1 Tube / 6 kg	Optional	700	1600	200	660	1560
SE2-3023.1	Surface	Double Inset Metal Sheet Door	2" - 20 m	1 Tube / 6 kg	Optional	700	1600	200	700	1600
SE2-3023.3	Surface	Double Inset Metal Sheet Door	2" - 30 m	1 Tube / 6 kg	Optional	700	1600	200	700	1600

► CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation.
- Hose reel can be left or right mounted.
- Surface mount or recessed mount types obtainable.

► HOSE REEL

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" lat flay fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► CABINET DOOR

- Inset metal sheet door with radial frame, chrome plated handle
- Relief warning signs on the surface
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with continuous hinges, optionally stainless hinges or invisible hinges obtainable.


FIRE CABINET

LAY – FLAT HOSE

DOUBLE INSET GLASS DOOR, DOUBLE HOSE REEL, HORIZONTAL FIRE EXTINGUISHER SECTION



- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

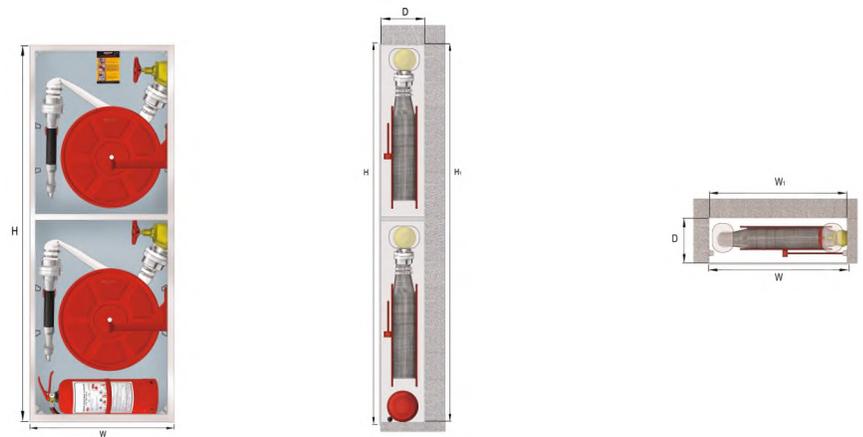

► SE2-3014.1

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-3014.1	Recessed	Double Inset Glass Door	2" - 20 m	1 Tube / 6 kg	Optional	700	1600	200	660	1560
SE2-3014.3	Recessed	Double Inset Glass Door	2" - 30 m	1 Tube / 6 kg	Optional	700	1600	200	660	1560
SE2-3024.1	Surface	Double Inset Glass Door	2" - 20 m	1 Tube / 6 kg	Optional	700	1600	200	700	1600
SE2-3024.3	Surface	Double Inset Glass Door	2" - 30 m	1 Tube / 6 kg	Optional	700	1600	200	700	1600

► CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation.
- Hose reel can be left or right mounted.
- Surface mount or recessed mount types obtainable.

► HOSE REEL

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.


► CABINET DOOR

- Inset glass door with radial frame, chrome plated handle.
- 4 mm thick tempered smoke glass
- Screen printed warning signs are fired at 700°C
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with continuous hinges, optionally stainless hinges or invisible hinges obtainable.


FIRE CABINET

LAY – FLAT HOSE

DOUBLE FULL OVERLAY GLASS DOOR, DOUBLE HOSE REEL, HORIZONTAL FIRE EXTINGUISHER SECTION

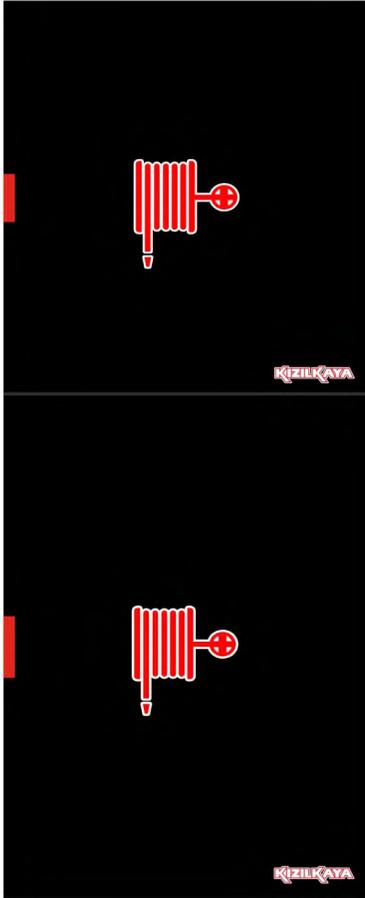

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

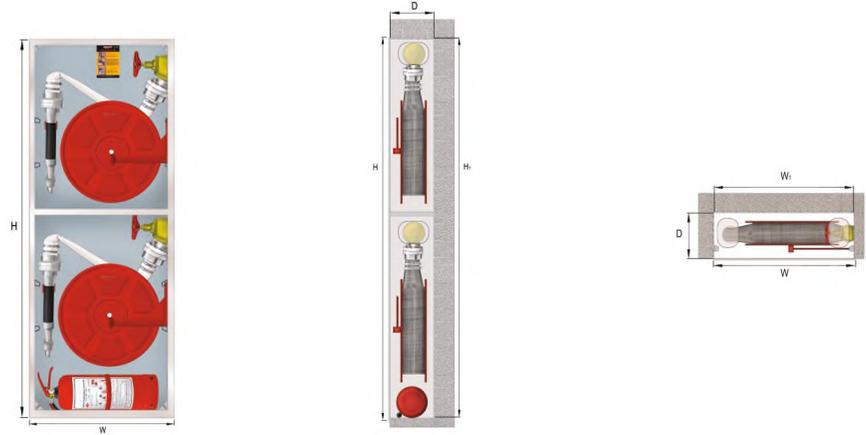

► SE2-3015.1

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-3015.1	Recessed	Double Full Overlay Glass Door	2" - 20 m	1 Tube / 6 kg	Optional	700	1600	200	660	1560
SE2-3015.3	Recessed	Double Full Overlay Glass Door	2" - 30 m	1 Tube / 6 kg	Optional	700	1600	200	660	1560
SE2-3025.1	Surface	Double Full Overlay Glass Door	2" - 20 m	1 Tube / 6 kg	Optional	700	1600	200	700	1600
SE2-3025.3	Surface	Double Full Overlay Glass Door	2" - 30 m	1 Tube / 6 kg	Optional	700	1600	200	700	1600

► CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation.
- Hose reel can be left or right mounted.
- Surface mount or recessed mount types obtainable.

► HOSE REEL

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► CABINET DOOR

- Full overlay glass door
- 4 mm thick tempered black glass
- Screen printed warning signs are fired at 700°C
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.


FIRE CABINET

LAY – FLAT HOSE

DOUBLE FULL OVERLAY GLASS DOOR WITH FRAME, CHROME PLATED HANDLE, DOUBLE HOSE REEL, HORIZONTAL FIRE EXTINGUISHER SECTION



- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

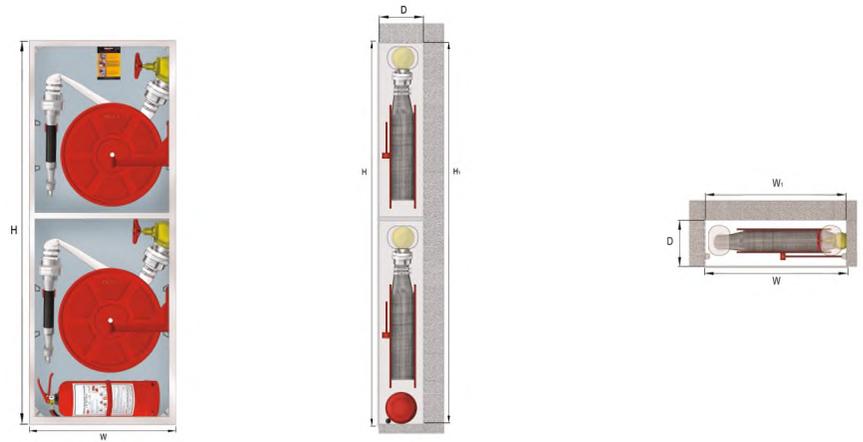

► **SE2-3016.1**

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-3016.1	Recessed	Double Full Overlay Glass Door With Frame, Chrome Plated Handle	2" - 20 m	1 Tube / 6 kg	Optional	700	1600	200	660	1560
SE2-3016.3	Recessed	Double Full Overlay Glass Door With Frame, Chrome Plated Handle	2" - 30 m	1 Tube / 6 kg	Optional	700	1600	200	660	1560
SE2-3026.1	Surface	Double Full Overlay Glass Door With Frame, Chrome Plated Handle	2" - 20 m	1 Tube / 6 kg	Optional	700	1600	200	700	1600
SE2-3026.3	Surface	Double Full Overlay Glass Door With Frame, Chrome Plated Handle	2" - 30 m	1 Tube / 6 kg	Optional	700	1600	200	700	1600

► **CABINET HOUSING**

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation.
- Hose reel can be left or right mounted.
- Surface mount or recessed mount types obtainable.

► **HOSE REEL**

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► **CABINET DOOR**

- Full overlay glass door with frame, chrome plated handle
- 4 mm thick tempered smoke glass
- Screen printed warning signs are fired at 700°C
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.

FIRE CABINET


LAY – FLAT HOSE

SINGLE FULL OVERLAY METAL SHEET DOOR, RECESSED HANDLE, DOUBLE HOSE REEL, VERTICAL SECTION FOR 2 TUBES



► SE2-3111.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

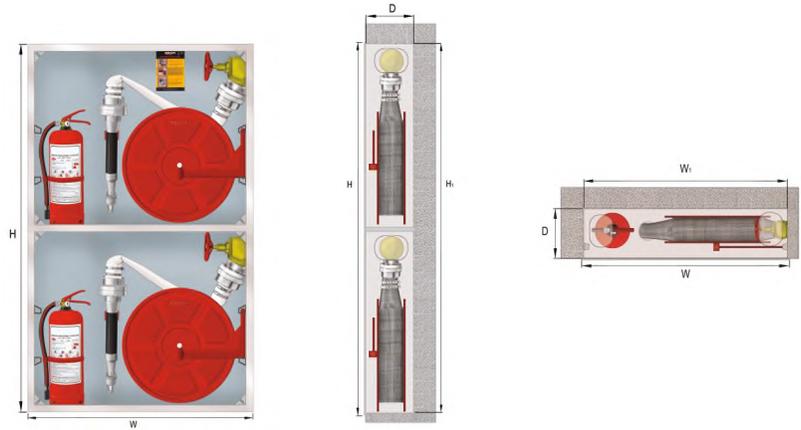

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-3111.1	Recessed	Full Overlay Metal Sheet Door, Recessed Handle	2" - 20 m	2 Tube / 6 kg	Optional	800	1400	200	760	1360
SE2-3111.3	Recessed	Full Overlay Metal Sheet Door, Recessed Handle	2" - 30 m	2 Tube / 6 kg	Optional	800	1400	200	760	1360
SE2-3121.1	Surface	Full Overlay Metal Sheet Door, Recessed Handle	2" - 20 m	2 Tube / 6 kg	Optional	800	1400	200	800	1400
SE2-3121.3	Surface	Full Overlay Metal Sheet Door, Recessed Handle	2" - 30 m	2 Tube / 6 kg	Optional	800	1400	200	800	1400

► CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation.
- Hose reel can be left or right mounted.
- Surface mount or recessed mount types obtainable.

► HOSE REEL

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► CABINET DOOR

- Full overlay metal sheet door, recessed handle.
- Laser cut warning signs on the surface
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.

FIRE CABINET


LAY – FLAT HOSE

SINGLE FULL OVERLAY METAL SHEET DOOR, CHROME PLATED HANDLE, DOUBLE HOSE REEL, VERTICAL SECTION FOR 2 TUBES



► SE2-3112.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

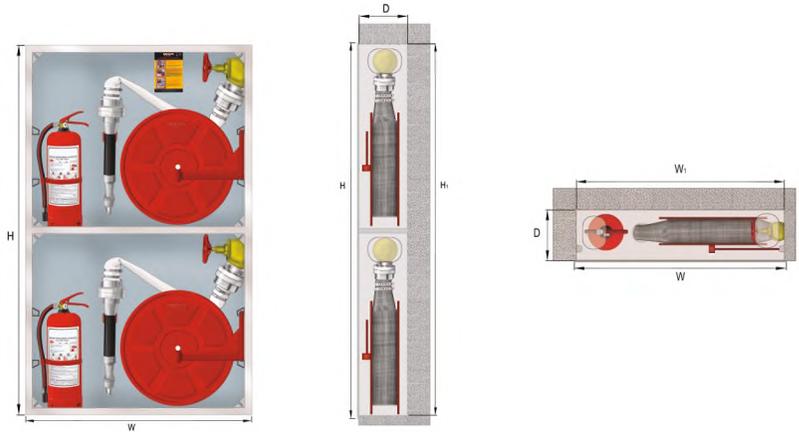

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-3112.1	Recessed	Full Overlay Metal Sheet Door, Chrome Plated Handle	2" - 20 m	2 Tube / 6 kg	Optional	800	1400	200	760	1360
SE2-3112.3	Recessed	Full Overlay Metal Sheet Door, Chrome Plated Handle	2" - 30 m	2 Tube / 6 kg	Optional	800	1400	200	760	1360
SE2-3122.1	Surface	Full Overlay Metal Sheet Door, Chrome Plated Handle	2" - 20 m	2 Tube / 6 kg	Optional	800	1400	200	800	1400
SE2-3122.3	Surface	Full Overlay Metal Sheet Door, Chrome Plated Handle	2" - 30 m	2 Tube / 6 kg	Optional	800	1400	200	800	1400

► **CABINET HOUSING**

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation.
- Hose reel can be left or right mounted.
- Surface mount or recessed mount types obtainable.

► **HOSE REEL**

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► **CABINET DOOR**

- Full overlay metal sheet door, chrome plated handle
- Laser cut warning signs on the surface
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.

FIRE CABINET


LAY – FLAT HOSE

SINGLE INSET METAL SHEET DOOR, DOUBLE HOSE REEL, VERTICAL SECTION FOR 2 TUBES



► SE2-3113.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

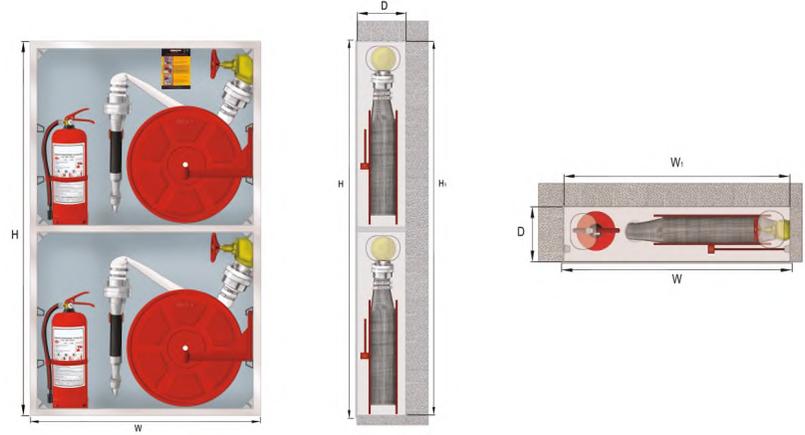

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-3113.1	Recessed	Inset Metal Sheet Door	2" - 20 m	2 Tube / 6 kg	Optional	800	1400	200	760	1360
SE2-3113.3	Recessed	Inset Metal Sheet Door	2" - 30 m	2 Tube / 6 kg	Optional	800	1400	200	760	1360
SE2-3123.1	Surface	Inset Metal Sheet Door	2" - 20 m	2 Tube / 6 kg	Optional	800	1400	200	800	1400
SE2-3123.3	Surface	Inset Metal Sheet Door	2" - 30 m	2 Tube / 6 kg	Optional	800	1400	200	800	1400

► CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation.
- Hose reel can be left or right mounted.
- Surface mount or recessed mount types obtainable.

► HOSE REEL

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" lat flay fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► CABINET DOOR

- Inset metal sheet door, chrome plated handle
- Relief warning signs on the surface
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with continuous hinges, optionally stainless hinges or invisible hinges obtainable.

FIRE CABINET


LAY – FLAT HOSE

SINGLE INSET GLASS DOOR, DOUBLE HOSE REEL, VERTICAL SECTION FOR 2 TUBES



► SE2-3114.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

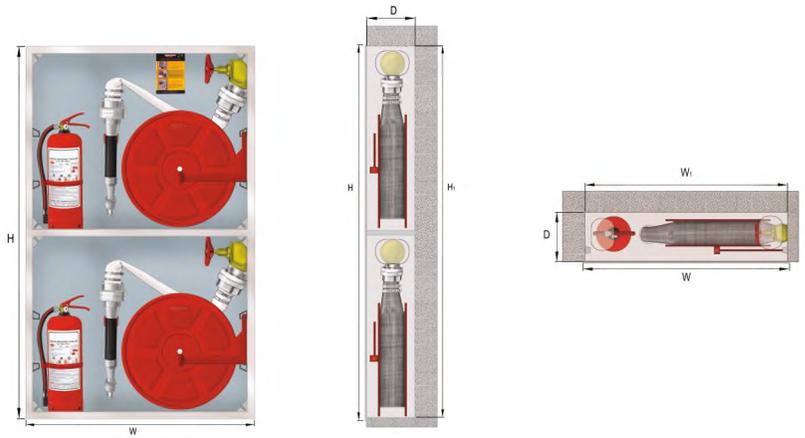

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-3114.1	Recessed	Inset Glass Door	2" - 20 m	2 Tube / 6 kg	Optional	800	1400	200	760	1360
SE2-3114.3	Recessed	Inset Glass Door	2" - 30 m	2 Tube / 6 kg	Optional	800	1400	200	760	1360
SE2-3124.1	Surface	Inset Glass Door	2" - 20 m	2 Tube / 6 kg	Optional	800	1400	200	800	1400
SE2-3124.3	Surface	Inset Glass Door	2" - 30 m	2 Tube / 6 kg	Optional	800	1400	200	800	1400

► **CABINET HOUSING**

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation.
- Hose reel can be left or right mounted.
- Surface mount or recessed mount types obtainable.

► **HOSE REEL**

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.


► **CABINET DOOR**

- Inset glass door with radial frame, chrome plated handle.
- 4 mm thick tempered smoke glass
- Screen printed warning signs are fired at 700°C
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with continuous hinges, optionally stainless hinges or invisible hinges obtainable.

FIRE CABINET


LAY – FLAT HOSE

SINGLE FULL OVERLAY GLASS DOOR, DOUBLE HOSE REEL, VERTICAL SECTION FOR 2 TUBES

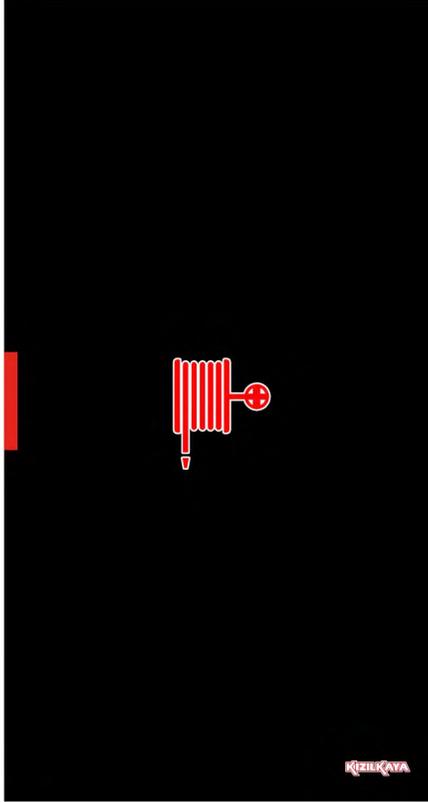

► SE2-3115.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

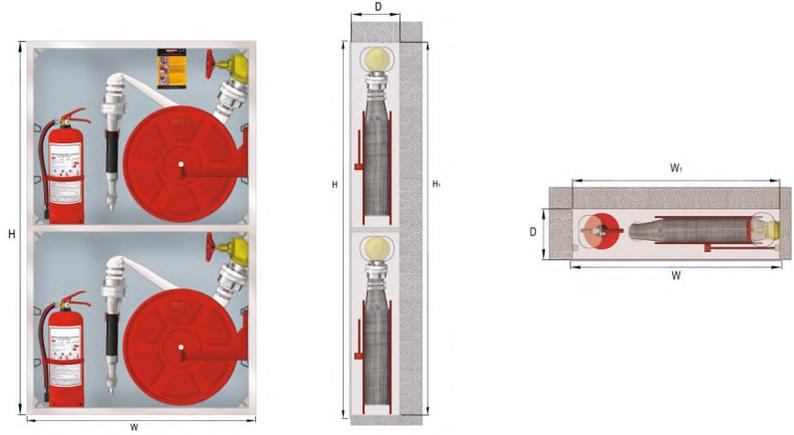

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-3115.1	Recessed	Full Overlay Glass Door	2" - 20 m	2 Tube / 6 kg	Optional	800	1400	200	760	1360
SE2-3115.3	Recessed	Full Overlay Glass Door	2" - 30 m	2 Tube / 6 kg	Optional	800	1400	200	760	1360
SE2-3125.1	Surface	Full Overlay Glass Door	2" - 20 m	2 Tube / 6 kg	Optional	800	1400	200	800	1400
SE2-3125.3	Surface	Full Overlay Glass Door	2" - 30 m	2 Tube / 6 kg	Optional	800	1400	200	800	1400

► CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation.
- Hose reel can be left or right mounted.
- Surface mount or recessed mount types obtainable.

► HOSE REEL

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► CABINET DOOR

- Inset glass door.
- 4 mm thick tempered black glass
- Screen printed warning signs are fired at 700°C
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.

FIRE CABINET


LAY – FLAT HOSE

FULL OVERLAY GLASS DOOR WITH FRAME, CHROME PLATED HANDLE, DOUBLE HOSE REEL, VERTICAL SECTION FOR 2 TUBES



► SE2-3116.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

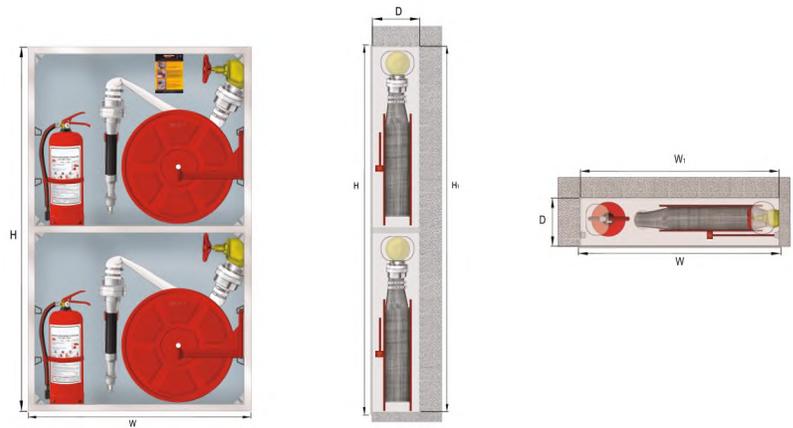

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-3116.1	Recessed	Full Overlay Glass Door With Frame, Chrome Plated Handle	2" - 20 m	2 Tube / 6 kg	Optional	800	1400	200	760	1360
SE2-3116.3	Recessed	Full Overlay Glass Door With Frame, Chrome Plated Handle	2" - 30 m	2 Tube / 6 kg	Optional	800	1400	200	760	1360
SE2-3126.1	Surface	Full Overlay Glass Door With Frame, Chrome Plated Handle	2" - 20 m	2 Tube / 6 kg	Optional	800	1400	200	800	1400
SE2-3126.3	Surface	Full Overlay Glass Door With Frame, Chrome Plated Handle	2" - 30 m	2 Tube / 6 kg	Optional	800	1400	200	800	1400

► **CABINET HOUSING**

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation.
- Hose reel can be left or right mounted.
- Surface mount or recessed mount types obtainable.

► **HOSE REEL**

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► **CABINET DOOR**

- Full overlay glass door with frame, chrome plated handle
- 4 mm thick tempered smoke glass
- Screen printed warning signs are fired at 700°C
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.

FIRE CABINET


LAY – FLAT HOSE

DOUBLE FLAT OVERLAY METAL SHEET DOOR, RECESSED HANDLE, DOUBLE HOSE REEL, VERTICAL SECTION FOR 2 TUBES



► SE2-3211.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

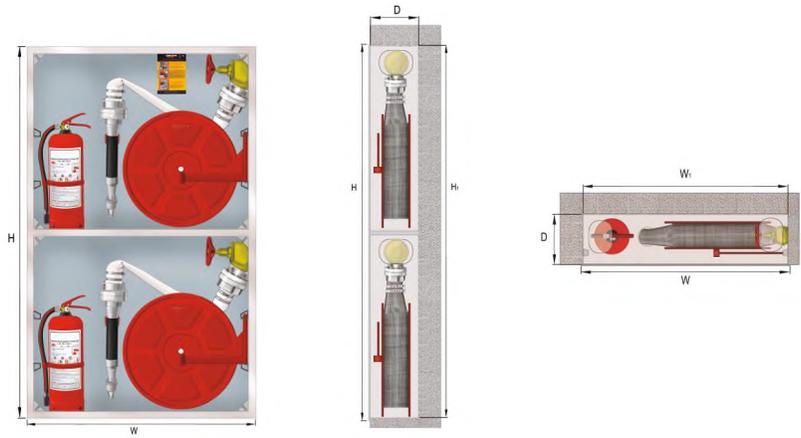

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-3211.1	Recessed	Double Full Overlay Metal Sheet Door, Recessed Handle	2" - 20 m	2 Tube / 6 kg	Optional	800	1400	200	760	1360
SE2-3211.3	Recessed	Double Full Overlay Metal Sheet Door, Recessed Handle	2" - 30 m	2 Tube / 6 kg	Optional	800	1400	200	760	1360
SE2-3221.1	Surface	Double Full Overlay Metal Sheet Door, Recessed Handle	2" - 20 m	2 Tube / 6 kg	Optional	800	1400	200	800	1400
SE2-3221.3	Surface	Double Full Overlay Metal Sheet Door, Recessed Handle	2" - 30 m	2 Tube / 6 kg	Optional	800	1400	200	800	1400

► CABINET HOUSING

- Produced from 1,2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation.
- Hose reel can be left or right mounted.
- Surface mount or recessed mount types obtainable.

► HOSE REEL

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► CABINET DOOR

- Full overlay metal sheet door, recessed handle
- Laser cut warning signs on the surface
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.

FIRE CABINET


LAY- FLAT HOSE

FULL OVERLAY METAL SHEET, DOUBLE DOOR, CHROME PLATED HANDLE, DOUBLE HOSE REEL, VERTICAL FIRE EXTINGUISHER SECTION FOR 2 TUBES



► SE2-3212.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

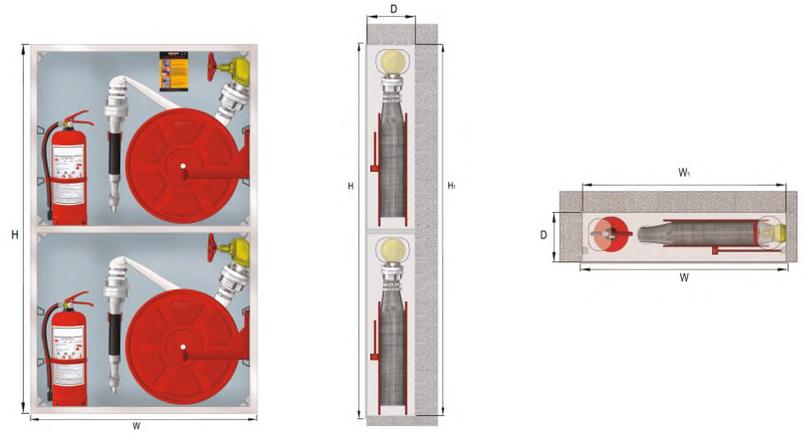

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-3212.1	Recessed	Full Overlay Metal Sheet, Double Door, Chrome Plated Handle	2" - 20 m	2 Tubes / 6 kg	Optional	800	1400	200	760	1360
SE2-3212.3	Recessed	Full Overlay Metal Sheet, Double Door, Chrome Plated Handle	2" - 30 m	2 Tubes / 6 kg	Optional	800	1400	200	760	1360
SE2-3222.1	Surface	Full Overlay Metal Sheet, Double Door, Chrome Plated Handle	2" - 20 m	2 Tubes / 6 kg	Optional	800	1400	200	800	1400
SE2-3222.3	Surface	Full Overlay Metal Sheet, Double Door, Chrome Plated Handle	2" - 30 m	2 Tubes / 6 kg	Optional	800	1400	200	800	1400

► **CABINET HOUSING**

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation.
- Hose reel can be left or right mounted.
- Surface mount or recessed mount types obtainable.

► **HOSE REEL**

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► **CABINET DOOR**

- Full overlay metal sheet door, chrome plated handle.
- Laser cut warning signs on the surface
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.

FIRE CABINET


LAY- FLAT HOSE

INSET METAL SHEET, DOUBLE DOOR, DOUBLE HOSE REEL, VERTICAL FIRE EXTINGUISHER SECTION FOR 2 TUBES



► SE2-3213.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

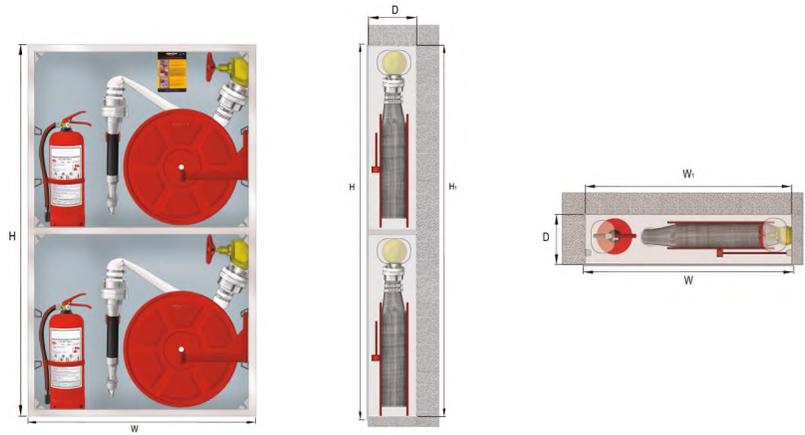

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-3213.1	Recessed	Inset Metal Sheet, Double Door	2" - 20 m	2 Tubes / 6 kg	Optional	800	1400	200	760	1360
SE2-3213.3	Recessed	Inset Metal Sheet, Double Door	2" - 30 m	2 Tubes / 6 kg	Optional	800	1400	200	760	1360
SE2-3223.1	Surface	Inset Metal Sheet, Double Door	2" - 20 m	2 Tubes / 6 kg	Optional	800	1400	200	800	1400
SE2-3223.3	Surface	Inset Metal Sheet, Double Door	2" - 30 m	2 Tubes / 6 kg	Optional	800	1400	200	800	1400

► CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation.
- Hose reel can be left or right mounted.
- Surface mount or recessed mount types obtainable.

► HOSE REEL

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" lat lay fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► CABINET DOOR

- Inset metal sheet door with frame, chrome plated handle.
- Relief warning signs on the surface.
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with continuous hinges, optionally stainless hinges or invisible hinges obtainable.

FIRE CABINET


LAY- FLAT HOSE

INSET GLASS, DOUBLE DOOR, DOUBLE HOSE REEL, VERTICAL FIRE EXTINGUISHER SECTION FOR 2 TUBES



► SE2-3214.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

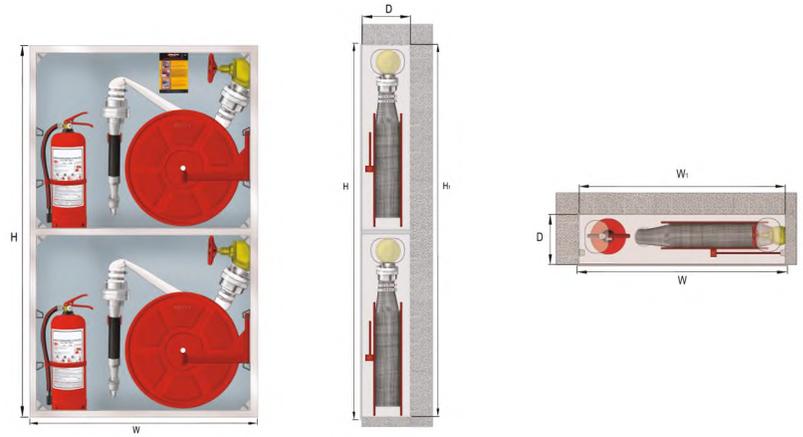

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-3214.1	Recessed	Inset Glass, Double Door	2" - 20 m	2 Tubes / 6 kg	Optional	800	1400	200	760	1360
SE2-3214.3	Recessed	Inset Glass, Double Door	2" - 30 m	2 Tubes / 6 kg	Optional	800	1400	200	760	1360
SE2-3224.1	Surface	Inset Glass, Double Door	2" - 20 m	2 Tubes / 6 kg	Optional	800	1400	200	800	1400
SE2-3224.3	Surface	Inset Glass, Double Door	2" - 30 m	2 Tubes / 6 kg	Optional	800	1400	200	800	1400

► CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation.
- Hose reel can be left or right mounted.
- Surface mount or recessed mount types obtainable.

► HOSE REEL

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" lat flay fire hose
- All connections are made with whipcheck safety cables instead of clamps.


► CABINET DOOR

- Inset glass door with frame, chrome plated handle.
- 4 mm thick tempered smoke glass
- Screen printed warning signs are fired at 700°C
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with continuous hinges, optionally stainless hinges or invisible hinges obtainable.

FIRE CABINET


LAY- FLAT HOSE

FULL OVERLAY GLASS, DOUBLE DOOR, DOUBLE HOSE REEL, VERTICAL FIRE EXTINGUISHER SECTION FOR 2 TUBES

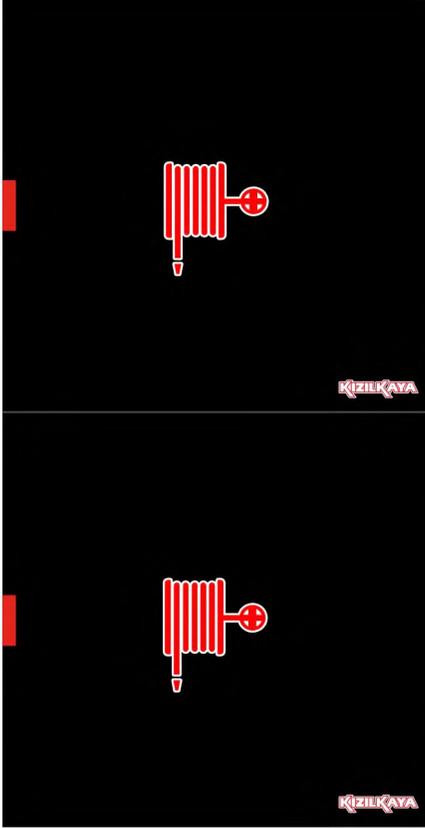

► SE2-3215.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL 1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

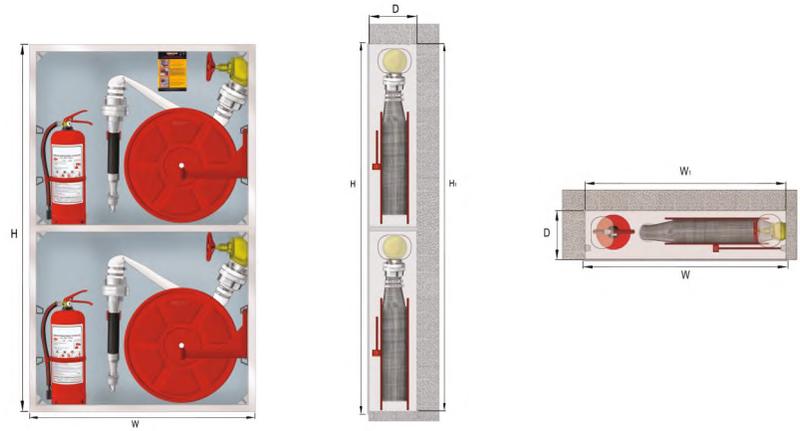

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-3215.1	Recessed	Full Overlay Glass, Double Door	2" - 20 m	2 Tubes / 6 kg	Optional	800	1400	200	760	1360
SE2-3215.3	Recessed	Full Overlay Glass, Double Door	2" - 30 m	2 Tubes / 6 kg	Optional	800	1400	200	760	1360
SE2-3225.1	Surface	Full Overlay Glass, Double Door	2" - 20 m	2 Tubes / 6 kg	Optional	800	1400	200	800	1400
SE2-3225.3	Surface	Full Overlay Glass, Double Door	2" - 30 m	2 Tubes / 6 kg	Optional	800	1400	200	800	1400

► CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation.
- Hose reel can be left or right mounted.
- Surface mount or recessed mount types obtainable.

► HOSE REEL

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" lat flay fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► CABINET DOOR

- Full overlay glass door,
- 4 mm thick tempered blackglass
- Screen printed warning signs are fired at 700°C
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.

FIRE CABINET


LAY- FLAT HOSE

FULL OVERLAY GLASS WITH FRAME, DOUBLE DOOR, CHROME PLATED HANDLE, DOUBLE HOSE REEL, VERTICAL FIRE EXTINGUISHER SECTION FOR 2 TUBES



► SE2-3216.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

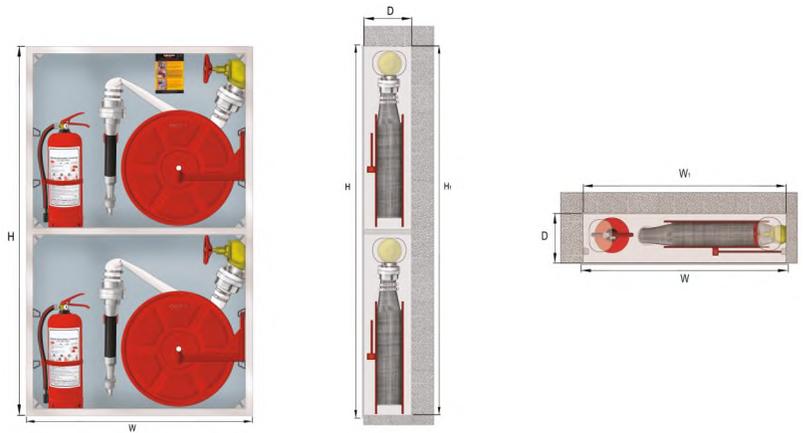

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W ₁ mm	H ₁ mm
SE2-3216.1	Recessed	Full Overlay Metal Sheet, Double Door, Chrome Plated Handle	2" - 20 m	2 Tubes / 6 kg	Optional	800	1400	200	760	1360
SE2-3216.3	Recessed	Full Overlay Metal Sheet, Double Door, Chrome Plated Handle	2" - 30 m	2 Tubes / 6 kg	Optional	800	1400	200	760	1360
SE2-3226.1	Surface	Full Overlay Metal Sheet, Double Door, Chrome Plated Handle	2" - 20 m	2 Tubes / 6 kg	Optional	800	1400	200	800	1400
SE2-3226.3	Surface	Full Overlay Metal Sheet, Double Door, Chrome Plated Handle	2" - 30 m	2 Tubes / 6 kg	Optional	800	1400	200	800	1400

► **CABINET HOUSING**

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation.
- Hose reel can be left or right mounted.
- Surface mount or recessed mount types obtainable.

► **HOSE REEL**

- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" flat fire hose
- All connections are made with whipcheck safety cables instead of clamps.

► **CABINET DOOR**

- Full overlay glass door with frame, chrome plated handle.
- 4 mm thick tempered smoke glass
- Screen printed warning signs are fired at 700°C
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.



