



Category 3

Fire Extinguishing Cabinets and Carts for Outdoor


OUTDOORS FIRE CABINET | LAY – FLAT HOSE

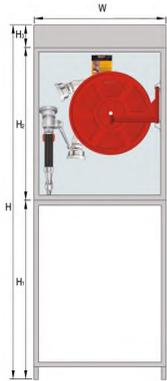


► K3-211.1

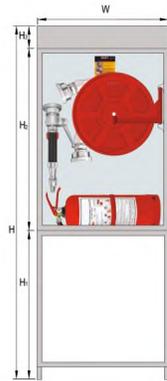

► K3-221.1

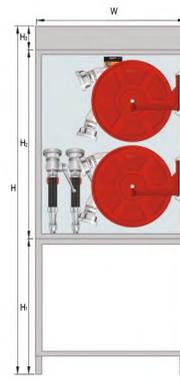

► K3-231.1

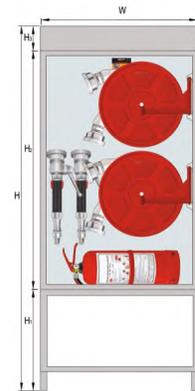

► K3-241.1

- 2½" flat type fire hose and 2½" fire lance are optional.
- All parts are painted with weather – proof electrostatic powder paint at 200°C, standart colour is red (RAL 3003),other colours are available to meet specific needs
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel
- All models can be manufactured with front and rear doors.

CODE	PLACE OF USE	CABINET TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	H ₁ mm	H ₂ mm	H ₃ mm	D mm
K3-211.1	Outdoors	Single Hose Reel	2" - 20 m	-	Optional	600	1400	600	700	100	200
K3-211.3	Outdoors	Single Hose Reel	2" - 30 m	-	Optional	600	1400	600	700	100	200
K3-221.1	Outdoors	Single Hose Reel, Horizontal Tube Section	2" - 20 m	1 Tube 6 kg	Optional	700	1500	600	800	100	200
K3-221.3	Outdoors	Single Hose Reel, Horizontal Tube Section	2" - 30 m	1 Tube 6 kg	Optional	700	1500	600	800	100	200
K3-231.1	Outdoors	Double Hose Reel	2" - 20 m	-	Optional	700	1600	500	1000	100	200
K3-231.3	Outdoors	Double Hose Reel	2" - 30 m	-	Optional	700	1600	500	1000	100	200
K3-241.1	Outdoors	Double Hose Reel, Horizontal Tube Section	2" - 20 m	1 Tube 6 kg	Optional	700	1600	300	1200	100	200
K3-241.3	Outdoors	Double Hose Reel, Horizontal Tube Section	2" - 30 m	1 Tube 6 kg	Optional	700	1600	300	1200	100	200

► CABINET HOUSING

- Produced of 1,5 mm galvanized metal sheet.
- Suitable for field conditions.
- With special cover and legs for floor installation

► HOSE REEL


- Reel crank allows hose reel to be opened at an angle of 270°.
- 2" Fire lance and
- 2" flat fire hose with 2" hose sleeve
- All connections are made with whipcheck safety cables instead of clamps.

► CABINET DOOR

- Fixed metal sheet door, chrome plated handle.
- Warning signs on the surface.
- 180 degree opening door with continuous hinges, optionally stainless hinges or invisible hinges obtainable.

We reserve the right to make changes in design and size. | Our products are patented by the Turkish Patent Office

OUTSIDE FIRE CABINET | 1" SEMI – RIGID HOSE REEL, AXIAL WATER SUPPLY

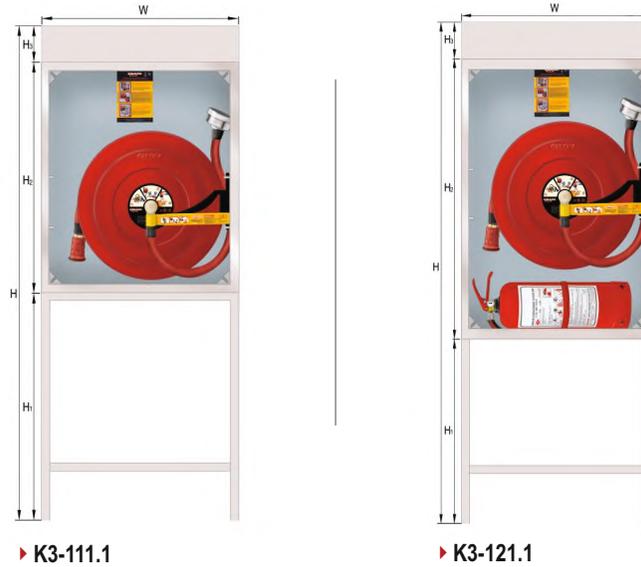

► K3-111.1

► K3-121.1

- 2½" fire valve is optional
- All parts are painted with weather – proof electrostatic powder paint at 200°C, standart colour is red (RAL 3003),other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets can be optionally produced from stainless steel.
- All models can be manufactured with front and rear doors.

CODE	PLACE OF USE	CABINET TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	H ₁ mm	H ₂ mm	H ₃ mm	D mm
K3-111.1	Outdoors	Single Hose Reel	1" - 20 m	-	Optional	700	1500	600	800	100	200
K3-111.2	Outdoors	Single Hose Reel	1" - 25 m	-	Optional	700	1500	600	800	100	200
K3-111.3	Outdoors	Single Hose Reel	1" - 30 m	-	Optional	700	1500	600	800	100	200
K3-121.1	Outdoors	Single Hose Reel, Horizontal Tube Section	1" - 20 m	1 Tube 6 kg	Optional	700	1600	500	1000	100	200
K3-121.2	Outdoors	Single Hose Reel, Horizontal Tube Section	1" - 25 m	1 Tube 6 kg	Optional	700	1600	500	1000	100	200
K3-121.3	Outdoors	Single Hose Reel, Horizontal Tube Section	1" - 30 m	1 Tube 6 kg	Optional	700	1600	500	1000	100	200

► CABINET HOUSING

- Produced of 1,5 mm galvanized metal sheet.
- Suitable for field conditions.
- With special cover and legs for floor installation

► HOSE REEL

- Axial water supply. Water inlet made of rust-resistant material.
- Solid 6 mm crank allows hose reel to be opened at an angle of 270°.
- Includes 2" fire valve and 2" x1" reducing valve.
- Nozzle with 1" jet / spray / lock setting.
- 1 " round, semi – rigid hose.
- Inside hardened connection hose connects hose reel with valve
- All connections are made with press fitting instead of clamp fitting
- All hose reels have been tested.

► CABINET DOOR

- Fixed metal sheet door, chrome plated handle.
- Warning signs on the surface
- 180 degree opening door with continuous hinges, optionally stainless hinges or invisible hinges obtainable.

HORIZONTAL OUTDOORS FIRE CABINET | LAY – FLAT HOSE



► K5-211.1

- 2½" flat type fire hose, 2½" fire valve and 2½" fire lance are optional
- All parts are painted with weather – proof electrostatic powder paint at 200°C, standart colour is red (RAL 3003),other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel.

CODE	PLACE OF USE	CABINET TYPE	HOSE DIAMETER & LENGTH	W mm	H mm	D mm
K5-211.1	Outdoors	Single Hose Reel	2" - 20 m	1000	700	550
K5-211.3	Outdoors	Single Hose Reel	2" - 30 m	1000	700	550
K5-221.1	Outdoors	Double Hose Reel	2" - 20 m	1000	700	550
K5-221.3	Outdoors	Double Hose Reel	2" - 30 m	1000	700	550

► CABINET HOUSING

- Produced of 1,5 mm galvanized metal sheet.
- Suitable for field conditions.
- With special cover and legs for floor installation

► HOSE REEL

- 2" Fire valve and 2" hose sleeve
- 2" Fire lance and 2" hose sleeve
- 2" lat flay fire hose
- All connections are made with whipcheck safety cables instead of clamps.

HORIZONTAL OUTDOORS FIRE CABINET

1" SEMI – RIGID HOSE REEL, AXIAL WATER SUPPLY



► K5-111.1

- Fire cabinets are painted with weather – proof electrostatic powder paint at 200°C, standart colour is red (RAL 3003)
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets can be optionally produced from stainless steel.

CODE	PLACE OF USE	CABINET TYPE	HOSE DIAMETER & LENGTH	W mm	H mm	D mm
K5-111.1	Outdoors	Single Hose Reel	1" - 20 m	1000	700	550
K5-111.2	Outdoors	Single Hose Reel	1" - 25 m	1000	700	550
K5-111.3	Outdoors	Single Hose Reel	1" - 30 m	1000	700	550
K5-121.1	Outdoors	Double Hose Reel	1" - 20 m	1000	700	550
K5-121.2	Outdoors	Double Hose Reel	1" - 25 m	1000	700	550
K5-121.3	Outdoors	Double Hose Reel	1" - 30 m	1000	700	550

► CABINET HOUSING

- Produced of 1,5 mm galvanized metal sheet.
- Suitable for field conditions.
- With special cover and legs for floor installation

► YANGIN DOLABININ MAKARASI

- Axial water supply. Water inlet made of rust-resistant material.
- Solid 6 mm crank allows hose reel to be opened at an angle of 270°.
- Includes 2" fire valve and 2" x1" reducing valve.
- Nozzle with 1 "jet / spray / lock setting.
- 1" round, semi – rigid hose.
- Inside hardened connection hose connects hose reel with valve
- All connections are made with press fitting instead of clamp fitting
- All hose reels have been tested.

FIRE HOSE CART | 1" SEMI – RIGID HOSE REEL, AXIAL WATER SUPPLY



► K6-101.3

- The fire cart with long fire hose has been designed to provide a fast and effective first response to fighting fires at long distances. It can be used indoors and outdoors by attaching to a local hydrant/water supply.
- All parts are painted with weather – proof electrostatic powder paint at 200°C, standart colour is red (RAL 3003),other colours are available to meet specific needs.

CODE	PLACE OF USE	HOSE DIAMETER & LENGTH
K6-101.3	Indoors and Outdoors	1" - 30 m
K6-101.4	Indoors and Outdoors	1" - 40 m
K6-101.5	Indoors and Outdoors	1" - 50 m

► HOSE REEL

- Axial water supply. Water inlet made of rust-resistant material.
- Solid 6 mm crank allows hose reel to be opened at an angle of 270°.
- Includes 2" fire valve and 2" x1" reducing valve.
- Nozzle with 1" jet / spray / lock setting.
- 1" round, semi – rigid hose.
- Inside hardened connection hose connects hose reel with valve
- All connections are made with press fitting instead of clamp fitting
- All hose reels have been tested.

