

Category 5

Fire Extinguishing Tubes, Extinguishing Tube Cabinets and Miscallenous Cabinets

FIRE EXTINGUISHING TUBES

DRY CHEMICAL POWDER FIRE EXTINGUISHING TUBES



CAPACITY	TYPE	EXTINGUISHER CLASS	OPERATING PRESSURE	TEST PRESSURE	SPRAY DISTANCE
1 kg	Portable Type	A,B,C	17 Bar	25 Bar	3 - 4 m.
2 kg	Portable Type	A,B,C	17 Bar	25 Bar	3 - 4 m.
4 kg	Portable Type	A,B,C	17 Bar	25 Bar	3 - 4 m.
6 kg	Portable Type	A,B,C	17 Bar	25 Bar	4 - 5 m.
9 kg	Portable Type	A,B,C	17 Bar	25 Bar	4 - 5 m.
12 kg	Portable Type	A,B,C	17 Bar	25 Bar	4 - 5 m.
12 kg	Mobile Type	A,B,C	18 Bar	25 Bar	4 - 5 m.
25 kg	Mobile Type	A,B,C	18 Bar	25 Bar	4 - 5 m.
50 kg	Mobile Type	A,B,C	18 Bar	30 Bar	4 - 5 m.
250 kg	Cart Type	A,B,C	22 Bar	33 Bar	10 - 12 m.

- Preferred in fires caused by flammable materials, flammable liquids.

- CE 0036 Certified.
- TS 862 EN 3 Certified.
- ISO 9001 Certified.
- 2 year warranty.
- With manometer
- Spinned body produced of 1,5 mm metal sheet.
- N2 (Nitrogen) propellant.
- -20°C / +60°C operating temperature.
- Safety valve.
- With hanger.
- Carts and wheels suitable for model and capacity
- Extinguishing medium is dry chemical powder.

FIRE EXTINGUISHING TUBES

CARBON DIOXIDE (CO₂) FIRE EXTINGUISHERS



- CE 0036 Certified.
- TS 862 EN 3 Certified.
- ISO 9001 Certified.
- 2-year warranty..
- Extinguisher agent is carbon dioxide
- Body is made of longdrawn steel, welded seamless, monolithic.
- -20°C / +60°Coperating temperature.
- Safety valve.
- Trolley and wheels suitable for model and capacity

CAPACITY	TYPE	EXTINGUISHER CLASS	OPERATING PRESSURE	TEST PRESSURE	SPRAY DISTANCE
2 kg	Portable Type	B,C	150 Bar	250 Bar	2 m.
5 kg	Portable Type	B,C	150 Bar	250 Bar	4 m.
10 kg	Mobile Type	B,C	150 Bar	250 Bar	6 m.
30 kg	Mobile Type	B,C	150 Bar	250 Bar	6 m.
45 kg	Mobile Type	B,C	150 Bar	250 Bar	6 m.

- Especially preferred in fires caused by flammable liquids and electrical hazards.

FOAM FIRE EXTINGUISHERS



- CE 0036 Certified.
- TS 862 EN 3 Certified.
- ISO 9001 Certified.
- 2-year warranty..
- N₂ (Nitrogen) propellant.
- Body is made of longdrawn steel, welded seamless, monolithic.
- +4°C / +60°Coperating temperature.
- Safety valve
- Askı aparatıdır.
- Trolley and wheels suitable for model and capacity
- Extinguishing medium is AFF Foam

CAPACITY	TYPE	EXTINGUISHER CLASS	OPERATING PRESSURE	TEST PRESSURE	SPRAY DISTANCE
6 kg	Portable Type	A,B	17 Bar	25 Bar	3 - 4 m.
9 kg	Portable Type	A,B	17 Bar	25 Bar	3 - 4 m.
25 kg	Mobile Type	A,B	17 Bar	25 Bar	4 - 5 m.
50 kg	Mobile Type	A,B	17 Bar	30 Bar	4 - 5 m.

- Preferred in fires. caused by materials like solvent, coke, alcohol, sponge, wood, wood or paper

FIRE EXTINGUISHING TUBES HALOCARBON GAS FIRE EXTINGUISHERS



- CE 0036 Certified.
- TS 862 EN 3 Certified.
- ISO 9001 Certified.
- 2-year warranty..
- N2 (Nitrogen) propellant.
- Body is made of longdrawn steel, welded seamless, monolithic.
- -20°C / +60°C operating temperature.
- Safety valve
- With hanger
- Fire extinguishing medium: Halocarbon gas

CAPACITY	TYPE	EXTINGUISHER CLASS	OPERATING PRESSURE	TEST PRESSURE	SPRAY DISTANCE
1 kg	Portable Type	A,B	17 Bar	25 Bar	3 - 4 m.
2 kg	Portable Type	A,B	17 Bar	25 Bar	3 - 4 m.
4 kg	Portable Type	A,B	17 Bar	25 Bar	3 - 4 m.
6 kg	Portable Type	A,B	17 Bar	25 Bar	3 - 4 m.
12 kg	Portable Type	A,B	17 Bar	25 Bar	3 - 4 m.

- Preferred in fires which caused by computing rooms, UPS, computer environments, high voltage panels, transformers, electronic circuits and devices.

WATER FIRE EXTINGUISHING TUBES



- CE 0036 Certified.
- TS 862 EN 3 Certified.
- ISO 9001 Certified.
- 2 year warranty.
- N2 (Nitrogen) propellant.
- Body is made of longdrawn steel, welded seamless, monolithic.
- -20°C / +60°C operating temperature.
- Safety valve
- With hanger
- Extinguishing agent: Water

CAPACITY	TYPE	EXTINGUISHER CLASS	OPERATING PRESSURE	TEST PRESSURE	SPRAY DISTANCE
6 kg	Portable Type	A	17 Bar	25 Bar	3 - 4 m.

- Preferred in fires caused by materials of organic origin such as paper, cotton, straw, wood, coal, textile, products.

FIRE EXTINGUISHING TUBES**D METAL POWDER FIRE EXTINGUISHING TUBES**

CAPACITY	TYPE	EXTINGUISHER CLASS	OPERATING PRESSURE	TEST PRESSURE	SPRAY DISTANCE
6 kg	Portable Type	A,B	150 Bar	250 Bar	2 m.
12 kg	Portable Type	A,B	150 Bar	250 Bar	4 m.
50 kg	Mobile Type	A,B	150 Bar	250 Bar	6 m.

- Preferred in fires caused by high heat burning and hard-hitting light metal materials such as sodium, potassium, titanium, magnesium, calcium, aluminum

- CE 0036 Certified.
- TS 862 EN 3 Certified.
- ISO 9001 Certified.
- 2-year warranty..
- Extinguishing medium is D metal powder
- Body is made of longdrawn steel, welded seamless, monolithic.
- -30°C / +60°C operating temperature.
- Safety valve
- With hanger
- Trolley and wheels suitable for model and capacity

FIRE CABINET



► K-01.014



► K-01.120

CODE	MOUNTING TYPE	MODULAR DOOR TYPE	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W1 mm	H1 mm
K-01.013	RECESSIVE	Inset Metal Sheet Door	2 Tube 6 kg	Optional	600	700	200	560	660
K-01.014	RECESSIVE	Inset Glass Door	2 Tube 6 kg	Optional	600	700	200	560	660
K-01.023	SURFACE	Inset Metal Sheet Door	2 Tube 6 kg	Optional	600	700	200	600	700
K-01.024	SURFACE	Inset Glass Door	2 Tube 6 kg	Optional	600	700	200	600	700
K-01.120	SURFACE	Inset Glass Door	1 Tube 6 kg	Optional	350	700	200	350	700

► CABINET HOUSING

- Produced of 1,5 mm galvanized metal sheet.
- Capable of receiving 6 kg fire tube.

► CABINET DOOR


- Modular steel doors, with radial frames and stainless handles or modular glass doors with radial frames and chrome plated handles. obtainable
- Relief warning signs on the surface.
- 180 degree opening door with continuous hinges, optionally stainless hinges or invisible hinges obtainable teşe veya gizli menteşe olarak da üretilebilir.

► GENERAL FEATURES

- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.

MISCELLANEOUS CABINETS

FIRE HYDRANT CABINET

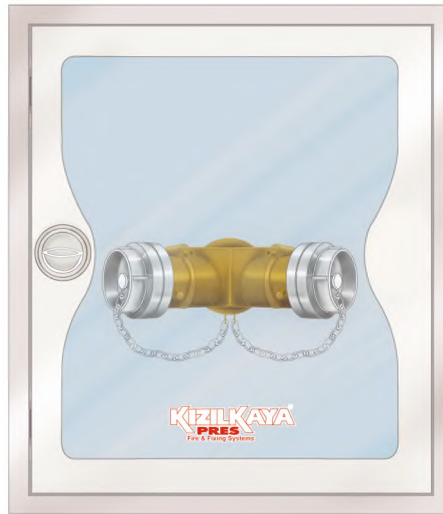

EQUIPMENT CABINET

