


FIRE CABINET

1" SEMI – RIGID HOSE REEL, AXIAL WATER SUPPLY

FULL OVERLAY GLASS WITH FRAME, DOUBLE DOOR, CHROME PLATED HANDLE, DOUBLE HOSE REEL, HORIZONTAL FIRE EXTINGUISHER SECTION



- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

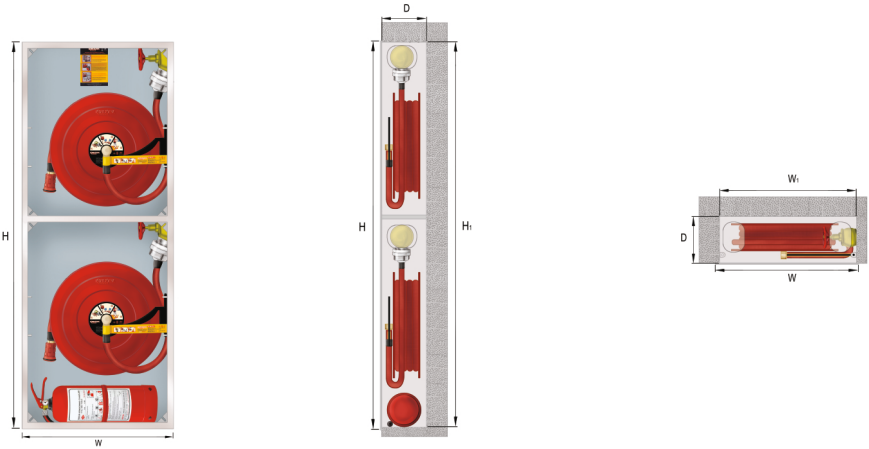

► SE1-2416.1

| CODE | MOUNTING STYLE | MODULAR DOOR TYPE | HOSE DIAMETER & LENGTH | TUBE CAPACITY | LIGHTING | W mm | H mm | D mm | W ₁ mm | H ₁ mm |
|------------|----------------|---|------------------------|---------------|----------|---------|---------|---------|----------------------|----------------------|
| SE1-2416.1 | Recessed | Full Overlay Glass With Frame, Double Door;Chrome Plated Handle | 1" - 20 m | 1 Tube / 6 kg | Optional | 700 | 1800 | 200 | 660 | 1760 |
| SE1-2416.2 | Recessed | Full Overlay Glass With Frame, Double Door;Chrome Plated Handle | 1" - 25 m | 1 Tube / 6 kg | Optional | 700 | 1800 | 200 | 660 | 1760 |
| SE1-2416.3 | Recessed | Full Overlay Glass With Frame, Double Door;Chrome Plated Handle | 1" - 30 m | 1 Tube / 6 kg | Optional | 700 | 1800 | 200 | 660 | 1760 |
| SE1-2426.1 | Surface | Full Overlay Glass With Frame, Double Door;Chrome Plated Handle | 1" - 20 m | 1 Tube / 6 kg | Optional | 700 | 1800 | 200 | 700 | 1800 |
| SE1-2426.2 | Surface | Full Overlay Glass With Frame, Double Door;Chrome Plated Handle | 1" - 25 m | 1 Tube / 6 kg | Optional | 700 | 1800 | 200 | 700 | 1800 |
| SE1-2426.3 | Surface | Full Overlay Glass With Frame, Double Door;Chrome Plated Handle | 1" - 30 m | 1 Tube / 6 kg | Optional | 700 | 1800 | 200 | 700 | 1800 |

► CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation.
- Hose reel can be left or right mounted.
- Surface mount or recessed mount types obtainable.

► HOSE REEL

- Axial water supply. Water inlet made of rust-resistant material.
- Solid 6 mm crank allows hose reel to be opened at an angle of 270°.
- Includes 2" fire valve and 2" x1" reducing valve.
- Nozzle with 1" jet / spray / lock setting.
- 1" round, semi – rigid hose.
- Inside hardened connection hose connects hose reel with valve
- All connections are made with press fitting instead of clamp fitting
- All hose reels have been tested.

► CABINET DOOR

- Full overlay glass door with frame, chrome plated handle.
- 4 mm thick tempered smoke glass
- Screen printed warning signs are fired at 700°C
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.