

**FIRE CABINET**


**1" SEMI - RIGID HOSE REEL, AXIAL WATER SUPPLY**

FULL OVERFLAY METAL SHEET DOOR, CHROME PLATED HANDLE, HORIZONTAL FIRE EXTINGUISHER SECTION



▶ SE1-1412.1

- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL 1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.

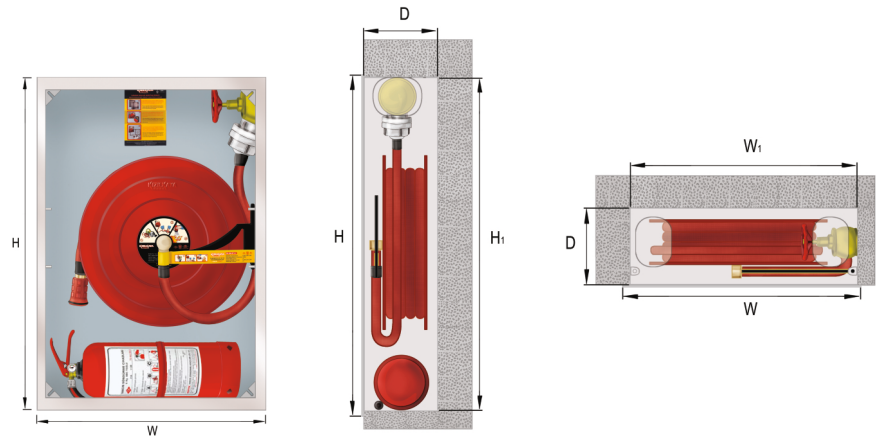

| CODE       | MOUNTING STYLE | MODULAR DOOR TYPE                              | HOSE DIAMETER & LENGTH | TUBE CAPACITY | LIGHTING | W mm | H mm | D mm | W <sub>1</sub> mm | H <sub>1</sub> mm |
|------------|----------------|--|------------------------|---------------|----------|------|------|------|-------------------|-------------------|
| SE1-1412.1 | Recessed       | Full Overlay Metal Sheet, Chrome Plated Handle | 1" - 20 m              | 1 Tube / 6 kg | Optional | 700  | 1000 | 200  | 660               | 960               |
| SE1-1412.2 | Recessed       | Full Overlay Metal Sheet, Chrome Plated Handle | 1" - 25 m              | 1 Tube / 6 kg | Optional | 700  | 1000 | 200  | 660               | 960               |
| SE1-1412.3 | Recessed       | Full Overlay Metal Sheet, Chrome Plated Handle | 1" - 30 m              | 1 Tube / 6 kg | Optional | 700  | 1000 | 200  | 660               | 960               |
| SE1-1422.1 | Surface        | Full Overlay Metal Sheet, Chrome Plated Handle | 1" - 20 m              | 1 Tube / 6 kg | Optional | 700  | 1000 | 200  | 700               | 1000              |
| SE1-1422.2 | Surface        | Full Overlay Metal Sheet, Chrome Plated Handle | 1" - 25 m              | 1 Tube / 6 kg | Optional | 700  | 1000 | 200  | 700               | 1000              |
| SE1-1422.3 | Surface        | Full Overlay Metal Sheet, Chrome Plated Handle | 1" - 30 m              | 1 Tube / 6 kg | Optional | 700  | 1000 | 200  | 700               | 1000              |

▶ **CABINET HOUSING**

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation.
- Hose reel can be left or right mounted.
- Surface mount or recessed mount types obtainable.

▶ **HOSE REEL**

- Axial water supply. Water inlet made of rust-resistant material.
- Solid 6 mm crank allows hose reel to be opened at an angle of 270°.
- Includes 2" fire valve and 2" x1" reducing valve.
- Nozzle with 1" jet / spray / lock setting.
- 1" round, semi - rigid hose.
- Inside hardened connection hose connects hose reel with valve
- All connections are made with press fitting instead of clamp fitting
- All hose reels have been tested.

▶ **CABINET DOOR**

- Full overlay metal sheet, chrome plated handle
- Laser cut warning signs on the surface.
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.