



FIRE CABINET


1" SEMI – RIGID HOSE REEL, AXIAL WATER SUPPLY

FULL OVERLAY METAL SHEET DOOR, RECESSED HANDLE, DOUBLE HOSE REEL, VERTICAL FIRE EXTINGUISHER SECTION FOR 2 TUBES

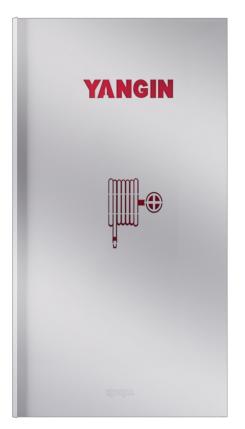

- All parts are painted with electrostatic powder paint at 200°C, optionally in the colours RAL 9010 white, RAL 3003 red or RAL1013 champagne. Other colours are available to meet specific needs.
- This fire cabinet models are in compliance with EN 671-1.
- Fire cabinets and their doors can be optionally produced from stainless steel and with decorative cutouts to suit various architectural requirements.
- All models can be manufactured with front and rear doors.





SE1-2511.1

CODE	MOUNTING STYLE	MODULAR DOOR TYPE	HOSE DIAMETER & LENGTH	TUBE CAPACITY	LIGHTING	W mm	H mm	D mm	W, mm	H, mm
SE1-2511.1	Recessed	Full Overlay Metal Sheet Door, Recessed Handle	1" - 20 m	2 Tubes / 6 kg	Optional	850	1600	200	810	1560
SE1-2511.2	Recessed	Full Overlay Metal Sheet Door, Recessed Handle	1" - 25 m	2 Tubes / 6 kg	Optional	850	1600	200	810	1560
SE1-2511.3	Recessed	Full Overlay Metal Sheet Door, Recessed Handle	1" - 30 m	2 Tubes / 6 kg	Optional	850	1600	200	810	1560
SE1-2521.1	Surface	Full Overlay Metal Sheet Door, Recessed Handle	1" - 20 m	2 Tubes / 6 kg	Optional	850	1600	200	850	1600
SE1-2521.2	Surface	Full Overlay Metal Sheet Door, Recessed Handle	1" - 25 m	2 Tubes / 6 kg	Optional	850	1600	200	850	1600
SE1-2521.3	Surface	Full Overlay Metal Sheet Door, Recessed Handle	1" - 30 m	2 Tubes / 6 kg	Optional	850	1600	200	850	1600

CABINET HOUSING

- Produced from 1.2 mm mild steel (DKP).
- Flaps at every corner for fire valve installation.
- Hose reel can be left or right mounted.
- Surface mount or recessed mount types obtainable.

HOSE REEL

- Axial water supply. Water inlet made of rust-resistant material.
- Solid 6 mm crank allows hose reel to be opened at an angle of 270°.
- Includes 2" fire valve and 2" x1" reducing valve.
- Nozzle with 1" jet / spray / lock setting.
 1" round semi rigid hose
- 1" round, semi rigid hose.
 Inside bardened connection h
- Inside hardened connection hose connects hose reel with valve
- All connections are made with press fitting instead of clamp fitting
- All hose reels have been tested.

CABINET DOOR

- Full overlay metal sheet door, recessed handle.
- Laser cut warning signs on the surface.
- After the housing has been mounted on the wall, the doors can be simply attached to the housing with 4 screws.
- 180 degree opening door with semi-hidden continuous hinges.

We reserve the right to make changes in design and size. | Our products are patented by the Turkish Patent Office